

OVERVIEW



1. HDMI	5. Power button
2. USB-C (USB 10Gbps), with USB PD 45-65W & DP 1.4	6. microSD card reader
3. USB-C (USB 10Gbps), with USB PD 45-65W & DP 1.4	7. USB-A (USB 5Gbps)
4. Headphone / microphone combo jack (3.5mm)	8. USB-A (USB 5Gbps), Always On

PERFORMANCE

Processor

Processor Family

AMD Ryzen™ 5 / 7 7000 Series Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
AMD Ryzen™ 5 7535HS	6	12	3.3GHz	4.55GHz	3MB L2 / 16MB L3	AMD Radeon™ 660M
AMD Ryzen™ 7 7735HS	8	16	3.2GHz	4.75GHz	4MB L2 / 16MB L3	AMD Radeon™ 680M

Operating System

Operating System**

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- No preload operating system

Graphics

Graphics**

Graphics	Type	Memory	Key Features
AMD Radeon™ 660M	Integrated	Shared	DirectX® 12
AMD Radeon™ 680M	Integrated	Shared	DirectX® 12

Monitor Support

Monitor Support

Supports up to 4 independent displays (native display and 3 external monitors via HDMI® and USB-C®)

- HDMI® supports up to 4K@60Hz
- USB-C® supports up to 4K@60Hz

Chipset

Chipset

AMD SoC (System on Chip) platform

Memory

Max Memory

- 16GB soldered memory, not upgradable
- 32GB soldered memory, not upgradable

Memory Slots

Memory soldered to systemboard, no slots, dual-channel

Memory Type^[1]

LPDDR5X-6400

Notes:

[1] Installed memory is LPDDR5X, but runs as LPDDR5 due to platform limitation.

Storage

Max Storage Support^{[1][2]}

Up to two drives, 2x M.2 SSD

- M.2 2242 SSD up to 1TB

Storage Slot^[3]

Two M.2 2280 PCIe® 4.0 x4 slots

Storage Type

Disk Type	Interface	Offering
-----------	-----------	----------

M.2 2242 SSD	PCIe® NVMe®, PCIe® 4.0 x4	512GB / 1TB
--------------	---------------------------	-------------

Notes:

- [1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.
- [2] The system supports dual SSD via two M.2 slots, but Lenovo® offers only one SSD configuration with a second slot for user self-expansion.
- [3] The actual data transfer rate of the following PCIe® interface also depends on the capabilities of the connected PCIe® device. The listed values represent theoretical maximums.
- PCIe® 3.0 (x2 / x4): 2 GB/s (16 Gbps) / 4 GB/s (32 Gbps);
- PCIe® 4.0 (x2 / x4): 4 GB/s (32 Gbps) / 8 GB/s (64 Gbps);
- PCIe® 5.0 (x2 / x4): 8 GB/s (64 Gbps) / 16 GB/s (128 Gbps).

Removable Storage

Card Reader

microSD card reader

Multi-Media

Audio Chip

High Definition (HD) Audio

Speakers

Stereo speakers, 2W x2, optimized with Dolby Audio™

Microphone

Dual-microphone array

Camera

FHD 1080p + IR, with privacy shutter, fixed focus, with ToF sensor

Battery

Battery**

- 54.7Wh Rechargeable Li-ion Battery, supports Rapid Charge Boost (get 2 hours of runtime with a 15-minute charge)
- 70Wh Rechargeable Li-ion Battery, supports Rapid Charge Boost (get 2 hours of runtime with a 15-minute charge)

Max Battery Life^[1]

Local video (1080p) playback@150nits: 21.4 hr

Notes:

- [1] All battery life claims are approximate maximum and based on results using the MobileMark® 2014, MobileMark® 2018, MobileMark® 25, MobileMark® 30, JEITA 2.0, JEITA 3.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary depending on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter**^[1]

- 65W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® slim (wall-mount) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter

Notes:

- [1] AC adapter offerings depend on the country.

DESIGN

Display

Display**

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Refresh Rate	Viewing Angle	Key Features
------	------------	-------	------	------------	---------	--------------	----------------	-------------	--------------	---------------	--------------

										(L/R/U/D)	
15.1"	WQXGA (2560x1600)	Non-touch	OLED	500nits	Glossy	16:10	100,000:1	100% DCI-P3	165Hz	89° / 89° / 89° / 89°	TÜV Rheinland® Low Blue Light (Hardware), DisplayHDR™ True Black 600
15.3"	WUXGA (1920x1200)	Non-touch	IPS ^[1]	300nits	Anti-glare	16:10	1200:1	100% sRGB	60Hz	89° / 89° / 89° / 89°	TÜV Rheinland® Low Blue Light (Software)

Touchscreen

Non-touch

Notes:

[1] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

Input Device

Pen

No support

Keyboard

6-row, multimedia Fn keys, key travel 1.3mm, Copilot key

Keyboard Backlight

- LED backlight
- Non-backlight

Touchpad

Buttonless glass surface multi-touch touchpad, supports Precision TouchPad (PTP), 80 x 135 mm (3.15 x 5.31 inches)

Mechanical

Dimensions (WxDxH)^[1]

339.33 x 236 x 15.6 mm (13.36 x 9.29 x 0.61 inches)

Weight^[2]

Around 1.49 kg (3.28 lbs)

Case Color**

- Cloud grey
- Seafoam green

Case Material

Aluminium (top), aluminium (bottom)

Surface Treatment

Aluminium stamping (anodized with sandblasting)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

WLAN + Bluetooth^[1]

Wi-Fi® 6, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 card

WWAN

No support

Ethernet

No onboard Ethernet

Notes:

[1] Wi-Fi® operation (including Wi-Fi® 6, Wi-Fi® 6E, Wi-Fi® 7, etc.) is subject to the regulatory requirements of each country. Bluetooth® may operate at a lower version than hardware design depending on the factors such as operating system, driver, etc.

Ports^[1]

Standard Ports

- 1x USB-A (USB 5Gbps / USB 3.2 Gen 1)
- 1x USB-A (USB 5Gbps / USB 3.2 Gen 1), Always On
- 2x USB-C® (USB 10Gbps / USB 3.2 Gen 2), with USB PD 45-65W and DisplayPort™ 1.4
- 1x HDMI® 2.1, up to 4K/60Hz
- 1x Headphone / microphone combo jack (3.5mm)
- 1x microSD card reader

Notes:

[1] The transfer speed of the ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

Docking

Docking

Various docking solutions supported via USB-C®.

For more compatible docking solutions, please visit [Docking for IdeaPad® Slim 5 15ARP10](#)

SECURITY & PRIVACY

Security

Security Chip

Firmware TPM 2.0 integrated in SoC

Fingerprint Reader

No fingerprint reader

BIOS Security

- Administrator password
- Master hard disk password
- Power-on password
- User hard disk password
- User password
- Self-healing BIOS
- More BIOS security features, please visit [BIOS Simulator^{\[1\]}](#)

Other Security

- Camera privacy shutter
- IR camera for Windows® Hello (facial recognition)

Notes:

[1] The BIOS simulator is just for reference. Default settings and some options may vary depending on the hardware, operating system and BIOS version.

SERVICE

Warranty

Base Warranty**

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 2-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) courier or carry-in service

ACCESSORIES

Bundled Accessories

Bundled Accessories**^[1]

- Lenovo® WL310 Bluetooth® Silent Mouse (grey)
- Lenovo® WL310 Bluetooth® Silent Mouse without battery
- None

Notes:

[1] For more compatible accessory solutions, please visit [Accessories for IdeaPad® Slim 5 15ARP10](#).

OPERATING REQUIREMENTS

Operating Environment

Temperature^[1]

- At altitudes up to 2438 m (8,000 ft)
 - Operating: 5°C to 35°C (41°F to 95°F)
 - Storage: 5°C to 43°C (41°F to 109°F)
- At altitudes above 2438 m (8,000 ft)
 - Maximum temperature when operating under the unpressurized condition: 31.3°C (88°F)

Relative Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

CERTIFICATIONS

Green Certifications^[1]

Green Certifications^[2]

- ENERGY STAR® 9.0
- EPEAT Gold Registered^[3]
- ErP Lot 6/26
- RoHS compliant

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2] EPEAT registration and ENERGY STAR® certification are optional and only available on the models with preloaded OS. Please visit epeat.net and energystar.gov for more information.

[3] EPEAT is registered where applicable, please visit epeat.net for registration status by country.

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed (21 test items)

Other Certifications

- (Optional) TÜV Rheinland® Low Blue Light (Hardware Solution)
- (Optional) TÜV Rheinland® Low Blue Light (Software Solution)

- Feature with ** means that only one option listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.

- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS",

WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.

- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



AMD




AMD




AMD



AMD

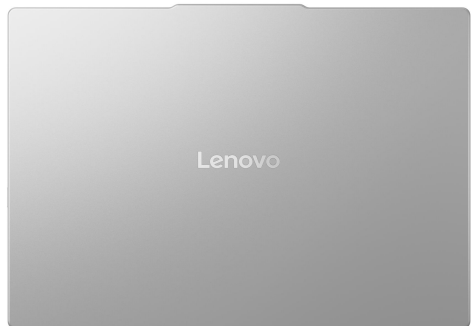

AMD

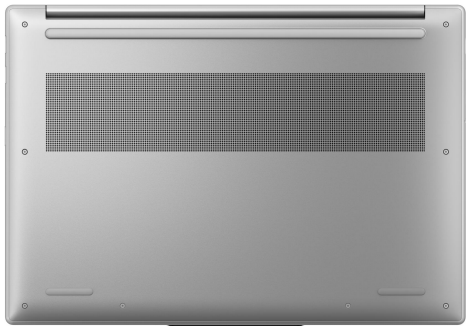

AMD