


**OVERVIEW**

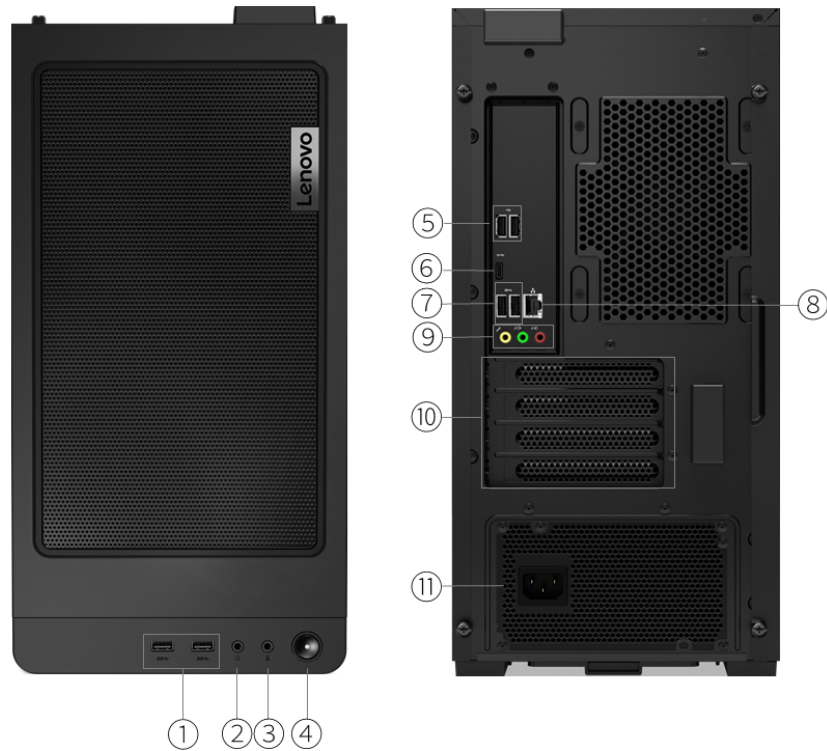

1. 2x USB 3.2 Gen 1	7. 2x USB 2.0
2. Headphone (3.5mm)	8. Ethernet (RJ-45)
3. Microphone (3.5mm)	9. 3x Audio line-out (3.5mm)
4. Power button	10. Optional ports on expansion cards
5. 2x USB 3.2 Gen 1	11. Power connector
6. USB-C 3.2 Gen 2	

## PERFORMANCE

### Processor

#### Processor Family

10th Generation Intel® Core™ i5 / i7 or 11th Generation Intel Core i5 / i7 / i9 Processor

#### Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i5-10400	6	12	2.9GHz	4.3GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i5-10400F	6	12	2.9GHz	4.3GHz	12MB	DDR4-2666	-
Core i5-11400	6	12	2.6GHz	4.4GHz	12MB	DDR4-3200	Intel UHD Graphics 730
Core i5-11400F	6	12	2.6GHz	4.4GHz	12MB	DDR4-3200	-
Core i5-11500	6	12	2.7GHz	4.6GHz	12MB	DDR4-3200	Intel UHD Graphics 750
Core i5-11600	6	12	2.8GHz	4.8GHz	12MB	DDR4-3200	Intel UHD Graphics 750
Core i7-10700	8	16	2.9GHz	4.8GHz	16MB	DDR4-2933	Intel UHD Graphics 630
Core i7-10700F	8	16	2.9GHz	4.8GHz	16MB	DDR4-2933	-
Core i7-11700	8	16	2.5GHz	4.9GHz	16MB	DDR4-3200	Intel UHD Graphics 750
Core i7-11700F	8	16	2.5GHz	4.9GHz	16MB	DDR4-3200	-
Core i9-11900	8	16	2.5GHz	5.2GHz	16MB	DDR4-3200	Intel UHD Graphics 750
Core i9-11900F	8	16	2.5GHz	5.2GHz	16MB	DDR4-3200	-

### Operating System

#### Operating System\*\*

- Windows® 10 Pro 64
- Windows 10 Home 64
- Windows 11 Pro 64
- Windows 11 Home 64
- No operating system

### Graphics

#### Graphics\*\*[1]

Graphics	Type	Memory	Connector	Max Resolution	Key Features	Remark
NVIDIA® GeForce® GTX 1650 SUPER	Discrete	4GB GDDR6	1x HDMI® 2.0b, 2x DP 1.4	7680x4320 @60Hz(DP), 4096x2160@60Hz(HDMI)	DirectX® 12	-
NVIDIA GeForce GTX 1660 SUPER	Discrete	6GB GDDR6	1x DVI, 1x HDMI 2.0b, 1x DP 1.4	4096x2160@60Hz(HDMI), 5120x3200@60Hz(DP), 2560x1660@60Hz(DVI)	DirectX 12	-
NVIDIA GeForce RTX™ 3060	Discrete	12G GDDR6	3x DP 1.4a, 1x HDMI 2.1	7680x4320@60Hz(HDMI), 7680x4320@60Hz(DP)	DirectX 12	-
NVIDIA GeForce RTX 3060 Ti	Discrete	8G GDDR6	3x DP 1.4a, 1x HDMI 2.1	7680x4320@60Hz(HDMI), 7680x4320@60Hz(DP)	DirectX 12	-
NVIDIA GeForce RTX 3070	Discrete	8G GDDR6	3x DP 1.4a, 1x HDMI 2.1	7680x4320@60Hz(HDMI); 7680x4320@60Hz(DP)	DirectX 12	-

#### Notes:

1. The information of integrated graphics are not applicable for the models without integrated graphics (for the details, please refer to processor section)

### Monitor Support

#### Monitor Support

Supports up to 4 independent displays via discrete graphics

## Chipset

### Chipset

Intel B560 chipset

## Memory

### Max Memory<sup>[1]</sup>

Up to 128GB DDR4-3200

### Memory Slots

Four DDR4 UDIMM slots, dual-channel capable

### Memory Type<sup>\*\*</sup>

- DDR4-3200
- DDR4-3200, Armor

### Memory Protection

Non-ECC

#### Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

## Storage

### Storage Support<sup>[1]</sup>

Up to five drives, 2x 3.5" HDD + 2x M.2 SSD + 1x open 2.5 HDD Bay

- 3.5" HDD up to 2TB each
- M.2 SSD up to 1TB each

### Storage Type<sup>\*\*\*</sup>

Disk Type	Interface	RPM
3.5" SATA HDD	SATA 6Gb/s	7.2K
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-
M.2 2280 SSD	PCIe NVMe, PCIe 4.0 x4	-

### RAID

No support

#### Notes:

1. 2.5" HDD bay is for customer self upgrade purpose and the hard drive is sold separately.

## Removable Storage

### Optical

None

### Card Reader

No card reader

## Multi-Media

### Audio Chip

High Definition (HD) Audio, Realtek® ALC887 codec

## Power Supply

### Power Supply<sup>\*\*</sup>

Power	Type	Efficiency	Key Features
350W	Fixed	85%	100V - 240V
550W	Fixed	88%	220V
650W	Fixed	90%	100V - 240V

## DESIGN

### Input Device

#### Keyboard

- Lenovo Calliope Keyboard (USB connector), black
- No keyboard

#### Mouse

- Lenovo Calliope Mouse (USB connector), black
- No mouse

### Mechanical

#### Form Factor

Tower (26L)

#### Dimensions (WxDxH)

Models	Dimensions
All models	205 x 396 x 411 mm (8.1 x 15.6 x 16.2 inches)

#### Weight

Models	Weight
All models	14 kg (30.86 lbs)

#### Case Color

Black

#### Chassis\*\*

- Normal side cover
- Transparent side cover
- Transparent side cover and inner decorate cover

#### Bays

- 1x 2.5" disk bay
- 2x 3.5" disk bay

#### Expansion Slots

- One PCIe 4.0 x16
- One PCIe 3.0 x4
- Three M.2 slots (one for WLAN, two for SSD)

#### Cooling System (Fan & Cooler)\*\*\*

- (Optional) 2x top system fan for airflow with ARGB, 2x front system fan with ARGB, 1x rear system fan for airflow with ARGB
- (Optional) 2x front system fan with ARGB, 1x rear system fan for airflow with ARGB
- (Optional) 1x front system fan, 1x rear system fan
- (Optional) 1x rear system fan with ARGB
- (Optional) 1x rear system fan
- (Optional) 65W basic cooler, 95W advance cooler, 150W premium cooler
- (Optional) M.2 SSD heatsink or M.2. SSD DECO MYLAR heatsink
- (Optional) CPU VRM heatsink
- (Optional) PCH heatsink

#### System Lighting\*\*\*

- (Optional) Internal ambient lighting
- Legion OY iconic LED

## CONNECTIVITY

### Network

#### Onboard Ethernet

Gigabit Ethernet, Realtek RTL8111H, 1x RJ45

#### WLAN + Bluetooth®

Wi-Fi® 6, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, M.2 Card

## Ports<sup>[1]</sup>

### Rear Ports<sup>[2]</sup>

- 2x USB 2.0
- 2x USB 3.2 Gen 1
- 1x USB-C 3.2 Gen 2 (support data transfer and 5V@3A charging)
- 3x audio out (5.1 channel)
- 1x Ethernet (RJ-45)
- 1x power connector

### Top Ports

- 2x USB 3.2 Gen 1
- 1x headphone (3.5mm)
- 1x microphone (3.5mm)

### Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.  
USB 2.0: 480 Mbit/s;  
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;  
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;  
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;  
Thunderbolt™ 3: 40 Gbit/s;  
FireWire 400: 400 Mbit/s;  
FireWire 800: 800 Mbit/s
2. For video ports on discrete graphics, please see graphics section

## SECURITY & PRIVACY

### Security

#### BIOS Security

- Administrator password
- Power-on password

## SERVICE

### Warranty

#### Base Warranty\*\*

- 1-year mail-in service
- 1-year depot service
- 1-year limited onsite service
- 2-year depot service
- 3-year depot service

## ENVIRONMENTAL

### Operating Environment

#### Temperature

Storage: -40°C (-40°F) to 60°C (140°F)

#### Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

#### Altitude

- Operating: -15.2 m (-50 ft) to 3048 m (10,000 ft)
- Storage: -15.2 m (-50 ft) to 12192 m (40,000 ft)

## CERTIFICATIONS

## Green Certifications

### Green Certifications

- ENERGY STAR® 8.0 (only available for MT 90RS)
- ErP Lot 3
- RoHS compliant

- Feature with \*\* means that only one offering listed under the feature is configured on selected models.
- Feature with \*\*\* means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



intel



intel



intel



intel



intel



intel