


**OVERVIEW**

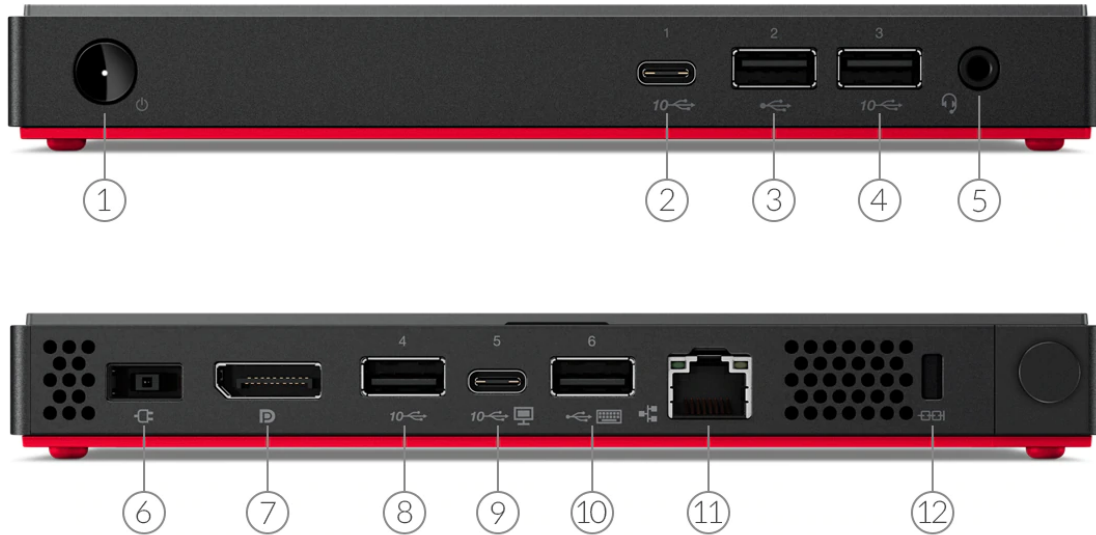

1. Power button	7. DisplayPort
2. USB-C 3.2 Gen 2	8. USB 3.2 Gen 2
3. USB 2.0	9. USB-C 3.2 Gen 2 (display and power-in)
4. USB 3.2 Gen 2	10. USB 2.0
5. Headphone / microphone combo jack (3.5mm)	11. Ethernet (RJ-45)
6. Power connector	

## PERFORMANCE

### Processor

#### Processor Family

AMD Ryzen™ 3 / 5 Processor

#### Processor

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
AMD Ryzen 3 PRO 3300U	4	4	2.1GHz	3.5GHz	2MB L2 / 4MB L3	DDR4-2400	AMD Radeon™ Vega 6 Graphics
AMD Ryzen 5 PRO 3500U	4	8	2.1GHz	3.7GHz	2MB L2 / 4MB L3	DDR4-2400	AMD Radeon Vega 8 Graphics

### Operating System

#### Operating System

- Windows® 10 Home 64
- Windows 10 Pro 64
- Windows 10 IoT Enterprise
- Ubuntu Linux
- No operating system

### Graphics

#### Graphics<sup>[1]</sup>

Graphics	Type	Memory	Connector	Max Resolution	Key Features
AMD Radeon Vega 6 Graphics	Integrated	Shared	1x DisplayPort™, 1x USB-C	3840x2160@60Hz(DP), 3840x2160@60Hz(USB-C)	DirectX® 12
AMD Radeon Vega 8 Graphics	Integrated	Shared	1x DisplayPort, 1x USB-C	3840x2160@60Hz(DP), 3840x2160@60Hz(USB-C)	DirectX 12

#### Notes:

1. The information of integrated graphics are not applicable for the models without integrated graphics (for the details, please refer to processor section)

### Monitor Support

#### Monitor Support

Supports up to 2 independent displays via onboard ports (DisplayPort and USB-C)

### Chipset

#### Chipset

AMD SoC (System on Chip) platform

### Memory

#### Max Memory<sup>[1]</sup>

8GB soldered memory, not upgradable

#### Memory Slots

Memory soldered to systemboard, no slots, dual-channel

#### Memory Type

DDR4-2400

#### Memory Protection

Non-ECC

#### Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

## Storage

### Storage Support

Up to two drives, 2x M.2 SSD

- M.2 SSD up to 1TB each

### Storage Type

Disk Type	Interface	RPM	Security
M.2 2242 SSD	PCIe NVMe, PCIe 3.0 x2	-	-
M.2 2242 SSD	PCIe NVMe, PCIe 3.0 x4	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	Opal

### RAID

No support

## Removable Storage

### Optical

None

### Card Reader

No card reader

## Multi-Media

### Audio Chip

High Definition (HD) Audio, Realtek® ALC233 codec

### Speakers

Single speaker, 1W x1

## Power Supply

### Power Supply

Power	Type	Efficiency	Key Features
65W	Adapter	89%	Autosensing
No power supply	-	-	-

## DESIGN

## Input Device

### Keyboard

- Lenovo Calliope Keyboard (USB connector), black
- Lenovo Calliope Wireless Keyboard (2.4GHz via USB receiver), black
- Lenovo Traditional Keyboard (USB connector), black
- No keyboard

### Mouse

- Lenovo Calliope Mouse (USB connector), black
- Lenovo Calliope Wireless Mouse (2.4GHz via USB receiver), black
- Lenovo Fingerprint Mouse (USB connector), Windows Hello support, black
- No mouse

## Mechanical

### Form Factor

Nano (0.35L)

### Dimensions (WxDxH)

179 x 88 x 22 mm (7.05 x 3.46 x 0.87 inches)

### Weight

0.505 kg (1.11 lbs)

**Case Color**

Iron grey (top cover), black (mid bezel), red (bottom cover)

**Bays**

No bays

**Expansion Slots**

- One M.2 slot (for WLAN)
- Two M.2 slots (for SSD, one supports up to PCIe 3.0 x4, one supports up to PCIe 3.0 x2)

**Stand**

No stand

**IO Box**

No IO box

**Mounting**

- VESA mount bracket kit with adapter holder, supports VESA mount 75mm and 100mm
- VESA mount bracket kit, supports VESA mount 75mm and 100mm
- DIN rail mount bracket kit
- None

## CONNECTIVITY

### Network

**Onboard Ethernet**

Gigabit Ethernet, Realtek RTL8111FP-CG, 1x RJ45, supports Wake-on-LAN

**Optional Ethernet**

No optional Ethernet

**WLAN + Bluetooth®**

- Realtek RTL8852AE, Wi-Fi® 6, 802.11ax Dual Band 2x2 Wi-Fi + Bluetooth 5.2, M.2 card
- Realtek RTL8822CE, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 5.0, M.2 card
- Qualcomm® QCA6174A, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 4.2, M.2 card
- Intel® Wireless-AC 9260, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 5.0, M.2 card
- No WLAN and Bluetooth

### Ports<sup>[1]</sup>

**Front Ports**

- 1x USB 2.0
- 1x USB 3.2 Gen 2
- 1x USB-C 3.2 Gen 2
- 1x headphone / microphone combo jack (3.5mm)

**Rear Ports<sup>[2]</sup>**

- 1x USB 2.0
- 1x USB 3.2 Gen 2
- 1x USB-C 3.2 Gen 2 (support display function and power-in [20V and >45W])
- 1x DisplayPort
- 1x Ethernet (RJ-45)

**Notes:**

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.  
USB 2.0: 480 Mbit/s;  
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;  
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;  
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;  
Thunderbolt™ 3: 40 Gbit/s;  
FireWire 400: 400 Mbit/s;  
FireWire 800: 800 Mbit/s
2. For video ports on discrete graphics, please see graphics section

### Monitor Cable

**Monitor Cable**

- USB-C to DP dongle
- USB-C to HDMI® dongle
- USB-C to VGA dongle
- DP to HDMI 1.4 dongle
- DP to VGA dongle
- No monitor cable

**SECURITY & PRIVACY****Security****Security Chip**

Discrete TPM 2.0, TCG certified

**Physical Locks**

Kensington® Security Slot

**Chassis Intrusion Switch**

Chassis intrusion switch

**Fingerprint Reader**

- Touch style fingerprint reader on mouse
- No fingerprint reader

**BIOS Security**

- Administrator password
- Power-on password
- Hard disk password
- Boot sequence control
- Boot without keyboard and mouse
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- Individual USB port disablement

**MANAGEABILITY****System Management****System Management**

DASH 1.1 / 1.2

**SERVICE****Warranty****Base Warranty**

- 1-year depot service
- 1-year limited onsite service
- 3-year limited onsite service
- No base warranty

**ENVIRONMENTAL****Operating Environment****Temperature**

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

**Humidity**

- Operating: 20% to 80%
- Storage: 10% to 90%

**Altitude**

- Operating: -15.2 m (-50 ft) to 3048 m (10,000 ft)
- Storage: -15.2 m (-50 ft) to 12192 m (40,000 ft)

## CERTIFICATIONS

### Green Certifications

#### Green Certifications

- EPEAT™ Silver
- ENERGY STAR® 8.0
- ErP Lot 3
- TCO Certified 8.0
- RoHS compliant
- REACH
- WEEE

### Other Certifications

#### Other Certifications

TÜV Rheinland® Ultra Low Noise

#### Mil-Spec Test

MIL-STD-810H military test passed (Low Pressure [Altitude], High Temperature, Low Temperature, Temperature Shock, Humidity, Sand and Dust, Vibration, Shock, Fungus, Solar Radiation)



AMD



AMD



AMD



AMD



AMD



AMD