


**OVERVIEW**

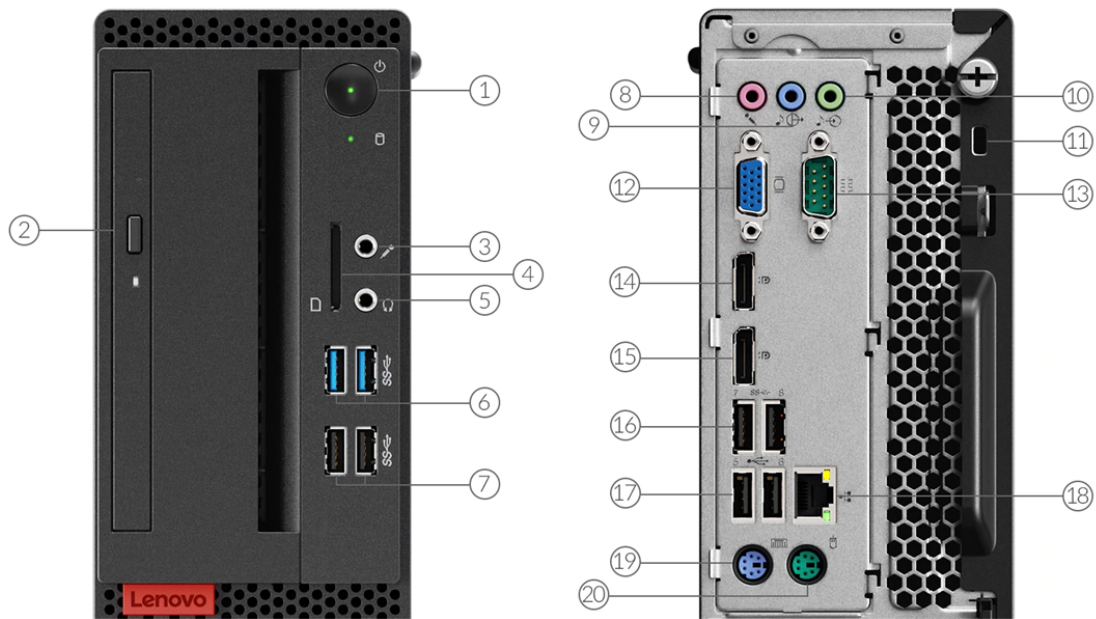

1. Power button	11. Kensington Security Slot
2. Optical drive *	12. VGA
3. Headphone (3.5mm)	13. Serial
4. Card reader *	14. DisplayPort
5. Microphone (3.5mm)	15. DisplayPort
6. 2x USB 3.1 Gen 2	16. 2x USB 3.1 Gen 1
7. 2x USB 3.1 Gen 1	17. 2x USB 2.0
8. Microphone (3.5mm)	18. Ethernet (RJ-45)
9. Audio line-out (3.5mm)	19. PS/2 port (keyboard)
10. Audio line-in (3.5mm)	20. PS/2 port (mouse)

Notes:

- Ports with \* are only available on selected models

## PERFORMANCE

### Processor

#### Processor Family

AMD Athlon™ or AMD Ryzen™ 3 / 5 Processor

#### Processor

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
AMD Athlon 300GE	2	4	3.4GHz	-	1MB L2 / 4MB L3	DDR4-2666	AMD Radeon™ Vega 3 Graphics
AMD Athlon PRO 200GE	2	4	3.2GHz	-	1MB L2 / 4MB L3	DDR4-2666	AMD Radeon Vega 3 Graphics
AMD Athlon PRO 300GE	2	4	3.4GHz	-	1MB L2 / 4MB L3	DDR4-2666	AMD Radeon Vega 3 Graphics
AMD Ryzen 3 3200G	4	4	3.6GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon Vega 8 Graphics
AMD Ryzen 3 PRO 2200G	4	4	3.5GHz	3.7GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon Vega 8 Graphics
AMD Ryzen 3 PRO 3200G	4	4	3.6GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon Vega 8 Graphics
AMD Ryzen 5 2400G	4	8	3.6GHz	3.9GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon RX Vega 11 Graphics
AMD Ryzen 5 3350G	4	8	3.6GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon RX Vega 11 Graphics
AMD Ryzen 5 3400G	4	8	3.7GHz	4.2GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon RX Vega 11 Graphics
AMD Ryzen 5 PRO 3350G	4	8	3.6GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon Vega 11 Graphics
AMD Ryzen 5 PRO 3400G	4	8	3.7GHz	4.2GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon Vega 11 Graphics
AMD Ryzen 5 PRO 3600	6	12	3.6GHz	4.2GHz	3MB L2 / 32MB L3	DDR4-3200	-
AMD Ryzen 7 PRO 3700	8	16	3.6GHz	4.4GHz	4MB L2 / 32MB L3	DDR4-3200	-
AMD Ryzen 9 PRO 3900	12	24	3.1GHz	4.3GHz	6MB L2 / 64MB L3	DDR4-3200	-

### Operating System

#### Operating System

- Windows® 10 Home 64
- Windows 10 Pro 64
- Windows 10 IoT Enterprise
- Ubuntu Linux
- No operating system

### Graphics

#### Graphics<sup>[1]</sup>

Graphics	Type	Memory	Connector	Max Resolution	Key Features
AMD Radeon R5 Graphics	Integrated	Shared	2x DisplayPort™, 1x VGA	4096x2160@60Hz(DP), 1920x1200@60Hz(VGA)	DirectX® 12
AMD Radeon R7 Graphics	Integrated	Shared	2x DisplayPort, 1x VGA	4096x2160@60Hz(DP), 1920x1200@60Hz(VGA)	DirectX 12

AMD Radeon Vega 3 Graphics	Integrated	Shared	2x DisplayPort, 1x VGA	4096x2160@60Hz(DP), 1920x1200@60Hz(VGA)	DirectX 12
AMD Radeon Vega 8 Graphics	Integrated	Shared	2x DisplayPort, 1x VGA	4096x2160@60Hz(DP), 1920x1200@60Hz(VGA)	DirectX 12
AMD Radeon Vega 11 Graphics	Integrated	Shared	2x DisplayPort, 1x VGA	4096x2160@60Hz(DP), 1920x1200@60Hz(VGA)	DirectX 12
AMD Radeon RX Vega 11 Graphics	Integrated	Shared	2x DisplayPort, 1x VGA	4096x2160@60Hz(DP), 1920x1200@60Hz(VGA)	DirectX 12
AMD Radeon 520	Discrete	2GB GDDR5	2x DP 1.2	4096x2160@60Hz(DP)	DirectX 12

**Notes:**

- The information of integrated graphics are not applicable for the models without integrated graphics (for the details, please refer to processor section)

## Monitor Support

**Monitor Support<sup>[1]</sup>**

Supports up to 3 independent displays via onboard ports (VGA and 2x DisplayPort), more displays support via discrete graphics

**Notes:**

- Onboard video ports are only available for the models with integrated graphics

## Chipset

**Chipset**

AMD PRO 560 chipset

## Memory

**Max Memory<sup>[1]</sup>**

Up to 128GB DDR4-2666

**Memory Slots**

Four DDR4 DIMM slots, dual-channel capable

**Memory Type**

- DDR4-1866
- DDR4-2133
- DDR4-2400
- DDR4-2666

**Memory Protection**

Non-ECC

**Notes:**

- The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

## Storage

**Storage Support**

Up to three drives, 1x 2.5"/3.5" HDD + 1x 2.5" HDD + 1x M.2 SSD

- 2.5" HDD up to 1TB each
- 3.5" HDD up to 2TB
- M.2 SSD up to 1TB

**Storage Type**

Disk Type	Interface	RPM	Security
2.5" SATA HDD	SATA 6Gb/s	7.2K	-
3.5" SATA HDD	SATA 6Gb/s	7.2K	-
M.2 2242 SSD	PCIe NVMe, PCIe 3.0 x2	-	-

M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	Opal
--------------	------------------------	---	------

**RAID**

RAID 0/1 support for HDDs (RAID preset only available via special bid model)

**Removable Storage****Optical**

- DVD-ROM, SATA 1.5Gb/s, slim (9.0mm)
- DVD burner (DVD±RW), SATA 1.5Gb/s, slim (9.0mm)
- None

**Card Reader**

- 7-in-1 card reader
- No card reader

**Multi-Media****Audio Chip**

High Definition (HD) Audio, Realtek® ALC662 codec

**Speakers**

- Single speaker, 1W x1
- No speakers

**Power Supply****Power Supply**

Power	Type	Efficiency	Key Features
180W	Fixed	85%	-
210W	Fixed	85%	-
260W	Fixed	92%	-

**DESIGN****Input Device****Keyboard**

- Lenovo Calliope Wireless Keyboard (2.4GHz via USB receiver), black
- Lenovo Keyboard (PS/2 connector), black
- Lenovo Traditional Keyboard (USB connector), black
- No keyboard

**Mouse**

- Lenovo Calliope Mouse (USB connector), black
- Lenovo Calliope Wireless Mouse (2.4GHz via USB receiver), black
- Lenovo Mouse (PS/2 connector), black (only available via special bid)
- Lenovo Fingerprint Mouse (USB connector), Windows Hello support, black
- No mouse

**Mechanical****Form Factor**

SFF (8.4L)

**Dimensions (WxDxH)**

92.5 x 290.5 x 343.5 mm (3.6 x 11.4 x 13.5 inches)

**Weight**

6.0 kg (13.2 lbs)

**Case Color**

Black

**Bays**

- 1x 2.5" disk bay (bay comes with disk)

# ThinkCentre M75s

- 1x 3.5" disk bay
- 1x slim ODD bay

## Expansion Slots

- One PCIe 3.0 x1, low-profile (length < 150mm, height < 68mm)
- One PCIe 3.0 x16, low-profile (length < 150mm, height < 68mm)
- Two dummy slots, only brackets for optional port extension
- Two M.2 slots (one for WLAN, one for SSD)

## EOU

Toolless cover, disk, optical, extension card assembly / removal

## Stand

- Vertical stand
- No stand

## Others

(Optional) Dust filter

# CONNECTIVITY

## Network

### Onboard Ethernet

Gigabit Ethernet, Realtek RTL8111EPV, 1x RJ45, supports Wake-on-LAN

### Optional Ethernet

No optional Ethernet

### WLAN + Bluetooth®

- Realtek RTL8822CE, 802.11ac Dual Band 2x2 Wi-Fi® + Bluetooth 5.0, M.2 card
- Qualcomm® QCA6174A, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 4.2, M.2 card
- Intel® Wireless-AC 9260, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 5.0, M.2 card
- No WLAN and Bluetooth

## Ports<sup>[1]</sup>

### Front Ports

- 2x USB 3.1 Gen 1
- 2x USB 3.1 Gen 2
- 1x headphone (3.5mm)
- 1x microphone (3.5mm)

### Optional Front Ports

- 1x card reader
- None

### Rear Ports<sup>[2]</sup>

- 2x USB 2.0
- 2x USB 3.1 Gen 1
- 1x VGA
- 2x DisplayPort
- 1x serial (9-pin)
- 2x PS/2 ports (keyboard / mouse)
- 1x Ethernet (RJ-45)
- 1x line-in (3.5mm)
- 1x line-out (3.5mm)
- 1x microphone (3.5mm)

### Optional Rear Ports

- 2x USB 2.0 (via 2-port adapter)
- 1x serial
- 1x parallel

## Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.  
USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;  
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;  
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;  
Thunderbolt™ 3: 40 Gbit/s;  
FireWire 400: 400 Mbit/s;  
FireWire 800: 800 Mbit/s

2. For video ports on discrete graphics, please see graphics section

## Monitor Cable

### Monitor Cable

- DP to dual DP dongle
- DP to DVI-D dongle
- DP to HDMI® 1.4 dongle
- DP to VGA cable (1.5M)
- DP to VGA dongle
- No monitor cable

## SECURITY & PRIVACY

### Security

#### Security Chip

Discrete TPM 2.0, TCG certified

#### Physical Locks

- (Optional) Smart Cable Clip
- Kensington® Security Slot
- Padlock Loop

#### Chassis Intrusion Switch

- Chassis intrusion switch
- No chassis intrusion switch

#### Fingerprint Reader

- Touch style fingerprint reader on mouse
- No fingerprint reader

#### BIOS Security

- Administrator password
- Power-on password
- Hard disk password
- Boot sequence control
- Boot without keyboard and mouse
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- Individual USB port disablement

## MANAGEABILITY

### System Management

#### System Management

DASH 1.0 / 1.1

## SERVICE

### Warranty

#### Base Warranty

- 1-year depot service
- 1-year limited onsite service
- 3-year limited onsite service
- No base warranty

## ENVIRONMENTAL

## Operating Environment

### Temperature

- Storage: -40°C (-40°F) to 60°C (140°F)
- Operating: 5°C (41°F) to 35°C (95°F)

### Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

### Altitude

- Operating: -15.2 m (-50 ft) to 3048 m (10,000 ft)
- Storage: -15.2 m (-50 ft) to 12192 m (40,000 ft)

## CERTIFICATIONS

### Green Certifications

#### Green Certifications

- ErP Lot 3
- RoHS compliant
- WEEE

