


OVERVIEW

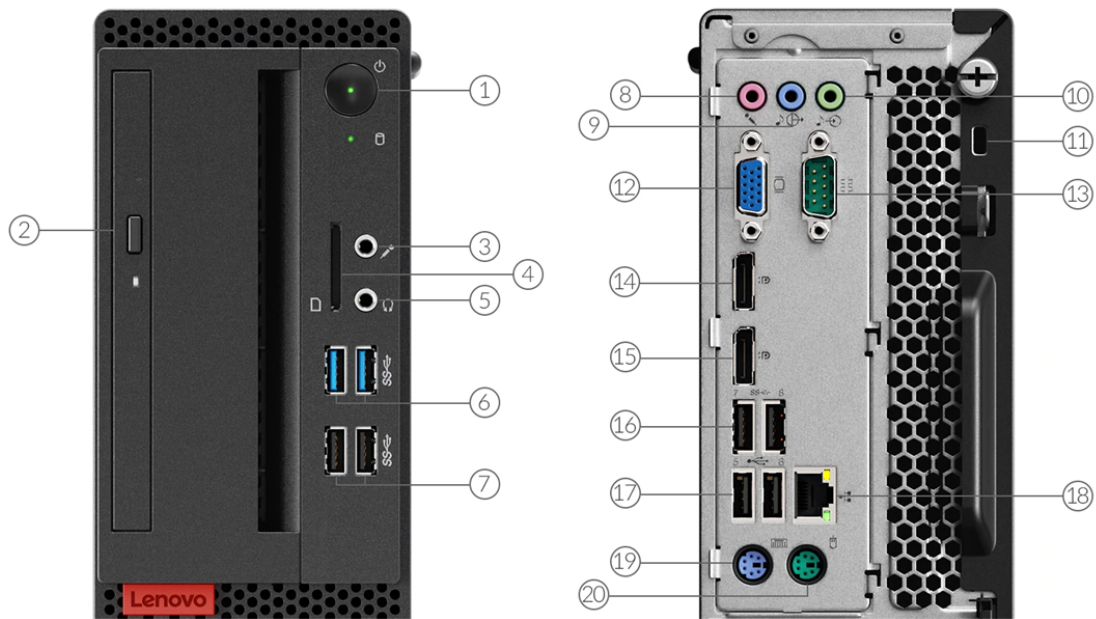

1. Power button	11. Kensington Security Slot
2. Optical drive *	12. VGA
3. Headphone (3.5mm)	13. Serial
4. Card reader *	14. DisplayPort
5. Microphone (3.5mm)	15. DisplayPort
6. 2x USB 3.1 Gen 2	16. 2x USB 3.1 Gen 1
7. 2x USB 3.1 Gen 1	17. 2x USB 2.0
8. Microphone (3.5mm)	18. Ethernet (RJ-45)
9. Audio line-out (3.5mm)	19. PS/2 port (keyboard)
10. Audio line-in (3.5mm)	20. PS/2 port (mouse)

Notes:

- Ports with * are only available on selected models

PERFORMANCE

Processor

Processor Family

AMD Athlon™ or AMD Ryzen™ 3 / 5 Processor

Processor

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
AMD Athlon 300GE	2	4	3.4GHz	-	1MB L2 / 4MB L3	DDR4-2666	AMD Radeon™ Vega 3 Graphics
AMD Athlon PRO 200GE	2	4	3.2GHz	-	1MB L2 / 4MB L3	DDR4-2666	AMD Radeon Vega 3 Graphics
AMD Athlon PRO 300GE	2	4	3.4GHz	-	1MB L2 / 4MB L3	DDR4-2666	AMD Radeon Vega 3 Graphics
AMD Ryzen 3 3200G	4	4	3.6GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon Vega 8 Graphics
AMD Ryzen 3 PRO 2200G	4	4	3.5GHz	3.7GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon Vega 8 Graphics
AMD Ryzen 3 PRO 3200G	4	4	3.6GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon Vega 8 Graphics
AMD Ryzen 5 2400G	4	8	3.6GHz	3.9GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon RX Vega 11 Graphics
AMD Ryzen 5 3350G	4	8	3.6GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon RX Vega 11 Graphics
AMD Ryzen 5 3400G	4	8	3.7GHz	4.2GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon RX Vega 11 Graphics
AMD Ryzen 5 PRO 3350G	4	8	3.6GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon Vega 11 Graphics
AMD Ryzen 5 PRO 3400G	4	8	3.7GHz	4.2GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon Vega 11 Graphics
AMD Ryzen 5 PRO 3600	6	12	3.6GHz	4.2GHz	3MB L2 / 32MB L3	DDR4-3200	-
AMD Ryzen 7 PRO 3700	8	16	3.6GHz	4.4GHz	4MB L2 / 32MB L3	DDR4-3200	-
AMD Ryzen 9 PRO 3900	12	24	3.1GHz	4.3GHz	6MB L2 / 64MB L3	DDR4-3200	-

Operating System

Operating System

- Windows® 10 Home 64
- Windows 10 Pro 64
- Windows 10 IoT Enterprise
- Ubuntu Linux
- No operating system

Graphics

Graphics^[1]

Graphics	Type	Memory	Connector	Max Resolution	Key Features
AMD Radeon R5 Graphics	Integrated	Shared	2x DisplayPort™, 1x VGA	4096x2160@60Hz(DP), 1920x1200@60Hz(VGA)	DirectX® 12
AMD Radeon R7 Graphics	Integrated	Shared	2x DisplayPort, 1x VGA	4096x2160@60Hz(DP), 1920x1200@60Hz(VGA)	DirectX 12

AMD Radeon Vega 3 Graphics	Integrated	Shared	2x DisplayPort, 1x VGA	4096x2160@60Hz(DP), 1920x1200@60Hz(VGA)	DirectX 12
AMD Radeon Vega 8 Graphics	Integrated	Shared	2x DisplayPort, 1x VGA	4096x2160@60Hz(DP), 1920x1200@60Hz(VGA)	DirectX 12
AMD Radeon Vega 11 Graphics	Integrated	Shared	2x DisplayPort, 1x VGA	4096x2160@60Hz(DP), 1920x1200@60Hz(VGA)	DirectX 12
AMD Radeon RX Vega 11 Graphics	Integrated	Shared	2x DisplayPort, 1x VGA	4096x2160@60Hz(DP), 1920x1200@60Hz(VGA)	DirectX 12
AMD Radeon 520	Discrete	2GB GDDR5	2x DP 1.2	4096x2160@60Hz(DP)	DirectX 12

Notes:

- The information of integrated graphics are not applicable for the models without integrated graphics (for the details, please refer to processor section)

Monitor Support

Monitor Support^[1]

Supports up to 3 independent displays via onboard ports (1x VGA +2x DisplayPort), more displays support via discrete graphics

Notes:

- Onboard video ports are only available for the models with integrated graphics

Chipset

Chipset

AMD PRO 560 chipset

Memory

Memory Type

- DDR4-1866
- DDR4-2133
- DDR4-2400
- DDR4-2666

Memory Slots

Four DDR4 DIMM slots, dual-channel capable

Memory Protection

Non-ECC

Max Memory^[1]

Up to 128GB DDR4-2666

Notes:

- The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support

Up to three drives, 1x 2.5"/3.5" HDD + 1x 2.5" HDD + 1x M.2 2242/2280 SSD

- 2.5" HDD up to 1TB each
- 3.5" HDD up to 2TB
- M.2 SSD up to 1TB

RAID

RAID 0/1 support for HDDs (RAID preset only available via special bid model)

Storage Type

Disk Type	Interface	RPM	Security
3.5" SATA HDD	SATA 6Gb/s	7.2K	-

2.5" SATA HDD	SATA 6Gb/s	7.2K	-
M.2 2242 SSD	PCIe NVMe, PCIe 3.0 x2	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	Opal

Removable Storage

Optical

- DVD-ROM, SATA 1.5Gb/s, slim (9.0mm)
- DVD burner (DVD±RW), SATA 1.5Gb/s, slim (9.0mm)
- None

Card Reader

- 7-in-1 card reader
- No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC662 codec

Speakers

- Single speaker, 1W x1
- No speakers

Power Supply

Power Supply

Power	Type	Efficiency	Key Features
180W	Fixed	85%	-
210W	Fixed	85%	-
260W	Fixed	92%	-

DESIGN

Input Device

Keyboard

- Lenovo Calliope Wireless Keyboard (2.4GHz via USB receiver), black
- Lenovo Keyboard (PS/2 connector), black
- Lenovo Traditional Keyboard (USB connector), black
- No keyboard

Mouse

- Lenovo Calliope Wireless Mouse (2.4GHz via USB receiver), black
- Lenovo Calliope Mouse (USB connector), black
- Lenovo Fingerprint Mouse (USB connector), Windows Hello support, black
- No mouse
- Lenovo Mouse (PS/2 connector), black (only available via special bid)

Mechanical

Form Factor

SFF (8.4L)

Dimensions (WxDxH)

92.5 x 290.5 x 343.5 mm (3.6 x 11.4 x 13.5 inches)

Weight

6.0 kg (13.2 lbs)

Case Color

Black

Bays

- 1x slim ODD bay

ThinkCentre M75s

- 1x 2.5" disk bay (bay comes with disk)
- 1x 3.5" disk bay

Expansion Slots

- One PCIe 3.0 x16, low-profile (length < 150mm, height < 68mm)
- One PCIe 3.0 x1, low-profile (length < 150mm, height < 68mm)
- Two dummy slots, only bracket for optional port extension
- Two M.2 slots (one for WLAN, one for SSD)

EOU

Toolless cover, disk, optical, extension card assembly / removal

Stand

- Vertical stand
- No stand

Others

(Optional) Dust Filter

CONNECTIVITY

Network

Onboard Ethernet

Gigabit Ethernet, Realtek RTL8111EPV, 1x RJ45, supports Wake-on-LAN

Optional Ethernet

No optional Ethernet

WLAN + Bluetooth™

- Realtek RTL8822CE, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 5.0, M.2 card
- Qualcomm® QCA6174A, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 4.2, M.2 card
- Intel® Wireless-AC 9260, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 5.0, M.2 card
- No WLAN and Bluetooth

Ports^[1]

Front Ports

- 2x USB 3.1 Gen 1
- 2x USB 3.1 Gen 2
- 1x microphone (3.5mm)
- 1x headphone (3.5mm)

Optional Front Ports

- 1x card reader
- None

Rear Ports^[2]

- 2x USB 2.0
- 2x USB 3.1 Gen 1
- 1x serial (9-pin)
- 2x PS/2 ports (keyboard/mouse)
- 1x Ethernet (RJ-45)
- 1x VGA
- 1x microphone (3.5mm)
- 1x line-in (3.5mm)
- 1x line-out (3.5mm)
- 2x DisplayPort

Optional Rear Ports

- 2x USB 2.0 (Via 2-port adapter)
- 1x serial
- 1x parallel

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt™ 3: 40 Gbit/s;
FireWire 400: 400 Mbit/s;
FireWire 800: 800 Mbit/s

2. For video ports on discrete graphics, please see graphics section

Monitor Cable

Monitor Cable

- DP to VGA dongle
- DP to dual DP dongle
- DP to DVI-D dongle
- DP to HDMI® 1.4 dongle
- DP to VGA Cable (1.5M)
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

- Kensington® Security Slot
- Padlock Loop
- (Optional) Smart Cable Clip

Chassis Intrusion Switch

- Chassis intrusion switch
- No chassis intrusion switch

Fingerprint Reader

- Touch style fingerprint reader on mouse
- No fingerprint reader

BIOS Security

- Power-on password
- Administrator password
- Hard disk password
- Boot sequence control
- Boot without keyboard and mouse
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- Individual USB port disablement

MANAGEABILITY

System Management

System Management

DASH 1.0/1.1

SERVICE

Warranty

Base Warranty

- 1-year depot service
- 1-year limited onsite service
- 3-year limited onsite service
- No base warranty

ENVIRONMENTAL

Operating Environment

Temperature

- Storage without packaging: -10°C (14°F) to 60°C (140°F)
- Operating: 10°C (50°F) to 35°C (95°F)
- Storage in original shipping packaging: -40°C (-40°F) to 60°C (140°F)

Humidity

- Storage: 20% to 90% (non-condensing)
- Operating: 20% to 80% (non-condensing)

Altitude

- Operating: -15.2 m (-50 ft) to 3048 m (10,000 ft)
- Storage: -15.2 m (-50 ft) to 10668 m (35,000 ft)

CERTIFICATIONS

Green Certifications

Green Certifications

- ErP Lot 3
- RoHS compliant
- WEEE

