


## OVERVIEW

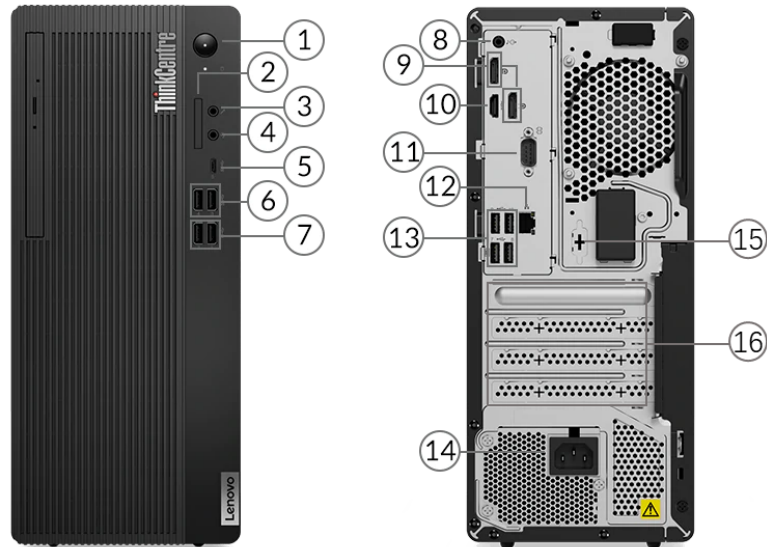

1. Power button	9. 2x DisplayPort 1.4
2. Card reader *	10. HDMI 1.4b
3. Microphone jack (3.5mm)	11. Serial
4. Headphone / microphone combo jack (3.5mm)	12. Ethernet (RJ-45)
5. USB-C 3.2 Gen 1	13. 4x USB 2.0
6. 2x USB 3.2 Gen 1	14. Power connector
7. 2x USB 3.2 Gen 2	15. Serial *
8. Line-out (3.5mm)	16. Optional ports on expansion cards *

Notes:

- Items with \* are only available on selected models

## PERFORMANCE

### Processor

#### Processor Family

AMD Athlon™ or AMD Ryzen™ 3 / 5 / 7 / 9 Processor

#### Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
AMD Athlon™ Gold PRO 3150G <sup>[1]</sup>	4	4	3.5GHz	3.9GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon™ Graphics
AMD Athlon™ Silver 3050GE <sup>[2]</sup>	2	4	3.4GHz	3.4GHz	1MB L2 / 4MB L3	DDR4-2666	AMD Radeon™ Graphics
AMD Ryzen™ 3 3200G <sup>[3]</sup>	4	4	3.6GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon™ Vega 8 Graphics
AMD Ryzen™ 3 4300G <sup>[4]</sup>	4	8	3.8GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 3 5300G	4	8	4.0GHz	4.2GHz	2MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 3 PRO 4350G <sup>[5]</sup>	4	8	3.8GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 3 PRO 5350G	4	8	4.0GHz	4.2GHz	2MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 3 PRO 5355G	4	8	4.0GHz	4.2GHz	2MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 5 4600G <sup>[6]</sup>	6	12	3.7GHz	4.2GHz	3MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 5 5600G	6	12	3.9GHz	4.4GHz	3MB L2 / 16MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 5 PRO 3350G <sup>[7]</sup>	4	8	3.6GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon™ Vega 11 Graphics
AMD Ryzen™ 5 PRO 3400G <sup>[8]</sup>	4	8	3.7GHz	4.2GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon™ Vega 11 Graphics
AMD Ryzen™ 5 PRO 3600 <sup>[9]</sup>	6	12	3.6GHz	4.2GHz	3MB L2 / 32MB L3	DDR4-3200	-
AMD Ryzen™ 5 PRO 4650G <sup>[10]</sup>	6	12	3.7GHz	4.2GHz	3MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 5 PRO 5650G	6	12	3.9GHz	4.4GHz	3MB L2 / 16MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 5 PRO 5655G	6	12	3.9GHz	4.4GHz	3MB L2 / 16MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 7 4700G <sup>[11]</sup>	8	16	3.6GHz	4.4GHz	4MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 7 5700G	8	16	3.8GHz	4.6GHz	4MB L2 / 16MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 7 PRO 3700 <sup>[12]</sup>	8	16	3.6GHz	4.4GHz	4MB L2 / 32MB L3	DDR4-3200	-
AMD Ryzen™ 7 PRO 4750G <sup>[13]</sup>	8	16	3.6GHz	4.4GHz	4MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 7 PRO 5750G	8	16	3.8GHz	4.6GHz	4MB L2 / 16MB L3	DDR4 3200	AMD Radeon™ Graphics
AMD Ryzen™ 7 PRO 5755G	8	16	3.8GHz	4.6GHz	4MB L2 / 16MB L3	DDR4 3200	AMD Radeon™ Graphics

AMD Ryzen™ 9 PRO 3900 <sup>[14]</sup>	12	24	3.1GHz	4.3GHz	6MB L2 / 64MB L3	DDR4-3200	-
---------------------------------------	----	----	--------	--------	------------------	-----------	---

## Notes:

[1], [2], [3], [4], [5], [6], [7], [8], [9], [10], [11], [12], [13], [14] End of life and not available any more.

## Operating System

### Operating System\*\*

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Windows® 11 DG Windows® 10 Pro 64
- Windows® 10 Pro 64
- Windows® 10 Home 64
- Windows® 10 Home 64 Single Language
- Windows® 10 IoT Enterprise
- Ubuntu Linux<sup>[1]</sup>
- No preload operating system

## Notes:

[1] Some features may not be supported on the system with Linux preload, including but not limited to Intel® RST RAID, Human Presence Detection, etc.

## Graphics

### Graphics\*\*<sup>[1][2]</sup>

Graphics	Type	Memory	Max Resolution	Connector	Key Features
AMD Radeon™ Graphics	Integrated	Shared	4096x2160@60Hz(DP), 4096x2160@24Hz(HDMI®)	2x DisplayPort™ 1.4, 1x HDMI® 1.4	DirectX® 12
AMD Radeon™ Vega 8 Graphics	Integrated	Shared	4096x2160@60Hz(DP), 4096x2160@24Hz(HDMI®)	2x DisplayPort™ 1.4, 1x HDMI® 1.4	DirectX® 12
AMD Radeon™ Vega 11 Graphics	Integrated	Shared	4096x2160@60Hz(DP), 4096x2160@24Hz(HDMI®)	2x DisplayPort™ 1.4, 1x HDMI® 1.4	DirectX® 12
AMD Radeon™ 520	Discrete	2GB GDDR5	4096x2160@60Hz(DP)	2x DP 1.2	DirectX® 12
AMD Radeon™ RX 550X	Discrete	4GB GDDR5	4096x2160@60Hz(HDMI®), 2048x1536@85Hz(VGA), 3840x2160@60Hz(DP)	1x HDMI® 2.0, 1x VGA, 1x DP 1.4	DirectX® 12
AMD Radeon™ RX 6400	Discrete	4GB GDDR6	7680x4320@60Hz(HDMI®), 7680x4320@60Hz(DP)	1x HDMI® 2.1 FRL, 1x DP 1.4a	DirectX® 12, OpenGL 4.6

## Notes:

[1] The information of integrated graphics are not applicable for the models with processor which has no integrated graphics inside (for the details, please refer to processor section).

[2] AMD Radeon™ 520 is not available for MT 11RB / 11RC / 11RD / 11RE.

## Monitor Support

### Monitor Support

Supports up to 3 independent displays via onboard ports (HDMI® and 2x DisplayPort™), more displays support via discrete graphics

## Chipset

### Chipset

AMD PRO 565 chipset

## Memory<sup>[1]</sup>

### Max Memory<sup>[2]</sup>

Up to 128GB DDR4-3200

### Memory Slots

Four DDR4 DIMM slots, dual-channel capable

### Memory Type\*\*

- DDR4-1866<sup>[3]</sup>
- DDR4-2133<sup>[4]</sup>
- DDR4-2400<sup>[5]</sup>
- DDR4-2666<sup>[6]</sup>
- DDR4-3200

Notes:

[1] Recommend to choose the models with more than 4GB for better performance and experience.

[2] The max memory is based on the test results with current Lenovo® memory offerings.

[3] Installed memory is actually DDR4-3200 but may run as DDR4-1866 depending on the memory support capability of processor.

[4] Installed memory is actually DDR4-3200 but may run as DDR4-2133 depending on the memory support capability of processor.

[5] Installed memory is actually DDR4-3200 but may run as DDR4-2400 depending on the memory support capability of processor.

[6] Installed memory is actually DDR4-3200 but may run as DDR4-2666 depending on the memory support capability of processor.

## Storage

### Storage Support<sup>[1]</sup>

Up to three drives, 1x 2.5"/3.5" HDD + 1x 2.5" HDD + 1x M.2 SSD

- 2.5" HDD up to 1TB each
- 3.5" HDD up to 2TB
- M.2 SSD up to 2TB

### Storage Type\*\*\*

Disk Type	Interface	RPM	Security
2.5" SATA HDD	SATA 6Gb/s	7.2K	-
3.5" SATA HDD	SATA 6Gb/s	7.2K	-
M.2 2242 SSD	PCIe® NVMe®, PCIe® 3.0 x2	-	-
M.2 2242 SSD	PCIe® NVMe®, PCIe® 3.0 x4	-	-
M.2 2280 SSD	PCIe® NVMe®, PCIe® 3.0 x4	-	Opal
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4 Value	-	Opal

### RAID

RAID 0/1 support for HDDs (RAID preset only available via special bid models)

Notes:

[1] The max capacity of each disk type is based on the test results with current Lenovo® storage offerings.

## Removable Storage

### Optical\*\*

- DVD-ROM, SATA 1.5Gb/s, slim (9.0mm)
- DVD burner (DVD±RW), SATA 1.5Gb/s, slim (9.0mm)
- None

### Card Reader

- 3-in-1 card reader (SD, SDHC, SDXC)
- No card reader

## Multi-Media

### Audio Chip

High Definition (HD) Audio, Realtek® ALC623-CG codec

### Speakers

- No speakers
- Single speaker, 2W x1

## Power Supply

### Power Supply\*\*

Power	Type	Efficiency	Key Features
180W	Fixed	85%	-
260W	Fixed	85%	100-240V, 50-60Hz
310W	Fixed	92%	100-240V, 50-60Hz

## DESIGN

### Input Device

#### Keyboard\*\*

- Lenovo® Calliope Keyboard (USB connector), black
- Lenovo® Calliope Wireless Keyboard (2.4GHz via USB receiver), black
- Lenovo® Traditional Keyboard (USB connector), black
- No keyboard

#### Mouse\*\*

- Lenovo® Calliope Mouse (USB connector), black
- Lenovo® Calliope Wireless Mouse (2.4GHz via USB receiver), black
- Lenovo® Fingerprint Mouse (USB connector), Windows® Hello support, black (EOL on Jan, 2023)
- No mouse

### Mechanical

#### Form Factor

Tower (13.6L)

#### Dimensions (WxDxH)<sup>[1]</sup>

145 x 296 x 346 mm (5.7 x 11.7 x 13.6 inches)

#### Weight<sup>[2]</sup>

Around 5.9 kg (13 lbs)

#### Case Color

Black

#### Bays

- 1x 2.5" disk bay (bay comes with disk)
- 1x 3.5" disk bay
- 1x slim ODD bay

#### Expansion Slots

- One PCIe® 3.0 x16, full-height (length < 215mm)
- One PCIe® 3.0 x1, full-height (length < 215mm)
- Two M.2 slots (one for WLAN, one for SSD)
- Two dummy slots, only brackets for optional port extension

#### EOU

EOU design for chassis open, M.2 SSD, ODD, memory, and PCIe® extension card<sup>[3]</sup>

#### Others

- (Optional) Dust filter
- Supports Smart Power On

#### Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

[3] To comply with UL 4200A, the toolless features are not available for the following countries:

Argentina, Belize, Bolivia, Canada, Caribbean Group, Chile, Colombia, Costa Rica, Dominican Republic, Ecuador, El Salvador, Guatemala, Honduras, Mexico, Nicaragua, Panama, Paraguay, Peru, TAA, Uruguay, USA, Venezuela.

## CONNECTIVITY

### Network<sup>[1]</sup>

#### WLAN + Bluetooth<sup>®\*\*</sup>

- Realtek<sup>®</sup> RTL8822CE, Wi-Fi<sup>®</sup> 5, 802.11ac Dual Band 2x2 Wi-Fi<sup>®</sup> + Bluetooth<sup>®</sup> 5.0, M.2 card
- Intel<sup>®</sup> Wireless-AC 9260, Wi-Fi<sup>®</sup> 5, 802.11ac Dual Band 2x2 Wi-Fi<sup>®</sup> + Bluetooth<sup>®</sup> 5.0, M.2 card
- MediaTek Wi-Fi<sup>®</sup> 6 MT7921, 802.11ax 2x2 Wi-Fi<sup>®</sup> + Bluetooth<sup>®</sup> 5.1, M.2 Card<sup>[2]</sup>
- Realtek<sup>®</sup> Wi-Fi<sup>®</sup> 6 RTL8852AE, 802.11ax Dual Band 2x2 Wi-Fi<sup>®</sup> + Bluetooth<sup>®</sup> 5.1, M.2 card<sup>[3]</sup>
- Intel<sup>®</sup> Wi-Fi<sup>®</sup> 6 AX200, 802.11ax 2x2 Wi-Fi<sup>®</sup> + Bluetooth<sup>®</sup> 5.1, M.2 card<sup>[4]</sup>
- No WLAN and Bluetooth<sup>®</sup>

#### Onboard Ethernet<sup>\*\*</sup>

- Gigabit Ethernet, Realtek<sup>®</sup> RTL8111EPV, 1x RJ-45, supports Wake-on-LAN
- Gigabit Ethernet, Realtek<sup>®</sup> RTL8111HN, 1x RJ-45, supports Wake-on-LAN

#### Optional Ethernet<sup>\*\*[5]</sup>

- Gigabit Ethernet, Bitland BN8E88, 1x RJ-45, PCIe<sup>®</sup> x1
- Gigabit Ethernet, Bitland RTL8111FP, 1x RJ-45, PCIe<sup>®</sup> x1
- No optional Ethernet

#### Notes:

[1] This system does not support Power Over Ethernet (PoE). If the system is used in a PoE environment, then a Network Isolator is required to prevent possible damage to the system, PoE equipment, or both.

[2], [3], [4] Bluetooth<sup>®</sup> 5.2 is hardware ready but may run at a lower version due to OS limitations.

[5] RTL8111FP is not available for AP countries.

### Ports<sup>[1]</sup>

#### Front Ports

- 1x USB-C<sup>®</sup> 3.2 Gen 1
- 2x USB 3.2 Gen 1
- 2x USB 3.2 Gen 2
- 1x headphone / microphone combo jack (3.5mm)
- 1x microphone (3.5mm)

#### Optional Front Ports

- 1x card reader
- None

#### Rear Ports<sup>[2]</sup>

- 4x USB 2.0
- 1x HDMI<sup>®</sup> 1.4b
- 2x DisplayPort<sup>™</sup> 1.4
- 1x Ethernet (RJ-45)
- 1x line-out (3.5mm)
- 1x serial (9-pin)

#### Optional Rear Ports<sup>\*\*\*</sup>

- 2x USB-C<sup>®</sup> 3.2 Gen 2 (support data transfer, via 2-port USB-C<sup>®</sup> expansion card, PCIe<sup>®</sup> x4)
- 2x USB 3.2 Gen 1 (via 2-port USB expansion card, PCIe<sup>®</sup> x1)
- 2x USB 2.0 (via 2-port adapter)
- 1x parallel
- 1x serial
- None

#### Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;  
USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;  
USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;  
Thunderbolt™ 3/4: 40 Gbit/s.

[2] For video ports on discrete graphics, please see graphics section.

## SECURITY & PRIVACY

### Security

#### Security Chip

Discrete TPM 2.0, TCG certified

#### Physical Locks

- (Optional) E-lock
- (Optional) Smart Cable Clip
- Kensington® Security Slot™, 3 x 7 mm
- Padlock Loop

#### Chassis Intrusion Switch

- Chassis intrusion switch
- No chassis intrusion switch

#### Fingerprint Reader

- Touch style fingerprint reader on mouse (EOL on Jan, 2023)
- No fingerprint reader

#### BIOS Security

- Administrator password
- Hard disk password
- Power-on password
- Boot sequence control
- Boot without keyboard and mouse
- Individual USB port disablement
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- More BIOS security features, please visit [BIOS Simulator](#)<sup>[1]</sup>

Notes:

[1] The BIOS simulator is just for reference. Default settings and some options may vary depending on the hardware, operating system and BIOS version.

## MANAGEABILITY

### System Management

#### System Management<sup>[1]</sup>

- DASH 1.2
- Non-DASH

Notes:

[1] DASH 1.2 is an optional feature for the selected MTs, MT 11W5/11W6/11W7/11W8 do not support DASH.

## SERVICE

### Warranty<sup>[1]</sup>

#### Base Warranty\*\*

- 1-year courier or carry-in service
- 1-year limited onsite service
- 3-year limited onsite service
- No base warranty

Notes:

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://support.lenovo.com/warrantylookup/warrantypolicy>.

## ACCESSORIES

### Bundled Accessories

#### Bundled Accessories\*\*\*

- DP to DVI dongle
- DP to Dual DP dongle
- DP to HDMI® dongle
- DP to VGA cable (1.5m)
- DP to VGA dongle
- HDMI® to DVI dongle
- HDMI® to HDMI® cable (1.5m)
- HDMI® to VGA dongle
- None

## OPERATING REQUIREMENTS

### Operating Environment

#### Temperature

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

#### Relative Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

#### Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

## CERTIFICATIONS

### Green Certifications<sup>[1]</sup>

#### Green Certifications<sup>[2]</sup>

- (Optional) ENERGY STAR® 8.0
- (Optional) EPEAT™ Silver Registered<sup>[3]</sup>
- (Optional) EPEAT™ Gold Registered<sup>[4]</sup>
- ErP Lot 3
- RoHS compliant
- TCO Certified 8.0

#### Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2] ENERGY STAR® 8.0 and EPEAT™ are only available for MT 11KB/11KC.

[3], [4] EPEAT™ is registered where applicable, please visit [epeat.net](https://epeat.net) for registration status by country.

### Other Certifications

#### Other Certifications

- (Optional) TÜV Rheinland® Low Noise
- (Optional) TÜV Rheinland® Ultra Low Noise

#### Mil-Spec Test

MIL-STD-810H military test passed (Low Pressure [Altitude], High Temperature, Low Temperature, Temperature Shock, Humidity, Sand and Dust, Vibration, Shock, Fungus, Solar Radiation)

- Feature with \*\* means that only one option listed under the feature can be configured on selected models.



Please refer to the model configuration for specific information.

- Feature with \*\*\* means that one or more options listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.




AMD



AMD



AMD

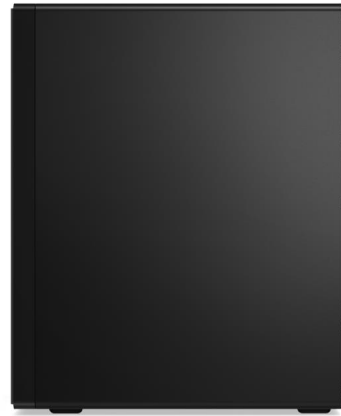

AMD



AMD



AMD