

PERFORMANCE

Processor

Processor Family

AMD Athlon™ or AMD Ryzen™ 3 / 5 / 7 / 9 processor

Processor

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
AMD Athlon Silver 3050GE	2	4	3.4GHz	3.4GHz	1MB L2 / 4MB L3	DDR4-2666	AMD Radeon™ Graphics
AMD Athlon Gold PRO 3150G	4	4	3.5GHz	3.9GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon Graphics
AMD Ryzen 3 3200G	4	4	3.6GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon Vega 8 Graphics
AMD Ryzen 3 4300G	4	8	3.8GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-3200	AMD Radeon Graphics
AMD Ryzen 3 PRO 4350G	4	8	3.8GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-3200	AMD Radeon Graphics
AMD Ryzen 5 4600G	6	12	3.7GHz	4.2GHz	3MB L2 / 8MB L3	DDR4-3200	AMD Radeon Graphics
AMD Ryzen 5 PRO 3350G	4	8	3.6GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon Vega 11 Graphics
AMD Ryzen 5 PRO 3400G	4	8	3.7GHz	4.2GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon Vega 11 Graphics
AMD Ryzen 5 PRO 3600	6	12	3.6GHz	4.2GHz	3MB L2 / 32MB L3	DDR4-3200	-
AMD Ryzen 5 PRO 4650G	6	12	3.7GHz	4.2GHz	3MB L2 / 8MB L3	DDR4-3200	AMD Radeon Graphics
AMD Ryzen 7 4700G	8	16	3.6GHz	4.4GHz	4MB L2 / 8MB L3	DDR4-3200	AMD Radeon Graphics
AMD Ryzen 7 PRO 3700	8	16	3.6GHz	4.4GHz	4MB L2 / 32MB L3	DDR4-3200	-
AMD Ryzen 7 PRO 4750G	8	16	3.6GHz	4.4GHz	4MB L2 / 8MB L3	DDR4-3200	AMD Radeon Graphics
AMD Ryzen 9 PRO 3900	12	24	3.1GHz	4.3GHz	6MB L2 / 64MB L3	DDR4-3200	-

Operating System

- Windows® 10 Home 64
- Windows 10 Pro 64
- Windows 10 IoT Enterprise
- Ubuntu Linux
- No operating system

Graphics

Graphics	Type	Memory	Connector	Max Resolution	Key Features
AMD Radeon Vega 8 Graphics	Integrated	Shared	2x DisplayPort™ 1.4, 1x HDMI® 1.4	4096x2160@60Hz(DP), 4096x2160@24Hz(HDMI)	DirectX® 12
AMD Radeon Vega 11 Graphics	Integrated	Shared	2x DisplayPort 1.4, 1x HDMI 1.4	4096x2160@60Hz(DP), 4096x2160@24Hz(HDMI)	DirectX 12
AMD Radeon 520	Discrete	2GB GDDR5	2x DP 1.2	4096x2160@60Hz(DP)	DirectX 12

AMD Radeon Graphics	Integrated	Shared	2x DisplayPort 1.4, 1x HDMI 1.4	4096x2160@60Hz(DP), 4096x2160@24Hz(HDMI)	DirectX 12
AMD Radeon RX 550X	Discrete	4GB GDDR5	1x HDMI 2.0, 1x VGA, 1x DP 1.4	4096x2160@60Hz(HDMI), 2048x1536@85Hz(VGA), 3840x2160@60Hz(DP)	DirectX 12

Notes:

- Integrated graphics information and onboard video ports information are not applicable for all models without integrated graphics (for the details, please refer to processor section)

Monitor Support

Supports up to 3 independent displays via onboard ports (1x HDMI + 2x DisplayPort), more displays support via discrete graphics

Chipset

AMD PRO 565 chipset

Memory**Memory Type**

- DDR4-1866
- DDR4-2133
- DDR4-2400
- DDR4-2666
- DDR4-3200

Memory Slots

Four DDR4 DIMM slots, dual-channel capable

Memory Protection

Non-ECC

Max Memory

Up to 128GB DDR4-3200

Notes:

- The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage**Storage Support**

Up to three drives, 1x 2.5"/3.5" HDD + 1x 2.5" HDD + 1x M.2 2242/2280 SSD

- 2.5" HDD up to 1TB each
- 3.5" HDD up to 2TB
- M.2 SSD up to 2TB

Storage Type

Disk Type	Interface	RPM	Security
2.5" SATA HDD	SATA 6Gb/s	7.2K	-
3.5" SATA HDD	SATA 6Gb/s	7.2K	-
M.2 2242 SSD	PCIe NVMe, PCIe 3.0 x2	-	-
M.2 2242 SSD	PCIe NVMe, PCIe 3.0 x4	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	Opal

Removable Storage**Optical**

- DVD-ROM, SATA 1.5Gb/s, slim (9.0mm)
- DVD burner (DVD±RW), SATA 1.5Gb/s, slim (9.0mm)
- Not configured

Card Reader

ThinkCentre M75t Gen 2

- 3-in-1 card reader (SD, SDHC, SDXC)
- Not configured

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC623-CG codec

Speakers

- Single speaker, 2W x1
- Not configured

Power Supply

Power	Type	Efficiency	Key Features
180W	Fixed	85%	-
260W	Fixed	85%	-
310W	Fixed	92%	-

DESIGN

Input Device

Keyboard

- Lenovo Calliope Keyboard (USB connector), black
- Lenovo Calliope Wireless Keyboard (2.4GHz via USB receiver), black
- Lenovo Traditional Keyboard (USB connector), black
- Not configured

Mouse

- Lenovo Calliope Wireless Mouse (2.4GHz via USB receiver), black
- Lenovo Calliope Mouse (USB connector), black
- Lenovo Fingerprint Mouse (USB connector), Windows Hello support, black
- Not configured

Mechanical

Form Factor

Tower (13.6L)

Dimensions (WxDxH)

WxDxH:145 x 296 x 346 mm (5.7 x 11.7 x 13.6 inches)

Weight

4.8 kg (10.6 lbs)

Case Color

Black

Bays

- 1x slim ODD bay
- 1x 2.5" disk bay (bay comes with disk)
- 1x 3.5" disk bay

Expansion Slots

- One PCIe 3.0 x16, full-height (length < 215mm)
- One PCIe 3.0 x1, full-height (length < 215mm)
- Two M.2 slots (one for WLAN, one for SSD)

EOU

EOU design for HDD

CONNECTIVITY

Network

ThinkCentre M75t Gen 2

Onboard Ethernet

Gigabit Ethernet, Realtek RTL8111EPV, 1x RJ45, supports Wake-on-LAN

Optional Ethernet

- Gigabit Ethernet, Bitland BN8E88, 1x RJ-45, PCIe x1
- Gigabit Ethernet, Bitland RTL8111FP, 1x RJ-45, PCIe x1
- Not configured

Notes:

- RTL8111FP is not available for AP countries

WLAN + Bluetooth™

- Realtek RTL8822CE, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 5.0, M.2 card
- Realtek RTL8852AE, 802.11ax Dual Band 2x2 Wi-Fi + Bluetooth 5.2, M.2 card
- Intel® Wireless-AC 9260, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 5.0, M.2 card
- Intel Wi-Fi 6 AX200, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, M.2 card
- Not configured

Ports

Front Ports

- 2x USB 3.2 Gen 1
- 2x USB 3.2 Gen 2
- 1x USB-C 3.2 Gen 1
- 1x headphone / microphone combo jack (3.5mm)
- 1x microphone (3.5mm)

Notes:

- The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

Thunderbolt™ 3: 40 Gbit/s;

FireWire 400: 400 Mbit/s;

FireWire 800: 800 Mbit/s;

Optional Front Ports

- 1x card reader
- None

Rear Ports

- 4x USB 2.0
- 1x serial (9-pin)
- 1x Ethernet (RJ-45)
- 1x HDMI
- 1x line-out (3.5mm)
- 2x DisplayPort

Notes:

- For video ports on discrete graphics, please see graphics section

Optional Rear Ports

- 2x USB 3.2 Gen 1 (via 2-port USB expansion card, PCIe x1)
- 2x USB-C 3.2 Gen 2 (via 2-port USB-C expansion card, PCIe x4)
- 1x serial
- 1x parallel
- None

Monitor Cable

- DP to VGA dongle
- DP to dual DP dongle
- HDMI to HDMI Cable (1.5m)

- HDMI to VGA Dongle
- DP to DVI-D dongle
- DP to HDMI 1.4 dongle
- DP to VGA Cable (1.5M)
- Not configured

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

- (Optional) E-lock
- Kensington® Security Slot
- (Optional) Smart Cable Clip

Chassis Intrusion Switch

- Chassis intrusion switch
- Not configured

Fingerprint Reader

- Touch style fingerprint reader on mouse
- Not configured

BIOS Security

- Power-on password
- Administrator password
- Hard disk password
- Boot sequence control
- Boot without keyboard and mouse
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- Individual USB port disablement

MANAGEABILITY

System Management

DASH 1.1

SERVICE

Warranty

Base Warranty

- 1-year depot service
- 1-year limited onsite service
- 3-year limited onsite service
- No base warranty

CERTIFICATIONS

Green Certifications

- (Optional) EPEAT™ Gold
- (Optional) EPEAT Silver
- (Optional) ENERGY STAR® 8.0
- ErP Lot 3
- TCO Certified 8.0
- RoHS

Notes:

- ENERGY STAR 8.0 and EPEAT are only available for MT 11KB/11KC

Other Certifications

- (Optional) TÜV Low Noise certified
- (Optional) TÜV Ultra Low Noise certified
- None




AMD




AMD



AMD

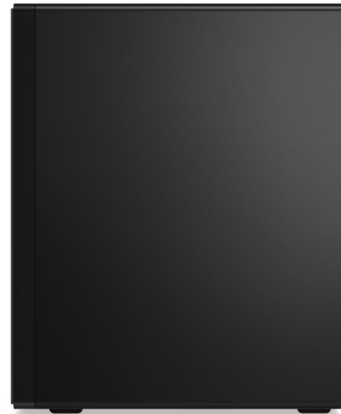

AMD

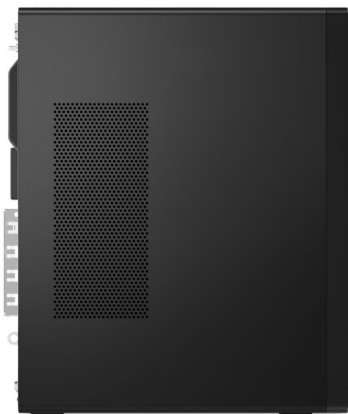

AMD



AMD