


**OVERVIEW**

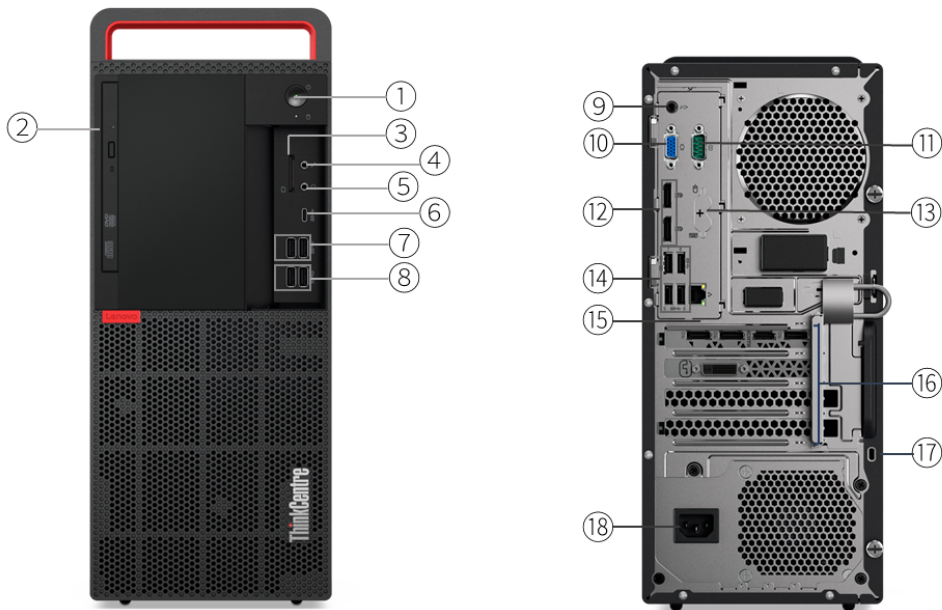

1. Power button	10. VGA
2. Optical drive *	11. Serial
3. Card reader *	12. 2x DisplayPort
4. Microphone (3.5mm)	13. 2x PS/2 ports (keyboard / mouse) *
5. Headphone / microphone combo jack (3.5mm)	14. 4x USB 3.1 Gen 1
6. USB-C 3.1 Gen 1	15. Ethernet (RJ-45)
7. 2x USB 3.1 Gen 1	16. Optional ports on expansion cards *
8. 2x USB 3.1 Gen 2	17. Kensington Security Slot
9. Line-out (3.5mm)	18. Power connector

Notes:

- Ports with \* are only available on selected models

## PERFORMANCE

### Processor

#### Processor Family

Intel® Celeron®, Intel Pentium®, 8th Generation Intel Core™ i3 / i5 / i7, or 9th Generation Intel Core i3 / i5 / i7 / i9 Processor

#### Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Celeron G4900	2	2	3.1GHz	-	2MB	DDR4-2400	Intel UHD Graphics 610
Celeron G4920	2	2	3.2GHz	-	2MB	DDR4-2400	Intel UHD Graphics 610
Celeron G4930	2	2	3.2GHz	-	2MB	DDR4-2400	Intel UHD Graphics 610
Celeron G4950	2	2	3.3GHz	-	2MB	DDR4-2400	Intel UHD Graphics 610
Pentium Gold G5400	2	4	3.7GHz	-	4MB	DDR4-2400	Intel UHD Graphics 610
Pentium Gold G5420	2	4	3.8GHz	-	4MB	DDR4-2400	Intel UHD Graphics 610
Pentium Gold G5500	2	4	3.8GHz	-	4MB	DDR4-2400	Intel UHD Graphics 630
Pentium Gold G5600	2	4	3.9GHz	-	4MB	DDR4-2400	Intel UHD Graphics 630
Pentium Gold G5620	2	4	4.0GHz	-	4MB	DDR4-2400	Intel UHD Graphics 630
Core i3-8100	4	4	3.6GHz	-	6MB	DDR4-2400	Intel UHD Graphics 630
Core i3-8300	4	4	3.7GHz	-	8MB	DDR4-2400	Intel UHD Graphics 630
Core i3-9100	4	4	3.6GHz	4.2GHz	6MB	DDR4-2400	Intel UHD Graphics 630
Core i3-9100F	4	4	3.6GHz	4.2GHz	6MB	DDR4-2400	-
Core i3-9300	4	4	3.7GHz	4.3GHz	8MB	DDR4-2400	Intel UHD Graphics 630
Core i3-9320	4	4	3.7GHz	4.4GHz	8MB	DDR4-2400	Intel UHD Graphics 630
Core i5-8400	6	6	2.8GHz	4.0GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i5-8500	6	6	3.0GHz	4.1GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i5-8600	6	6	3.1GHz	4.3GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i5-9400	6	6	2.9GHz	4.1GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i5-9400F	6	6	2.9GHz	4.1GHz	9MB	DDR4-2666	-
Core i5-9500	6	6	3.0GHz	4.4GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i5-9500F	6	6	3.0GHz	4.4GHz	9MB	DDR4-2666	-
Core i5-9600	6	6	3.1GHz	4.6GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i7-8700	6	12	3.2GHz	4.6GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i7-9700	8	8	3.0GHz	4.7GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i9-9900	8	16	3.1GHz	5.0GHz	16MB	DDR4-2666	Intel UHD Graphics 630

### Operating System

#### Operating System\*\*

- Windows® 10 Pro 64
- Windows 10 Home 64
- Ubuntu Linux
- No operating system

### Graphics

#### Graphics\*\*\*[1]

Graphics	Type	Memory	Connector	Max Resolution	Key Features
Intel UHD graphics 610	Integrated	Shared	1x VGA, 2x DP	2048x1536@50Hz(VGA), 4096x2304@60Hz(DP)	DirectX® 12
Intel UHD	Integrated	Shared	1x VGA, 2x DP	2048x1536@50Hz(VGA),	DirectX 12

graphics 630				4096x2304@60Hz(DP)	
AMD Radeon™ 520	Discrete	2GB GDDR5	2x DP 1.2	4096x2160@60Hz(DP)	DirectX 12
AMD Radeon RX 550X	Discrete	4GB GDDR5	1x HDMI® 2.0, 1x VGA, 1x DP 1.4	4096x2160@60Hz(HDMI), 2048x1536@85Hz(VGA), 3840x2160@60Hz(DP)	DirectX 12
NVIDIA® GeForce® GT 730	Discrete	2GB GDDR5	2x DP	3840x2160@60Hz(DP)	DirectX 12, PCIe® 2.0 x16, 35 watts
NVIDIA GeForce GTX 1060	Discrete	6GB GDDR5	1x HDMI, 3x DP, 1x DVI-D	4096x2160@60Hz(HDMI), 5120x3200@60Hz(DP), 2560x1600@60Hz(DVI-D)	DirectX 12, PCIe 3.0 x16, 120 watts, occupies two slots

Notes:

1. The information of integrated graphics are not applicable for the models without integrated graphics (for the details, please refer to processor section)

## Monitor Support

### Monitor Support<sup>[1]</sup>

Supports up to 3 independent displays via onboard ports (VGA and 2x DisplayPort™), more displays support via discrete graphics

Notes:

1. Onboard video ports are only available for the models with integrated graphics

## Chipset

### Chipset

Intel Q370 chipset

## Memory

### Max Memory<sup>[1]</sup>

Up to 64GB DDR4-2666

### Memory Slots

Four DDR4 DIMM slots, dual-channel capable

### Memory Type

DDR4-2666

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

## Storage

### Storage Support

Up to four drives, 2x 2.5"/3.5" HDD/SSD + 1x 2.5" HDD + 1x M.2 SSD

- 2.5" HDD up to 1TB each
- 3.5" HDD up to 2TB each
- 2.5" SSD up to 256GB each
- M.2 SSD up to 1TB
- Optional Intel Optane™ Memory, M.2

### Storage Type<sup>\*\*\*</sup>

Disk Type	Interface	RPM	Security
2.5" SATA SSD	SATA 6Gb/s	-	-
2.5" SATA SSD	SATA 6Gb/s	-	Opal
2.5" SATA HDD	SATA 6Gb/s	7.2K	-
3.5" SATA HDD	SATA 6Gb/s	7.2K	-

# ThinkCentre M920 Tower

M.2 2242 SSD	PCIe NVMe®, PCIe 3.0 x2	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	Opal
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	-
Intel Optane Memory M10	PCIe NVMe, PCIe 3.0 x2	-	-

## RAID

RAID 0/1 support for HDDs (RAID preset only available via special bid model)

## Removable Storage

### Optical\*\*

- DVD-ROM, SATA 1.5Gb/s, slim (9.0mm)
- DVD burner (DVD±RW), SATA 1.5Gb/s, slim (9.0mm)

### Card Reader

- 7-in-1 card reader (SD, SDHC, SDXC, MMC, MS, MS-Pro, XD)
- No card reader

## Multi-Media

### Audio Chip

High Definition (HD) Audio, Realtek® ALC233VB2 codec

### Speakers

Single speaker, 2W x1

## Power Supply

### Power Supply\*\*

Power	Type	Efficiency	Key Features
180W	Fixed	85%	100V - 240V
250W	Fixed	85%	100V - 240V
400W	Fixed	92%	100V - 240V

## DESIGN

## Input Device

### Keyboard\*\*

- Lenovo Calliope Wireless Keyboard (2.4GHz via USB receiver), black
- Lenovo Keyboard (PS/2 connector), black
- Lenovo Traditional Keyboard (USB connector), black
- No keyboard

### Mouse\*\*

- Lenovo Calliope Mouse (USB connector), black
- Lenovo Calliope Wireless Mouse (2.4GHz via USB receiver), black
- Lenovo Mouse (PS/2 connector), black (only available via special bid)
- Lenovo Fingerprint Mouse (USB connector), Windows Hello support, black
- No mouse

## Mechanical

### Form Factor

Tower (18L)

### Dimensions (WxDxH)

Models	Dimensions
All models	165 x 321.35 x 410.25 mm (6.5 x 12.65 x 16.15 inches)

### Weight

Models	Weight
--------	--------

All models	7 kg (15.45 lbs)
------------	------------------

**Case Color**

Black

**Bays**

- 1x 2.5" disk bay (optional, or bay comes with disk)
- 1x 3.5" disk bay
- 1x 3.5" disk bay (optional, or bay comes with disk)
- 1x slim ODD bay
- 1x 5.25" ODD / optional front access HDD

**Expansion Slots**

- One PCIe 3.0 x1, full-length (< 268mm) full-height (< 112mm)
- One PCIe 3.0 x16 (x4 signal), full-length (< 268mm) full-height (< 112mm)
- One PCIe 3.0 x16, full-length (< 268mm) full-height (< 112mm)
- One dummy slot, only bracket for optional port extension

**EOU**

Toolless cover, disk, optical, extension card assembly / removal

**Others**

- (Optional) Carry handle
- (Optional) Dust filter
- (Optional) Front access HDD

## CONNECTIVITY

### Network

**Onboard Ethernet**

Gigabit Ethernet, Intel Ethernet Connection I219-LM, 1x RJ45, supports Wake-on-LAN

**Optional Ethernet\*\***

- Gigabit Ethernet, Bitland BN8E88, 1x RJ-45, PCIe x1
- Gigabit Ethernet, Intel Ethernet Server Adapter I350-T4, 4x RJ-45, PCIe x4
- No optional Ethernet

**WLAN + Bluetooth®\*\***

- Realtek RTL8822BE, 802.11ac Dual Band 2x2 Wi-Fi® + Bluetooth 4.2, M.2 card
- Realtek RTL8821CE, 802.11ac Dual Band 1x1 Wi-Fi + Bluetooth 4.2, M.2 card
- Intel Dual Band Wireless-AC 3165, 802.11ac Dual Band 1x1 Wi-Fi + Bluetooth 4.2, M.2 Card
- Intel Dual Band Wireless-AC 8265, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 4.2, M.2 Card
- Intel Wireless-AC 9560, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 5.0, Intel vPro technology support, M.2 card
- No WLAN and Bluetooth

### Ports<sup>[1]</sup>

**Front Ports**

- 2x USB 3.1 Gen 1
- 2x USB 3.1 Gen 2
- 1x USB-C 3.1 Gen 1
- 1x headphone / microphone combo jack (3.5mm)
- 1x microphone (3.5mm)

**Optional Front Ports**

- 1x card reader
- None

**Rear Ports<sup>[2]</sup>**

- 4x USB 3.1 Gen 1
- 1x VGA
- 2x DisplayPort
- 1x serial (9-pin)
- 1x Ethernet (RJ-45)
- 1x line-out (3.5mm)

**Optional Rear Ports\*\*\***

- 2x USB 2.0 (via 2-port adapter)
- 2x USB 3.1 Gen 1 (via 2-port USB expansion card, PCIe x1)
- 2x USB-C 3.1 Gen 2 (via 2-port USB-C expansion card, PCIe x4)
- 1x Thunderbolt™ 3 (combo USB-C 3.1 Gen 2 / DisplayPort, via Thunderbolt expansion card, PCIe x4)
- 1x serial
- 4x serial (via 4-port serial expansion card, PCIe x1)
- 1x parallel
- 2x PS/2

---

**Notes:**

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.  
USB 2.0: 480 Mbit/s;  
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;  
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;  
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;  
Thunderbolt 3: 40 Gbit/s;  
FireWire 400: 400 Mbit/s;  
FireWire 800: 800 Mbit/s
2. For video ports on discrete graphics, please see graphics section

## Monitor Cable

### Monitor Cable\*\*\*

- DP to dual DP dongle
- DP to DVI-D dongle
- DP to HDMI 1.4 dongle
- DP to VGA cable (1.5M)
- DP to VGA dongle
- No monitor cable

## SECURITY & PRIVACY

### Security

#### Security Chip

Discrete TPM 2.0, TCG certified

#### Physical Locks

- (Optional) E-lock
- (Optional) Smart Cable Clip
- Kensington® Security Slot
- Padlock Loop

#### Chassis Intrusion Switch

- Chassis intrusion switch
- No chassis intrusion switch

#### Fingerprint Reader

- Touch style fingerprint reader on mouse
- No fingerprint reader

#### BIOS Security

- Administrator password
- Power-on password
- Hard disk password
- Boot sequence control
- Boot without keyboard and mouse
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- Individual USB port disablement

## MANAGEABILITY

### System Management

#### System Management<sup>[1]</sup>

- Intel vPro with Intel AMT 12.0
- None

---

**Notes:**

1. Require choosing a vPro-support Wi-Fi adapter to enable vPro function through wireless connection

## SERVICE

### Warranty

**Base Warranty\*\***

- 1-year depot service
- 1-year limited onsite service
- 3-year depot service
- 3-year limited onsite service
- 3-year split limited onsite service

## ENVIRONMENTAL

### Operating Environment

**Temperature**

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

**Humidity**

- Operating: 20% to 80%
- Storage: 10% to 90%

**Altitude**

- Operating: -15.2 m (-50 ft) to 3048 m (10,000 ft)
- Storage: -15.2 m (-50 ft) to 12192 m (40,000 ft)

## CERTIFICATIONS

### Green Certifications

**Green Certifications**

- EPEAT™ Silver
- ENERGY STAR® 8.0 (only available for MT 10U0/10U1 models with i3/i5/i7/i9 processor)
- ErP Lot 3
- TCO
- RoHS compliant

### Other Certifications

**Other Certifications**

(Optional) TÜV Rheinland® Low Noise

- Feature with \*\* means that only one offering listed under the feature is configured on selected models.
- Feature with \*\*\* means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow

disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.

- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



