


OVERVIEW

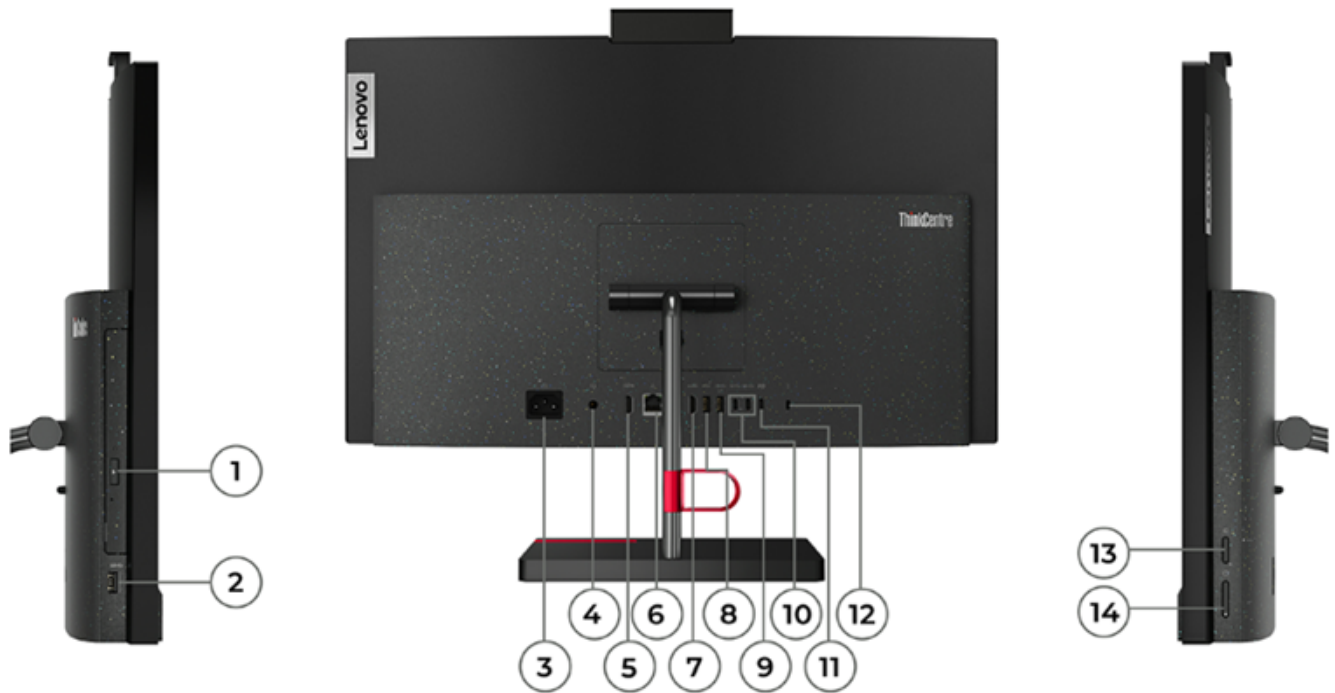

1. Optical drive eject button *	8. USB 2.0
2. USB 3.2 Gen 1	9. USB 3.2 Gen 2
3. Power connector	10. 2x USB-C 3.2 Gen 2
4. Headphone / microphone combo jack (3.5mm)	11. USB-C 2.0 (support data transfer, PD 3.0)
5. HDMI-in 1.4	12. Kensington Security Slot
6. Ethernet (RJ-45)	13. HDMI Switch Key
7. HDMI-out 2.1 TMDS	14. Power button

Notes:

- Items with * are only available on selected models

PERFORMANCE

Processor

Processor Family

13th Generation Intel® Core™ i5 / i7 Processor

Processor**^[1]

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
Core™ i5-13500H	12 (4 P-core + 8 E-core)	16	P-core 2.6GHz / E-core 1.9GHz	P-core 4.7GHz / E-core 3.5GHz ^[2]	18MB	Intel® Iris® Xe Graphics
Core™ i7-13700H	14 (6 P-core + 8 E-core)	20	P-core 2.4GHz / E-core 1.8GHz	P-core 5.0GHz / E-core 3.7GHz ^[3]	24MB	Intel® Iris® Xe Graphics

Notes:

^[1] Intel® Iris® Xe Graphics capability requires system to be configured with dual-channel memory. On the system with single-channel memory, Intel® Iris® Xe Graphics will function as Intel® UHD Graphics.

^[2], ^[3] Intel® Max Turbo frequency will vary depending on application workload and the hardware and software configurations, see <http://www.intel.com/technology/turboboost/> for more information.

Operating System

Operating System

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Ubuntu Linux^[1]
- No preload operating system

Notes:

^[1] Some features may not be supported on the system with Linux preload, including but not limited to Intel® RST RAID, Human Presence Detection, etc.

Graphics

Graphics**

Graphics	Type	Memory	Connector	Max Resolution	Key Features
Intel® Iris® Xe Graphics ^[1]	Integrated	Shared	1x HDMI® 2.1 TMDS	4096x2306@60Hz(HDMI®)	DirectX® 12.1
Intel® Arc™ A370M Graphics	Discrete	4GB GDDR6	1x HDMI® 2.1 TMDS	3840x2160@60Hz(HDMI®)	DirectX® 12 Ultimate

Notes:

^[1] Intel® Iris® Xe Graphics capability requires system to be configured with dual-channel memory. On the system with single-channel memory, Intel® Iris® Xe Graphics will function as Intel® UHD Graphics.

Monitor Support

Monitor Support

Supports up to 2 independent displays via native display and 1 external monitor; supports external monitor via HDMI®

Chipset

Chipset

Intel® SoC (System on Chip) platform

Memory

Max Memory^[1]

Up to 16GB DDR5-5200

Memory Slots

Two DDR5 SO-DIMM slots, dual-channel capable

ThinkCentre neo 50a 24 Gen 4

Memory Type

DDR5-5200

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

Storage

Storage Support^[1]

- Up to two drives, 1x 2.5" HDD + 1x M.2 SSD
 - 2.5" HDD up to 2TB
 - M.2 SSD up to 1TB
- For installing HDD storage, assembly kits are needed. The kits only come with HDD models.

Storage Type

Disk Type	Interface	Security
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	Opal 2.0

RAID

No support

Notes:

[1] The max capacity of each disk type is based on the test results with current Lenovo® storage offerings.

Removable Storage

Optical

- DVD burner (DVD±RW), SATA connector, slim (9.0mm)
- None

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio

Speakers

Stereo speakers, 3W x2, Audio by HARMAN

Microphone

Dual-microphone array

Camera**

- 5.0-megapixel IR camera, fixed focus
- 5.0-megapixel IR camera, fixed focus, with AI chip
- 5.0-megapixel, fixed focus
- No camera

Power Supply

Power Supply

Power	Type	Efficiency	Key Features
180W	Fixed	90%	100V - 240V, 50-60Hz

DESIGN

Display

Display**^[1]

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Refresh Rate	Viewing Angle (L/R/U/D)	Key Features

ThinkCentre neo 50a 24 Gen 4

23.8"	FHD (1920x1080)	None	IPS	250nits	Anti-glare	16:9	1000:1	72% NTSC	60Hz	89°/89°/89°/89°	14ms response Time, borderless design, low blue light, flicker free
23.8"	FHD (1920x1080)	Multi-touch	IPS	250nits	Anti-glare	16:9	1000:1	72% NTSC	60Hz	89°/89°/89°/89°	14ms response Time, borderless design, low blue light, flicker free

Touchscreen

- Advanced In-cell Touch (AIT), supports 10-point touch
- Non-touch

Notes:

[1] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

Input Device

Keyboard**

- Lenovo® Calliope Keyboard (USB connector), black
- Lenovo® Calliope Wireless Keyboard, black
- No keyboard

Mouse**

- Lenovo® Calliope Mouse (USB connector), black
- Lenovo® Calliope Wireless Mouse (2.4GHz via USB receiver), black
- No mouse

Mechanical

Form Factor

AIO (23.8 inches)

Dimensions (WxDxH)^[1]

Models	Dimensions
Models with monitor stand	541 x 209.9 x 433.7 mm (21.3 x 8.3 x 17.1 inches)
Models with liftable monitor stand	541 x 220 x 482 mm (21.3 x 8.7 x 19 inches)

Packaging Dimensions (WxDxH)

- Models with liftable monitor stand: 658 x 264 x 570 mm (25.9 x 10.4 x 22.44 inches)
- Models with monitor stand: 695 x 196 x 554 mm (27.4 x 7.7 x 21.81 inches)

Weight^[2]

Models	Weight
Models with monitor stand	Around 7.42 kg (16.36 lbs)
Models with liftable monitor stand	Around 7.64 kg (16.84 lbs)

Packaging Weight

- Models with liftable monitor stand: 11.88 kg (26.19 lbs)
- Models with monitor stand: 11.04 kg (24.34 lbs)

Case Color

Raven black

Bays

- 1x 2.5" disk bay
- 1x slim ODD bay
- For installing HDD storage, assembly kits are needed. The kits only come with HDD models.

ThinkCentre neo 50a 24 Gen 4

Expansion Slots

Two M.2 slots (one for WLAN, one for SSD)

Stand**

- Monitor stand, supports -5° to +25° tilt, left & right 45° swivel
- Lifiable monitor stand, supports -5° to +18° tilt, left & right 45° swivel, up to 100mm lift

Mounting

Supports VESA mount 100mm

Others

Supports Smart Power On

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

Onboard Ethernet

Gigabit Ethernet, Realtek® RTL8111K-CG, 1x RJ-45

WLAN + Bluetooth®**

- Realtek® Wi-Fi® 6 RTL8852BE, 802.11ax Dual Band 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 card^[1]
- Intel® Wi-Fi® 6 AX201, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.2, M.2 Card^[2]

Notes:

[1] Bluetooth® 5.3 requires Windows® 11.

[2] Bluetooth® 5.2 requires Windows® 11.

Ports^[1]

Rear Ports

- 1x USB-C® 2.0 (Supports data transfer, Power Delivery 3.0)
- 2x USB-C® 3.2 Gen 2
- 1x USB 2.0
- 1x USB 3.2 Gen 2 (Supports smart power-on)
- 1x HDMI®-in 1.4
- 1x HDMI®-out 2.1 TMDS
- 1x Ethernet (RJ-45)
- 1x headphone / microphone combo jack (3.5mm)

Left Ports

1x USB 3.2 Gen 1

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

SECURITY & PRIVACY

Security

Security Chip

Firmware TPM 2.0 integrated in SoC

Physical Locks

Kensington® Security Slot™, 3 x 7 mm

BIOS Security

- Administrator password
- Cover presence switch
- Hard disk password
- Intel® BIOS guard
- Power-on password

SERVICE

Warranty^[1]

Base Warranty

- 1-year courier or carry-in service
- 1-year limited onsite service

Notes:

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

ACCESSORIES

Bundled Accessories

Bundled Accessories

- USB-C® to USB-A dongle
- None

OPERATING REQUIREMENTS

Operating Environment

Temperature

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -20°C (-4°F) to 60°C (140°F)

Relative Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

CERTIFICATIONS

Green Certifications^[1]

Green Certifications

- (Optional) ENERGY STAR® 8.0
- (Optional) EPEAT™ Silver Registered^[2]

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2] EPEAT™ is registered where applicable, please visit peat.net for registration status by country.

Other Certifications

Other Certifications

- TÜV Rheinland® Flicker Free
- TÜV Rheinland® Low Blue Light
- TÜV Rheinland® Ultra Low Noise

Mil-Spec Test

None

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



intel



intel



intel



intel



intel



intel