


OVERVIEW

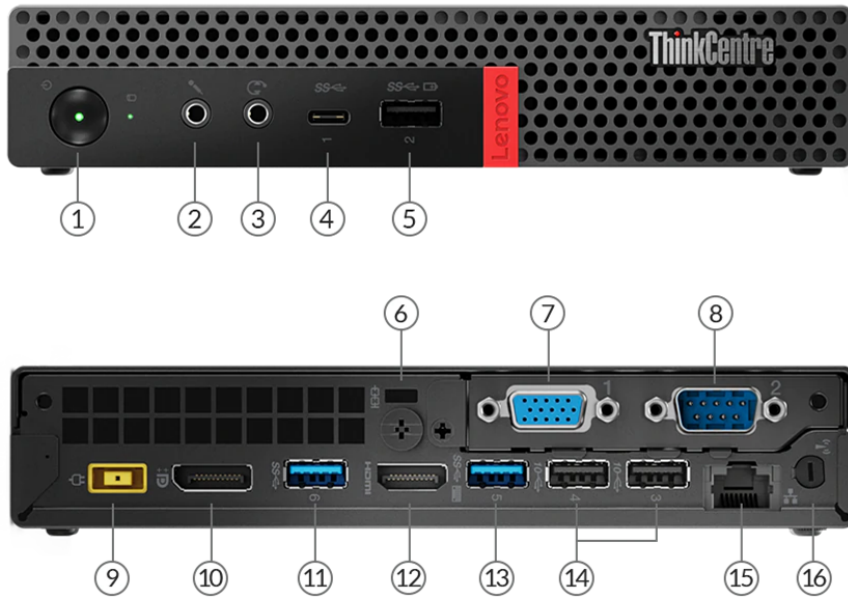

1. Power button	9. Power connector
2. Microphone (3.5mm)	10. DisplayPort
3. Headphone / microphone combo jack (3.5mm)	11. USB 3.1 Gen 1
4. USB-C 3.1 Gen 1	12. HDMI
5. USB 3.1 Gen 1	13. USB 3.1 Gen 1
6. Kensington Security Slot	14. 2x USB 3.1 Gen 2
7. Optional port 1 (VGA is shown) *	15. Ethernet (RJ-45)
8. Optional port 2 (serial is shown) *	16. Wi-Fi antenna *

Notes:

- Ports with * are only available on selected models

PERFORMANCE

Processor

Processor Family

9th Generation Intel® Core™ i5 Processor

Processor

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i5-9600T	6	6	2.3GHz	3.9GHz	9MB	DDR4-2666	Intel UHD Graphics 630

Operating System

Operating System

Windows® 10 IoT Enterprise with Microsoft® Teams room for Poly

Graphics

Graphics^[1]

Graphics	Type	Memory	Connector	Max Resolution	Key Features
Intel UHD graphics 630	Integrated	Shared	1x HDMI®, 1x 2nd HDMI (internal DP to HDMI dongle), 1x DP	4096x2160@24Hz(onboard HDMI), 4096x2304@60Hz(DP)	DirectX® 12

Notes:

- The information of integrated graphics are not applicable for the models without integrated graphics (for the details, please refer to processor section)

Monitor Support

Monitor Support

Supports up to 3 independent displays via (2x HDMI and DP)

Chipset

Chipset

Intel Q370 chipset

Memory

Max Memory^[1]

Up to 8GB DDR4-2666

Memory Slots

Two DDR4 SO-DIMM slots, dual-channel capable

Memory Type

DDR4-2666

Notes:

- The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support

One drive, 128GB M.2 2242 SSD

Storage Type

Disk Type	Interface	RPM	Security
M.2 2242 SSD	PCIe® NVMe®, PCIe 3.0 x2	-	-

RAID

No support

Removable Storage

Optical

None

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC233VB2 codec

Speakers

Single speaker, 1.5W x1

Power Supply

Power Supply

Power	Type	Efficiency	Key Features
135W	Adapter	88%	Autosensing

DESIGN

Input Device

Keyboard

No keyboard

Mouse

No mouse

Mechanical

Form Factor

Tiny (1L)

Dimensions (WxDxH)

Models	Dimensions
All models	179 x 183 x 34.5 / 37 mm with rubber feet (7.05 x 7.2 x 1.36 / 1.5 inches with rubber feet)

Weight

Models	Weight
All models	1.32 kg (2.91 lbs)

Case Color

Black

Bays

No bays

Expansion Slots

Two M.2 slots (one for WLAN, one for SSD)

EOU

No support

Stand

No stand

IO Box

No IO box

Mounting

VESA mount bracket kit, supports VESA mount 75mm and 100mm

Others

Power adapter cage

CONNECTIVITY

Network

Onboard Ethernet

Gigabit Ethernet, Intel Ethernet Connection I219-LM, 1x RJ-45, supports Wake-on-LAN

WLAN + Bluetooth®

Intel Wireless-AC 9560, 802.11ac Dual Band 2x2 Wi-Fi® + Bluetooth 5.0, Intel vPro technology support, M.2 card

Ports^[1]

Front Ports

- 1x USB 3.1 Gen 1 (Always On and fast charge)
- 1x USB-C 3.1 Gen 1
- 1x headphone / microphone combo jack (3.5mm)
- 1x microphone (3.5mm)

Optional Front Ports

None

Rear Ports^[2]

- 2x USB 3.1 Gen 1
- 2x USB 3.1 Gen 2
- 2x HDMI
- 1x DisplayPort™
- 1x Ethernet (RJ-45)

Optional Rear Ports

None

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt™ 3: 40 Gbit/s;
FireWire 400: 400 Mbit/s;
FireWire 800: 800 Mbit/s
2. For video ports on discrete graphics, please see graphics section

Monitor Cable

Monitor Cable

No monitor cable

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

Kensington® Security Slot

Chassis Intrusion Switch

Chassis intrusion switch

Fingerprint Reader

No fingerprint reader

BIOS Security

- Administrator password

- Power-on password
- Hard disk password
- Boot sequence control
- Boot without keyboard and mouse
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- Individual USB port disablement

MANAGEABILITY

System Management

System Management

Intel vPro with Intel AMT 12.0

SERVICE

Warranty

Base Warranty

Please consult with Poly

ENVIRONMENTAL

Operating Environment

Temperature

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

CERTIFICATIONS

Green Certifications

Green Certifications

- EPEAT™ Gold
- ENERGY STAR® 8.0
- ErP Lot 3
- TCO
- RoHS compliant

Other Certifications

Mil-Spec Test

MIL-STD-810G military test passed (Low Pressure [Altitude], High Temperature, Low Temperature, Temperature Shock, Humidity, Sand and Dust, Vibration, Shock, Fungus, Solar Radiation)

- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow

disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.

- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

