


OVERVIEW

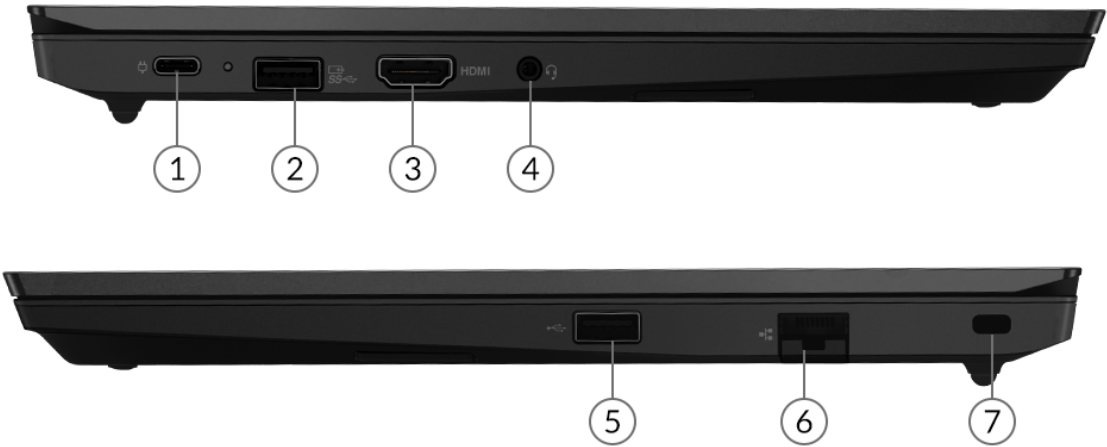

1. USB-C 3.2 Gen 1	5. USB 2.0
2. USB 3.2 Gen 1 (Always On)	6. Ethernet (RJ-45) *
3. HDMI 1.4b	7. Kensington Security Slot
4. Headphone / microphone combo jack (3.5mm)	

- Notes:
- Items with * are only available on selected models

PERFORMANCE

Processor

Processor Family

AMD Ryzen™ 3 / 5 / 7 Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
AMD Ryzen™ 3 5425U	4	8	2.7GHz	4.1GHz	2MB L2 / 8MB L3	AMD Radeon™ Graphics
AMD Ryzen™ 5 5625U	6	12	2.3GHz	4.3GHz	3MB L2 / 16MB L3	AMD Radeon™ Graphics
AMD Ryzen™ 5 PRO 5675U	6	12	2.3GHz	4.3GHz	3MB L2 / 16MB L3	AMD Radeon™ Graphics
AMD Ryzen™ 7 5825U	8	16	2.0GHz	4.5GHz	4MB L2 / 16MB L3	AMD Radeon™ Graphics

Operating System

Operating System**

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Windows® 11 DG Windows® 10 Pro 64^[1]
- No preload operating system^[2]

Notes:

^[1] Windows® 11 DG Windows® 10 Pro 64 is for special bid only.

^[2] No operating system is for special bid only.

Graphics

Graphics

Graphics	Type	Memory	TGP	Key Features
AMD Radeon™ Graphics	Integrated	Shared	Share CPU TDP	DirectX® 12

Monitor Support

Monitor Support

Supports up to 3 independent displays (native display and 2 external monitors via HDMI® and USB-C®)

- HDMI® supports up to 3840x2160@30Hz
- USB-C® supports up to 4096x2160@60Hz

Chipset

Chipset

AMD SoC (System on Chip) platform

Memory

Max Memory^[1]

Up to 40GB (8GB soldered + 32GB SO-DIMM) DDR4-3200

Memory Slots

One memory soldered to systemboard, one DDR4 SO-DIMM slot, dual-channel capable

Memory Type

DDR4-3200

Notes:

^[1] The max memory is based on the test results with current Lenovo® memory offerings.

Storage

Storage Support^{[1][2]}

Up to two drives, 2x M.2 SSD

- M.2 2242 SSD up to 512GB

- M.2 2280 SSD up to 1TB

Storage Slot

Two M.2 slots

- One M.2 2242 PCIe® 3.0 x4 slot
- One M.2 2280 PCIe® 3.0 x4 slot

Storage Type***

Disk Type	Interface	Offering	Security
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4 ^[3]	1TB	Opal 2.0
M.2 2242 SSD	PCIe® NVMe®, PCIe® 4.0 x4 ^[4]	256GB / 512GB	Opal 2.0

Notes:

- [1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.
- [2] The system supports dual SSD via two M.2 slots, but Lenovo® only offers one SSD configuration, another SSD slot for user self-extension.
- [3], [4] The SSD with PCIe® 4.0x4 is downgraded to closer to PCIe® 3.0x4 due to the system slot limitation.

Removable Storage

Optical

None

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 2W x2, Dolby® Audio™, audio by HARMAN

Microphone

Dual-microphone array, near-field

Camera**

- FHD 1080p + IR hybrid, with privacy shutter, fixed focus
- FHD 1080p, with privacy shutter, fixed focus
- HD 720p, with privacy shutter, fixed focus

Battery

Battery**

- Integrated Li-Polymer 45Wh battery, supports Rapid Charge (charge up to 80% in 1hr)
- Integrated Li-Polymer 57Wh battery

Max Battery Life^[1]

- Models with 45Wh battery:
MobileMark® 2018: 9.2 hr
JEITA 2.0: 12.1 hr
- Models with 57Wh battery:
MobileMark® 2018: 15.0 hr
JEITA 2.0: 21.0 hr

Notes:

- [1] All battery life claims are approximate maximum and based on results using the MobileMark® 2014, MobileMark® 2018, MobileMark® 25, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary depending on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter**^[1]

- 65W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz

Notes:

[1] AC adapter offerings depend on the country.

DESIGN

Display

Display**[1]

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle (L/R/U/D)
14"	FHD (1920x1080)	None	TN	250nits	Anti-glare	16:9	500:1	45% NTSC	45°/45°/15°/35°
14"	FHD (1920x1080)	None	IPS[2]	300nits	Anti-glare	16:9	800:1	45% NTSC	85°/85°/85°/85°
14"	FHD (1920x1080)	None	IPS	300nits	Anti-glare	16:9	1200:1	100% sRGB	85°/85°/85°/85°

Touchscreen

Non-touch

Notes:

[1] Display with FHD 100% sRGB is NOT available in EMEA.

[2] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

Input Device

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls

Keyboard Backlight

- LED backlight
- Non-backlight

UltraNav™

TrackPoint® pointing device and Mylar® surface multi-touch touchpad, 57 x 100 mm (2.24 x 3.94 inches)

Mechanical

Dimensions (WxDxH)[1]

Models	Dimensions
Aluminium (top), aluminium (bottom) models	324 x 220.7 x 17.9 mm (12.76 x 8.69 x 0.7 inches)
Aluminium (top), PC-ABS (bottom) models	324 x 220.7 x 18.9 mm (12.76 x 8.69 x 0.74 inches)

Weight[2]

Models	Weight
Aluminium (top), PC-ABS (bottom) models	Starting at 1.59 kg (3.51 lbs)
Aluminium (top), aluminium (bottom) models	Starting at 1.64 kg (3.62 lbs)

Case Color**

- Black
- Mineral metallic[3]

Case Material**

- Aluminium (top), PC-ABS (bottom)
- Aluminium (top), aluminium (bottom)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

[3] Mineral metallic case is NOT available in EMEA.

CONNECTIVITY

Network

Ethernet

- Gigabit Ethernet, Realtek® RTL8111H-CG, 1x RJ-45, supports Wake-on-LAN
- No onboard Ethernet

WLAN + Bluetooth®**[1]

- Wi-Fi® 6, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.1, M.2 card^[2]
- MediaTek Wi-Fi® 6 MT7921, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.1, M.2 Card^[3]
- Realtek® Wi-Fi® 6 RTL8852BE, 802.11ax Dual Band 2x2 Wi-Fi® + Bluetooth® 5.1, M.2 card^[4]
- Wi-Fi® 6E, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.1, M.2 card^[5]
- Realtek® Wi-Fi® 6E RTL8852CE, 802.11ax Dual Band 2x2 Wi-Fi® + Bluetooth® 5.1, M.2 card^[6]
- AMD Wi-Fi® 6E RZ616, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.1, M.2 Card^[7]

WWAN

No support

SIM Card

No physical SIM card inbox

NFC

No support

Notes:

[1] Bluetooth® may operate at a lower version than hardware design depending on the factors such as operating system, driver, etc.

[2], [3], [4] Wi-Fi® 6 full features might be limited by country-level restrictions.

[5], [6], [7] Wi-Fi® 6E full features might be limited by country-level restrictions.

Wi-Fi® 6E is only enabled on Windows® 11 and operates as Wi-Fi® 6 with Windows® 10.

6GHz Wi-Fi® 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi® 6E, and the regional regulatory certifications & spectrum allocation.

Ports^[1]

Standard Ports

- 1x USB 2.0
- 1x USB 3.2 Gen 1 (Always On)
- 1x USB-C® 3.2 Gen 1 (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.2)
- 1x HDMI® 1.4b
- 1x Headphone / microphone combo jack (3.5mm)

Optional Ports

1x Ethernet (RJ-45)

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

Docking

Docking

Various docking solutions supported via USB-C®.

For more compatible docking solutions, please visit [Docking for ThinkPad® E14 Gen 4 \(AMD\)](#)

SECURITY & PRIVACY**Security****Security Chip****

- Firmware TPM 2.0 integrated in SoC
- Discrete TPM 2.0, TCG certified, FIPS 140-2 certified

Physical Locks

Kensington® Security Slot™, 3 x 7 mm

Smart Card Reader

No smart card reader

Fingerprint Reader

- Touch style fingerprint reader integrated in power button
- No fingerprint reader

BIOS Security

- Power-on password
- Supervisor password
- NVMe® password
- Self-healing BIOS

Other Security

- (Optional) IR camera for Windows® Hello (facial recognition)
- Camera privacy shutter

SERVICE**Warranty****Base Warranty****

- 1-year mail-in service
- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service
- No base warranty

ENVIRONMENTAL**Operating Environment****Temperature^[1]**

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Relative Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

CERTIFICATIONS

Green Certifications^[1]

Green Certifications^[2]

- ENERGY STAR® 8.0
- EPEAT™ Gold Registered^[3]
- ErP Lot 3
- RoHS compliant
- TCO Certified

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.

[2] EPEAT™ registration and ENERGY STAR® certification are dependent on system OS. Please visit epeat.net and energystar.gov for more information.

[3] EPEAT™ is registered where applicable, please see epeat.net for registration status by country.

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed


Other Certifications

TÜV Rheinland® Low Blue Light (Software Solution)

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



AMD

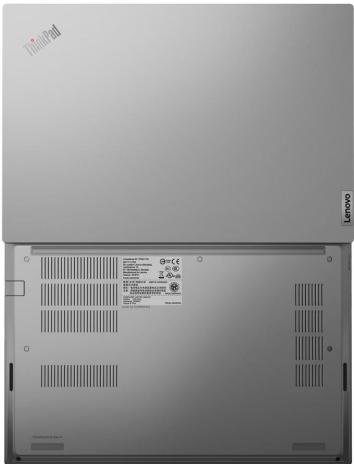

AMD



AMD



AMD



AMD



AMD