


## OVERVIEW

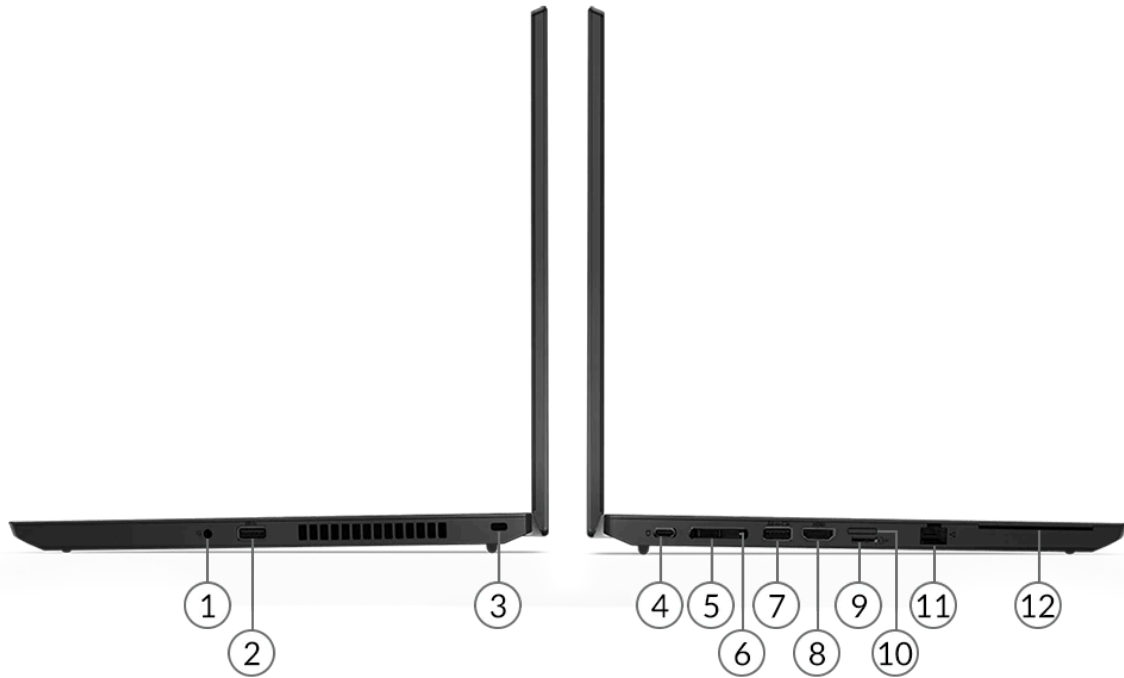

1. Headphone / microphone combo jack (3.5mm)	7. USB 3.2 Gen 1 (Always On)
2. USB 3.2 Gen 1	8. HDMI 1.4b
3. Kensington Security Slot	9. MicroSD card reader
4. USB-C 3.2 Gen 1	10. Nano-SIM card slot *
5. USB-C 3.2 Gen 2	11. Ethernet (RJ-45)
6. Side docking connector	12. Smart card reader *

Notes:

- Ports with \* are only available on selected models
- The combination of 5 and 6 is side docking connector

## PERFORMANCE

### Processor

#### Processor Family

AMD Ryzen™ 3 / 5 / 7 Processor

#### Processor

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
AMD Ryzen 3 4300U	4	4	2.7GHz	3.7GHz	2MB L2 / 4MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen 3 PRO 4450U	4	8	2.5GHz	3.7GHz	2MB L2 / 4MB L3	DDR4-3200	AMD Radeon Graphics
AMD Ryzen 5 4500U	6	6	2.3GHz	4.0GHz	3MB L2 / 8MB L3	DDR4-3200	AMD Radeon Graphics
AMD Ryzen 5 PRO 4650U	6	12	2.1GHz	4.0GHz	3MB L2 / 8MB L3	DDR4-3200	AMD Radeon Graphics
AMD Ryzen 7 PRO 4750U	8	16	1.7GHz	4.1GHz	4MB L2 / 8MB L3	DDR4-3200	AMD Radeon Graphics

### Operating System

#### Operating System

- Windows® 10 Home 64
- Windows 10 Pro 64
- Linux
- Ubuntu Linux
- No operating system

### Graphics

#### Graphics

Graphics	Type	Memory	Key Features
AMD Radeon Graphics	Integrated	Shared	DirectX® 12

### Monitor Support

#### Monitor Support

Supports up to 4 independent displays via native display and 3 external monitors; supports external monitors via HDMI® (up to 4096x2160@24Hz) or USB-C (up to 3840x2160@60Hz)

### Chipset

#### Chipset

AMD SoC (System on Chip) platform

### Memory

#### Max Memory<sup>[1]</sup>

Up to 64GB DDR4-3200

#### Memory Slots

Two DDR4 SO-DIMM slots, dual-channel capable

#### Memory Type

DDR4-3200

#### Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

### Storage

**Storage Support**

One drive, up to 512GB M.2 2242 SSD or 1TB M.2 2280 SSD

**Storage Type**

Disk Type	Interface	RPM	Security
M.2 2242 SSD	PCIe NVMe, PCIe 3.0 x4	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	Opal2

**Removable Storage****Optical**

None

**Card Reader**

MicroSD card reader

**Multi-Media****Audio Chip**

High Definition (HD) Audio, Realtek® ALC3287 codec

**Speakers**

Stereo speakers, 2W x2, Dolby® Audio™

**Microphone<sup>[1]</sup>**

- Dual array microphone, far-field
- No microphone

**Camera<sup>[2]</sup>**

- 720p, with ThinkShutter, fixed focus
- IR & 720p hybrid, with ThinkShutter, fixed focus
- No camera

**Notes:**

1. No microphone is for special bid only
2. No camera is for special bid only

**Battery****Battery**

Integrated Li-Polymer 45Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

**Max Battery Life<sup>[1]</sup>**

MobileMark® 2014: 13.78 hr

MobileMark 2018: 10.43 hr

JEITA 2.0: 15.7 hr

**Notes:**

1. All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, and/or JEITA 2.0 battery-life benchmark tests. Actual battery life will vary and depends on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

**Power Adapter****Power Adapter<sup>[1]</sup>**

- 45W USB-C (2-pin) AC adapter
- 45W USB-C (3-pin) AC adapter
- 65W USB-C (2-pin) AC adapter
- 65W USB-C (3-pin) AC adapter
- No power adapter

**Notes:**

1. No power adapter is for special bid only

## DESIGN

### Display

#### Display<sup>[1]</sup>

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle	Key Features
15.6"	HD (1366x768)	None	TN	220 nits	Anti-glare	16:9	400:1	45% NTSC	90°	-
15.6"	FHD (1920x1080)	None	IPS	250 nits	Anti-glare	16:9	700:1	45% NTSC	170°	-
15.6"	FHD (1920x1080)	Multi-touch	IPS	300 nits	Anti-glare	16:9	700:1	45% NTSC	170°	-

#### Touchscreen

- On-cell touch, supports 10-point touch
- Non-touch

#### Notes:

1. California Electronic Waste Recycling Fee  
In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

### Input Device

#### Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls, numeric keypad

#### Keyboard Backlight

- LED backlight
- No support

#### UltraNav™

TrackPoint® pointing device and Mylar® surface multi-touch touchpad

### Mechanical

#### Dimensions (WxDxH)

366.5 x 250 x 21 mm (14.43 x 9.84 x 0.83 inches)

#### Weight<sup>[1]</sup>

1.98 kg (4.37 lbs)

#### Case Color

Black

#### Case Material

PC + ABS (top), PC + ABS (bottom)

#### Notes:

1. The system weight varies depending on configurations

## CONNECTIVITY

### Network

#### Onboard Ethernet

- Gigabit Ethernet, Realtek RTL8111HN (non-DASH models)
- Gigabit Ethernet, Realtek RTL8111EPV (DASH models)

#### WLAN + Bluetooth<sup>[1]</sup>

- Wi-Fi® 6, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2, M.2 card
- Mediatek Wi-Fi 6 MT7921, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2, M.2 Card
- Realtek RTL8852AE, Wi-Fi 6, 802.11ax Dual Band 2x2 Wi-Fi + Bluetooth 5.2, M.2 card
- Intel® Wi-Fi 6 AX200, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2, M.2 card

# ThinkPad L15 Gen 1 (AMD)

- No WLAN and Bluetooth

## WWAN<sup>[2]</sup>

- Wireless WAN upgradable to 4G
- Integrated Mobile Broadband 4G LTE-A, CAT9, Fibocom L850-GL, M.2 card
- No support

## SIM Card

- Gemalto eSIM
- No SIM card inbox

## NFC

No support

## Notes:

1. Intel WiFi 6 full features might be limited by country level restrictions  
Bluetooth 5.2 is supported with driver version 22.30 and later
2. For non-WWAN model, it means the model is NOT WWAN upgradable

## Ports<sup>[1]</sup>

### Standard Ports<sup>[2]</sup>

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 1x USB-C 3.2 Gen 1 (support data transfer, Power Delivery and DisplayPort™ 1.2)
- 1x USB-C 3.2 Gen 2 (support data transfer, Power Delivery and DisplayPort 1.2)
- 1x HDMI 1.4b
- 1x microSD card reader
- 1x Ethernet (RJ-45)
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Side docking connector

### Optional Ports

- 1x Nano-SIM card slot (WWAN model)
- 1x Smart card reader

## Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.  
USB 2.0: 480 Mbit/s;  
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;  
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;  
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;  
Thunderbolt™ 3: 40 Gbit/s;  
FireWire 400: 400 Mbit/s;  
FireWire 800: 800 Mbit/s
2. Depending on many factors, actual data transfer speed may be lower than theoretical speed

## Monitor Cable

### Monitor Cable

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to DisplayPort Adapter
- Lenovo USB-C to VGA Adapter
- No monitor cable

## SECURITY & PRIVACY

### Security

#### Security Chip

- Discrete TPM 2.0, TCG certified
- Firmware TPM 2.0 integrated in chipset
- Disabled (in some regions)

#### Physical Locks

Kensington® Security Slot

**Smart Card Reader**

- Smart card reader
- No smart card reader

**Fingerprint Reader**

- Touch style fingerprint reader on palm rest, match-on-host
- No fingerprint reader

**BIOS Security**

- Supervisor password
- Power-on password
- Hard disk password
- Self-healing BIOS

**Other Security**

- (Optional) ThinkShutter camera cover
- (Optional) IR camera for Windows Hello

## MANAGEABILITY

### System Management

**System Management**

- DASH
- None

## SERVICE

### Warranty

**Base Warranty**

- 1-year depot service
- 1-year depot with 2-year system board service
- 1-year limited onsite service
- 1-year + 2-year depot service
- 1-year + 2-year limited onsite service
- 3-year (1-yr battery) depot service
- 3-year (1-yr battery) limited onsite service
- No base warranty

## ENVIRONMENTAL

### Operating Environment

**Temperature<sup>[1]</sup>**

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

**Humidity**

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

**Altitude**

Maximum altitude (without pressurization): 3048 m (10,000 ft)

**Notes:**

1. When you charge the battery, its temperature must be no lower than 10°C (50°F)

## CERTIFICATIONS

### Green Certifications

## Green Certifications

- EPEAT™ Gold
- ENERGY STAR® 8.0
- TCO
- RoHS compliant

## Other Certifications

### Mil-Spec Test

MIL-STD-810G military test passed



AMD



AMD



AMD



AMD



AMD



AMD