


OVERVIEW

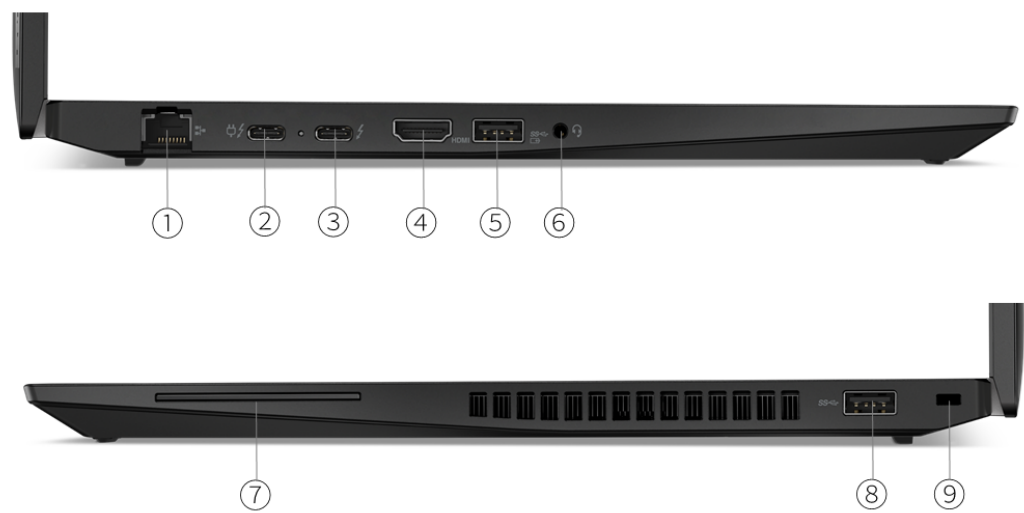

1. Ethernet (RJ-45)	6. Headphone / microphone combo jack (3.5mm)
2. Thunderbolt 4	7. Smart card reader *
3. Thunderbolt 4	8. USB 3.2 Gen 1
4. HDMI	9. Security keyhole
5. USB 3.2 Gen 1 (Always On)	

Notes:

- Items with \* are only available on selected models

PERFORMANCE

Processor

Processor Family

12th Generation P series Intel® Core™ i5 / i7 processor, supports up to 14 cores, up to 4.8GHz

Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
Core™ i5-1240P	12 (4 P-core + 8 E-core)	16	P-core 1.7GHz / E-core 1.2GHz	P-core 4.4GHz / E-core 3.3GHz	12MB	Intel® Iris® Xe Graphics
Core™ i5-1250P	12 (4 P-core + 8 E-core)	16	P-core 1.7GHz / E-core 1.2GHz	P-core 4.4GHz / E-core 3.3GHz	12MB	Intel® Iris® Xe Graphics
Core™ i7-1260P	12 (4 P-core + 8 E-core)	16	P-core 2.1GHz / E-core 1.5GHz	P-core 4.7GHz / E-core 3.4GHz	18MB	Intel® Iris® Xe Graphics
Core™ i7-1270P	12 (4 P-core + 8 E-core)	16	P-core 2.2GHz / E-core 1.6GHz	P-core 4.8GHz / E-core 3.5GHz	18MB	Intel® Iris® Xe Graphics
Core™ i7-1280P	14 (6 P-core + 8 E-core)	20	P-core 1.8GHz / E-core 1.3GHz	P-core 4.8GHz / E-core 3.6GHz	24MB	Intel® Iris® Xe Graphics

Operating System

Operating System\*\*

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Windows® 11 DG Windows® 10 Pro 64
- Windows® 10 Home 64 Single Language
- Red Hat Enterprise Linux 8.6 (certified only, for detailed and latest information, please visit [Red Hat Certified Hardware](#))
- Ubuntu Linux LTS

Graphics

Graphics\*\*

Graphics	Type	Memory	TGP	Key Features
Intel® Iris® Xe Graphics <sup>[1]</sup>	Integrated	Shared	Share CPU TDP	DirectX® 12.1
NVIDIA® T550 Laptop GPU	Discrete	4GB GDDR6	30W	DirectX® 12

Notes:

[1] Intel® Iris® Xe Graphics capability requires system to be configured with dual-channel memory. On the system with single-channel memory, Intel® Iris® Xe Graphics will function as Intel® UHD Graphics.

Monitor Support

Monitor Support

Supports up to 4 independent displays (native display and 3 external monitors via HDMI® and Thunderbolt™)

- HDMI® supports up to 3840x2160@60Hz
- Thunderbolt™ supports up to 7680x4320@60Hz

Chipset

Chipset

Intel® SoC (System on Chip) platform

Memory

Max Memory

- Up to 40GB (8GB soldered + 32GB SO-DIMM) DDR4-3200
- Up to 48GB (16GB soldered + 32GB SO-DIMM) DDR4-3200

Memory Slots

One memory soldered to systemboard, one DDR4 SO-DIMM slot, dual-channel capable

Memory Type

DDR4-3200 non-ECC

Storage

Storage Support<sup>[1]</sup>

One drive, up to 2TB M.2 2280 SSD

Storage Slot

One M.2 2280 PCIe® 4.0 x4 slot

Storage Type<sup>\*\*[2]</sup>

Disk Type	Interface	Offering	Security
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4 Performance	512GB / 1TB / 2TB	Opal 2.0
M.2 2280 SSD	PCIe® NVMe®, PCIe® x4	256GB / 512GB / 1TB	Opal 2.0

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.

[2] PCIe® x4 SSD may be PCIe® 3.0 x4 or PCIe® 4.0 x4 as substitution.

Removable Storage

Optical

None

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, Dolby® Audio™

Microphone

- Dual-microphone array, Dolby® Voice
- No microphone

Camera<sup>\*\*</sup>

- FHD 1080p + IR, with privacy shutter, fixed focus
- FHD 1080p, with privacy shutter, fixed focus
- HD 720p, with privacy shutter, fixed focus
- No camera

Battery

Battery<sup>\*\*</sup>

- Integrated Li-Polymer 52.5Wh battery, supports Rapid Charge (charge up to 80% in 1hr)
- Integrated Li-Polymer 86Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 135W AC adapter

Power Adapter

Power Adapter<sup>\*\*[1]</sup>

- 65W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 100W USB-C® slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 135W USB-C® slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter

Notes:

[1] AC adapter offerings depend on the country.

DESIGN

Display

Display\*\*<sup>[1]</sup>

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle (L/R/U/D)	Key Features
16"	WUXGA (1920x1200)	None	IPS	300nits	Anti-glare	16:10	800:1	45% NTSC	85°/85°/85°/85°	85.4% screen to body ratio, DC dimming
16"	WUXGA (1920x1200)	Multi-touch	IPS	300nits	Anti-glare	16:10	800:1	45% NTSC	85°/85°/85°/85°	85.4% screen to body ratio, DC dimming
16"	WUXGA (1920x1200)	None	IPS	400nits	Anti-glare	16:10	1000:1	100% sRGB	89°/89°/89°/89°	ICC Template color calibration, Low power, Low blue light, TUV Eye Comfort, 85.4% screen to body ratio, DC dimming
16"	WUXGA (1920x1200)	Multi-touch	IPS	500nits	Anti-glare	16:10	1000:1	100% sRGB	85°/85°/85°/85°	ThinkPad® Privacy Guard, Low Blue Light, TUV Eye Comfort, 85.4% screen to body ratio, DC dimming
16"	WQXGA (2560x1600)	None	IPS	400nits	Anti-glare	16:10	1200:1	100% sRGB	85°/85°/85°/85°	Dolby® Vision™, X-Rite® Factory Color Calibration (ΔE<2), Low blue light, TUV Eye Comfort, 85.4% screen to body ratio, DC dimming

Color Calibration\*\*

- X-Rite® factory color calibration (WQXGA display)
- ICC Template color calibration (selected WUXGA display)
- No color calibration

Touchscreen

- On-cell multi-touch, supports 10-point touch
- Non-touch

Notes:

<sup>[1]</sup> IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

Input Device

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls, numeric keypad

Keyboard Backlight

- LED backlight
- Non-backlight

UltraNav™

3-button TrackPoint® pointing device and glass-like Mylar® surface multi-touch touchpad, 67 x 115 mm (2.64 x 4.53 inches)

Mechanical

Dimensions (WxDxH)<sup>[1]</sup>

Models	Dimensions
NVIDIA® graphics models	361.9 x 255.5 x 21.1 mm (14.25 x 10.06 x 0.83 inches)

Integrated graphics models	361.98 x 255.5 x 20.5 mm (14.25 x 10.06 x 0.81 inches)
----------------------------	--

Weight<sup>[2][3]</sup>

Models	Weight
Models with black cover	Starting at 1.8 kg (3.97 lbs)
Models with grey cover	Starting at 1.83 kg (4.04 lbs)

Case Color\*\*

- Black
- Storm grey

Case Material\*\*

- Models with black cover: PC 50% GF + PC 20% CF (top), PPS (bottom)
- Models with grey cover: aluminium (top), PPS (bottom)

Notes:

- [1] The system dimensions may vary depending on configurations.
- [2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.
- [3] Starting weight is based on minimal configuration (integrated graphics, lowest capacity battery, no WWAN, etc).

CONNECTIVITY

Network

Ethernet\*\*

- Gigabit Ethernet, Intel® Ethernet Connection I219-LM (vPro® models), 1x RJ-45, supports Wake-on-LAN
- Gigabit Ethernet, Intel® Ethernet Connection I219-V (non-vPro® models), 1x RJ-45, supports Wake-on-LAN

WLAN + Bluetooth®\*\*<sup>[1]</sup>

- Qualcomm® Wi-Fi® 6E NFA725A, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.1
- Intel® Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.1 (Bluetooth® 5.3 hardware ready)

WWAN\*\*

- Wireless WAN upgradable to 4G (with antenna ready)
- Quectel EM05-G, 4G LTE CAT4, M.2 card
- Fibocom L860-GL-16, 4G LTE CAT16, M.2 card
- No support

SIM Card

- Gemalto eSIM card (physical)
- No physical SIM card inbox

NFC

- Near Field Communication
- No support

Notes:

- [1] Bluetooth® 5.3 is hardware ready but may run at a lower version due to OS limitations.

Ports<sup>[1]</sup>

Standard Ports

- 2x USB 3.2 Gen 1 (one Always On)
- 2x Thunderbolt™ 4 / USB4® 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort™ 2.0)
- 1x HDMI® 2.1, up to 4K/60Hz
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Ethernet (RJ-45)
- 1x Security keyhole

Optional Ports

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)

---

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

## Docking

### Docking

Various docking solutions supported via Thunderbolt™ or USB-C®.

For more compatible docking solutions, please visit [Docking for ThinkPad® P16s Gen 1 \(Intel®\)](#)

## Monitor Cable

### Monitor Cable\*\*

- Lenovo® HDMI® to VGA Monitor Adapter
- Lenovo® USB-C® to VGA Adapter
- Lenovo® USB-C® to DisplayPort™ Adapter
- No monitor cable

## SECURITY & PRIVACY

### Security

#### Security Chip

Discrete TPM 2.0, TCG certified, FIPS 140-2 certified

#### Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

#### Smart Card Reader

- Smart card reader
- No smart card reader

#### Fingerprint Reader

- Touch style fingerprint reader integrated in power button, match-on-chip
- No fingerprint reader

#### BIOS Security

- Power-on password
- Supervisor password
- NVMe® password
- Self-healing BIOS

#### Other Security

- (Optional) IR camera for Windows® Hello (facial recognition)
- (Optional) Camera privacy shutter

## MANAGEABILITY

### System Management

#### System Management<sup>[1]</sup>

- Intel® vPro® Enterprise
- Non-vPro®

---

Notes:

[1] Intel® vPro® offers a superset of DASH's defined capabilities.

## SERVICE

## Warranty

### Base Warranty\*\*

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) limited onsite service
- No base warranty

## ENVIRONMENTAL

## Sustainability

### Material

97% PCC recycled plastic used in speaker enclosure  
97% PCC recycled plastic used in the 52.5Wh battery  
95% PCC recycled plastic used in standard 65W adapter  
Low-temperature solder  
90% recycled and/or sustainable packaging

## Operating Environment

### Temperature<sup>[1]</sup>

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F ) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

### Relative Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

### Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

## ACCESSORIES

## Bundled Accessories

### Bundled Accessories<sup>[1]</sup>

- Lenovo® USB-C® to Ethernet Adapter (1Gbps)
- None

Notes:

[1] For more compatible accessory solutions, please visit [Accessories for ThinkPad® P16s Gen 1 \(Intel®\)](#)

## CERTIFICATIONS

## Green Certifications<sup>[1]</sup>

### Green Certifications<sup>[2]</sup>

- ENERGY STAR® 8.0
- EPEAT™ Gold Registered<sup>[3]</sup>
- RoHS compliant
- TCO Certified 9.0

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.

[2] EPEAT™ registration and ENERGY STAR® certification are dependent on system OS. Please visit [epeat.net](https://epeat.net) and [energystar.gov](https://energystar.gov) for more information.

[3] EPEAT™ is registered where applicable, please see [epeat.net](https://epeat.net) for registration status by country.

## Other Certifications

### Mil-Spec Test

MIL-STD-810H military test passed

### Other Certifications

- (Optional) TÜV Rheinland® Eye Comfort Certification
- (Optional) TÜV Rheinland® Low Blue Light

## ISV Certifications

### ISV Certifications

Please visit [ISV certifications for Lenovo® Workstations](#)

- Feature with \*\* means that only one offering listed under the feature is configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



