


OVERVIEW

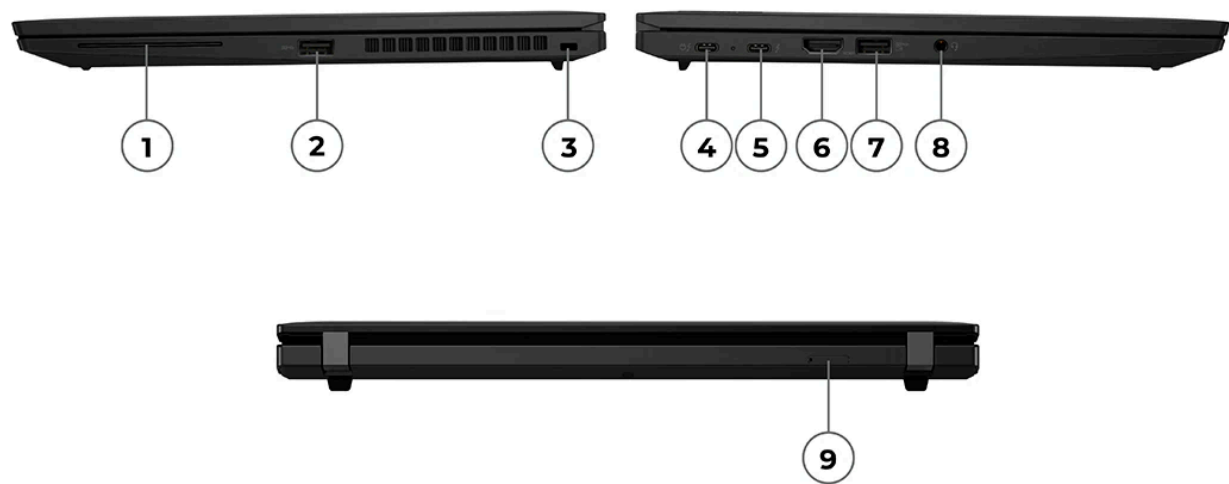

1. Smart card reader *	6. HDMI
2. USB 3.2 Gen 1	7. USB 3.2 Gen 1 (Always On)
3. Kensington Nano Security Slot	8. Headphone / microphone combo jack (3.5mm)
4. Thunderbolt 4	9. Nano-SIM card slot *
5. Thunderbolt 4	

Notes:

- Items with \* are only available on selected models

PERFORMANCE

Processor

Processor Family

13th Generation Intel® U or P Series Core™ i5 / i7 Processor

Processor\*\*[1]

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
Core™ i5-1335U	10 (2 P-core + 8 E-core)	12	P-core 1.3GHz / E-core 0.9GHz	P-core 4.6GHz / E-core 3.4GHz	12MB	Intel® Iris® Xe Graphics
Core™ i5-1340P	12 (4 P-core + 8 E-core)	16	P-core 1.9GHz / E-core 1.4GHz	P-core 4.6GHz / E-core 3.4GHz	12MB	Intel® Iris® Xe Graphics
Core™ i5-1345U	10 (2 P-core + 8 E-core)	12	P-core 1.6GHz / E-core 1.2GHz	P-core 4.7GHz / E-core 3.5GHz	12MB	Intel® Iris® Xe Graphics
Core™ i7-1355U	10 (2 P-core + 8 E-core)	12	P-core 1.7GHz / E-core 1.2GHz	P-core 5.0GHz / E-core 3.7GHz	12MB	Intel® Iris® Xe Graphics
Core™ i7-1360P	12 (4 P-core + 8 E-core)	16	P-core 2.2GHz / E-core 1.6GHz	P-core 5.0GHz / E-core 3.7GHz	18MB	Intel® Iris® Xe Graphics
Core™ i7-1365U	10 (2 P-core + 8 E-core)	12	P-core 1.8GHz / E-core 1.3GHz	P-core 5.2GHz / E-core 3.9GHz	12MB	Intel® Iris® Xe Graphics
Core™ i7-1370P	14 (6 P-core + 8 E-core)	20	P-core 1.9GHz / E-core 1.4GHz	P-core 5.2GHz / E-core 3.9GHz	24MB	Intel® Iris® Xe Graphics

Notes:

[1] Intel® P series processors are for special bid only.

Operating System

Operating System\*\*

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Windows® 11 DG Windows® 10 Pro 64
- Windows® 10 IoT Enterprise LTSC 2021[1]
- Linux[2]
- Ubuntu Linux[3]
- No preload operating system

Notes:

[1] Windows® 10 IoT Enterprise LTSC 2021 is for special bid only.

[2], [3] Some features may not be supported on the system with Linux preload, including but not limited to Intel® RST RAID, MIPI computer vision camera, WWAN, Human Presence Detection, etc.

Graphics

Graphics

Graphics	Type	Memory	Key Features
Intel® Iris® Xe Graphics	Integrated	Shared	DirectX® 12.1

Monitor Support

Monitor Support[1]

Supports up to 4 independent displays (native display and 3 external monitors via Thunderbolt™ and HDMI®)

- Thunderbolt™ supports up to 5K@60Hz
- HDMI® supports up to 4K@60Hz

Notes:

[1] Refresh rates >60hz also supported, however max resolution will be limited.

Chipset

Chipset  
Intel® SoC (System on Chip) platform

Memory

Max Memory

- 16GB soldered memory, not upgradable
- 32GB soldered memory, not upgradable

Memory Slots  
Memory soldered to systemboard, no slots, dual-channel

Memory Type  
LPDDR5x-4800<sup>[1]</sup>

Notes:

[1] Installed memory is actually 6400MHz but run at 4800MHz due to platform limitation.

Storage

Storage Support<sup>[1]</sup>  
One drive, up to 2TB M.2 2280 SSD

Storage Slot  
One M.2 2280 PCIe® 4.0 x4 slot

Storage Type\*\*

Disk Type	Interface	Offering	Security
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	256GB / 512GB / 1TB	Opal 2.0
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4 Performance	512GB / 1TB / 2TB	Opal 2.0

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.

Removable Storage

Card Reader  
No card reader

Multi-Media

Audio Chip  
High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers  
Stereo speakers, 2W x2, Dolby® Audio™

Microphone

- Dual-microphone array, 360° far-field, Dolby® Voice®
- No microphone<sup>[1]</sup>

Camera\*\*

- 5.0MP + IR discrete, with privacy shutter, fixed focus
- FHD 1080p, with privacy shutter, fixed focus
- No camera<sup>[2]</sup>

Notes:

[1] No microphone is for special bid only.

[2] No camera is for special bid only.

Battery

Battery  
Integrated Li-Polymer 57Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

Battery Life<sup>[1]</sup>

Configuration 1 (max battery life)  
MobileMark® 25: up to 12.4 hr @250nits  
JEITA 2.0: up to 24.5 hr @150nits  
Local video playback: up to 19.6 hr @150nits

Alternate configuration 2  
MobileMark® 25: up to 12.0 hr @250nits  
JEITA 2.0: up to 18.0 hr @150nits  
Local video playback: up to 16.5 hr @150nits

Alternate configuration 3  
MobileMark® 25: up to 11.2 hr @250nits  
JEITA 2.0: up to 24.1 hr @150nits  
Local video playback: up to 18.6 hr @150nits

Notes:

[1] Configuration 1 (max battery life): WUXGA low power (non-touch), Intel® i5-1335U, 16GB LPDDR5x, Win 11, 57Wh battery, best power efficiency power mode  
Alternate configuration 2: WUXGA (touch), Intel® i5-1345U, 16GB LPDDR5x, Win 11, 57Wh battery, best power efficiency power mode  
Alternate configuration 3: WUXGA low power (non-touch), Intel® i5-1340P, 16GB LPDDR5x, Win 11, 57Wh battery, best power efficiency power mode

All battery life claims are approximate maximum and based on results using [MobileMark® 25](#), JEITA 2.0, continuous 1080p local video playback (using default Media Player in Fullscreen mode with 150nits brightness and default volume level), or Google Power Load Test (PLT) battery-life benchmark tests.  
Actual battery life will vary depending on many factors such as product configuration, software, wireless functionality, power management settings, and screen brightness.  
The maximum capacity of the battery will decrease with time, ambient temperature and use.  
Refer to [Microsoft® link](#) for more information about the Windows® Performance power slider.

Power Adapter

Power Adapter\*\*<sup>[1]</sup>

- 45W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 45W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter<sup>[2]</sup>

Notes:

[1] AC adapter offerings depend on the country.  
[2] No power adapter is for special bid only.

DESIGN

Display

Display\*\*<sup>[1]</sup>

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Refresh Rate	Viewing Angle (L/R/U/D)	Key Features
14"	WUXGA (1920x1200)	None	IPS <sup>[2]</sup>	300nits	Anti-glare	16:10	600:1	45% NTSC	60Hz	85°/85°/85°/85°	-
14"	WUXGA (1920x1200)	Multi-touch	IPS <sup>[3]</sup>	300nits	Anti-glare	16:10	600:1	45% NTSC	60Hz	85°/85°/85°/85°	-
14"	WUXGA (1920x1200)	None	IPS <sup>[4]</sup>	400nits	Anti-glare	16:10	800:1	100% sRGB	60Hz	85°/85°/85°/85°	Low power, Eyesafe® Certified 2.0

14"	WUXGA (1920x1200)	Multi-touch	IPS <sup>[5]</sup>	500nits	Anti-glare	16:10	1500:1	100% sRGB	60Hz	89°/89°/89°/89°	ThinkPad® Privacy Guard
14"	2.2K (2240x1400)	None	IPS <sup>[6]</sup>	300nits	Anti-glare	16:10	1000:1	100% sRGB	60Hz	85°/85°/85°/85°	TÜV Low Blue Light Method 2
14"	2.8K (2880x1800)	None	OLED	400nits	Anti-glare, anti-reflection, anti-smudge	16:10	100,000:1	100% DCI-P3	90Hz	85°/85°/85°/85°	DisplayHDR™ True Black 500, Dolby® Vision®, Eyesafe® Certified 2.0

Touchscreen

- On-cell multi-touch, supports 10-point touch
- Non-touch

Notes:

- [1] 2.2K display is NOT available in EMEA.
- [2], [3], [4], [5], [6] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

Input Device

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls

Keyboard Backlight

LED backlight

UltraNav™

TrackPoint® pointing device and glass-like Mylar® surface multi-touch touchpad, 61 x 115 mm (2.40 x 4.53 inches)

Mechanical

Dimensions (WxDxH)<sup>[1]</sup>

317.5 x 226.9 x 16.9 mm (12.5 x 8.93 x 0.67 inches)

Weight<sup>[2]</sup>

Models	Weight
Deep black models	Starting at 1.25 kg (2.76 lbs)
Storm grey models	Starting at 1.48 kg (3.26 lbs)

Case Color\*\*

- Deep black
- Storm grey

Case Material\*\*

- Deep black models: carbon fiber hybrid (top), aluminium (bottom)
- Storm grey models: aluminium (top), aluminium (bottom)

Notes:

- [1] The system dimensions may vary depending on configurations.
- [2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

Ethernet

No onboard Ethernet<sup>[1]</sup>

WLAN + Bluetooth®

Intel® Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3<sup>[2]</sup>

#### WWAN\*\*

- Wireless WAN upgradable to 4G (with antenna ready)<sup>[3]</sup>
- Quectel EM05-G, 4G LTE CAT4, M.2 card, with embedded eSIM functionality
- Fibocom L860-GL-16, 4G LTE CAT16, M.2 card, with embedded eSIM functionality
- Fibocom FM350-GL, 5G Sub-6 GHz, M.2 Card, with embedded eSIM functionality
- No support

#### SIM Card

No physical SIM card inbox

#### NFC

- Near Field Communication
- No support

#### Notes:

[1] Ethernet support via optional Lenovo® USB-C® to Ethernet Adapter.

[2] Wi-Fi® 6E full features might be limited by country-level restrictions.

Wi-Fi® 6E is only enabled on Windows® 11 and operates as Wi-Fi® 6 with Windows® 10.

6GHz Wi-Fi® 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi® 6E, and the regional regulatory certifications & spectrum allocation.

Bluetooth® 5.3 operation requires Windows® 11. For more information please see [General Bluetooth® Support Information on Microsoft®](#).

[3] Wireless WAN upgradable to 4G is ONLY available in EMEA.

## Ports<sup>[1]</sup>

#### Standard Ports

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 2x Thunderbolt™ 4 / USB4® 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort™ 2.0)
- 1x HDMI® 2.1, up to 4K/60Hz
- 1x Headphone / microphone combo jack (3.5mm)

#### Optional Ports\*\*\*

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)

#### Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

## Docking

#### Docking

Various docking solutions supported via Thunderbolt™ / USB-C®.

For more compatible docking solutions, please visit [Docking for ThinkPad® T14s Gen 4 \(Intel®\)](#)

## SECURITY & PRIVACY

### Security

#### Security Chip

Discrete TPM 2.0, TCG certified, FIPS 140-2 certified

#### Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

**Smart Card Reader**

- Smart card reader
- No smart card reader

**Fingerprint Reader**

- Touch style fingerprint reader integrated in power button, match-on-chip
- No fingerprint reader

**BIOS Security**

- Power-on password
- Supervisor password
- System management password
- NVMe<sup>®</sup> password
- FIDO (Fast Identity Online) authentication
- Certificate based BIOS authentication
- Self-healing BIOS

**Other Security**

- (Optional) IR camera for Windows<sup>®</sup> Hello (facial recognition)
- (Optional) Camera privacy shutter
- (Optional) Privacy Guard with Privacy Alert
- Glance by Mirametrix<sup>®</sup>
- Ultrasonic Human Presence Detection (IR camera models)

## MANAGEABILITY

### System Management

**System Management**

- Intel<sup>®</sup> vPro<sup>®</sup> Enterprise<sup>[1]</sup>
- Non-vPro<sup>®</sup>

Notes:

[1] Intel<sup>®</sup> vPro<sup>®</sup> offers a superset of DASH's defined capabilities.

## SERVICE

### Warranty

**Base Warranty\*\***

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) limited onsite service
- No base warranty

## ENVIRONMENTAL

### Sustainability

**Material**

22% recycled carbon fiber hybrid or 55% recycled aluminium on top cover  
55% recycled aluminum on bottom cover  
98% PCC recycled plastic used in speaker enclosure  
97% recycled plastic used in the 57Wh battery frame  
90% PCC recycled plastic used in standard 45W and 65W adapter  
Low-temperature solder  
Standard packaging: 90% plastic free packaging  
Bulk packaging: 90% recycled and FSC certified content

### Operating Environment

**Temperature<sup>[1]</sup>**

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F ) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

**Relative Humidity**

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

**Altitude**

Maximum altitude (without pressurization): 3048 m (10,000 ft)

**Notes:**

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

## ACCESSORIES

### Bundled Accessories

**Bundled Accessories**\*\*\*[1]

- Lenovo® HDMI® to VGA Monitor Adapter
- Lenovo® USB-C® to DisplayPort™ Adapter
- Lenovo® USB-C® to Ethernet Adapter (1Gbps)
- Lenovo® USB-C® to VGA Adapter
- None

**Notes:**

[1] For more compatible accessory solutions, please visit [Accessories for ThinkPad® T14s Gen 4 \(Intel®\)](#).

## CERTIFICATIONS

### Green Certifications<sup>[1]</sup>

**Green Certifications**<sup>[2]</sup>

- ENERGY STAR® 8.0
- EPEAT™ Gold Registered<sup>[3]</sup>
- ErP Lot 6/26
- RoHS compliant
- TCO Certified 9.0

**Notes:**

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.

[2] EPEAT™ registration and ENERGY STAR® certification are dependent on system OS. Please visit [epeat.net](#) and [energystar.gov](#) for more information.

[3] EPEAT™ is registered where applicable, please see [epeat.net](#) for registration status by country.

### Other Certifications

**Mil-Spec Test**

MIL-STD-810H military test passed

**Other Certifications**

- (Optional) Intel® Evo™ Platform
- (Optional) Eyesafe® Certified 2.0
- (Optional) TÜV Rheinland® Low Blue Light Method 2

• Feature with \*\* means that only one offering listed under the feature is configured on selected models.

• Feature with \*\*\* means that one or more offerings listed under the feature could be configured on selected models.

- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

