


## OVERVIEW

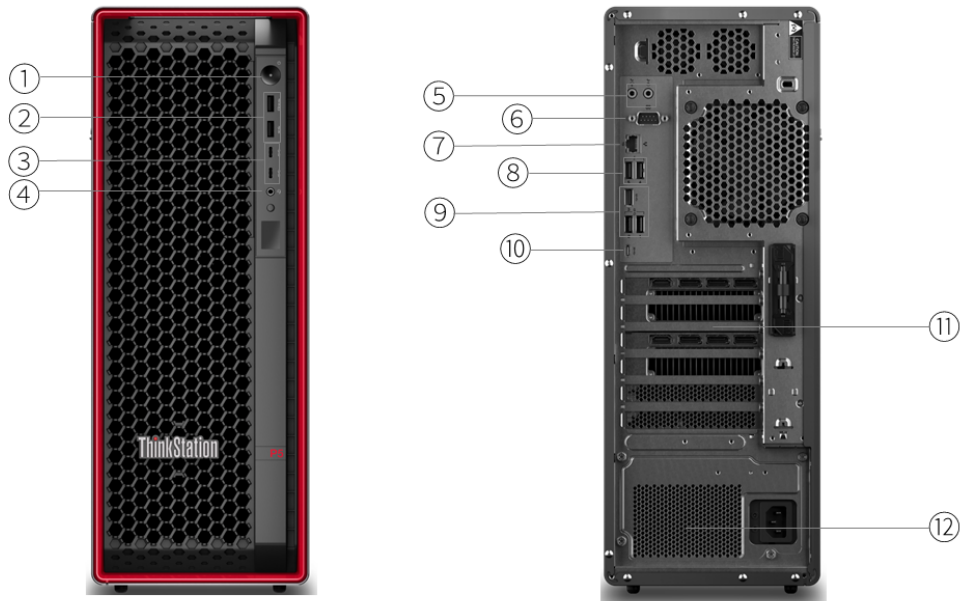

|  |  |
|--|--|
| 1. Power button                                | 7. Ethernet (GbE RJ-45)                  |
| 2. 2x USB-A (USB 10Gbps) *                     | 8. 2x USB-A (Hi-Speed USB)               |
| 3. 2x USB-C (USB 10Gbps), data transfer only * | 9. 3x USB-A (USB 10Gbps)                 |
| 4. Headphone (3.5mm)                           | 10. USB-C (USB 20Gbps / USB 3.2 Gen 2x2) |
| 5. 2x Audio ports (line-out and line-in)       | 11. PCIe slots                           |
| 6. Serial (9-pin) *                            | 12. Power supply                         |

Notes:

- Items with \* are only available on selected models
- Expansion cards are optional. More ports are available through the optional expansion cards

## PERFORMANCE

### Processor

#### Processor Family

Up to one 225W Intel® Xeon® W-2400 Series processor, supports up to 24 cores, up to 4.8GHz

#### Processor\*\*<sup>[1]</sup>

| Processor Name | Cores | Threads | Base Frequency | Max Frequency | Cache   | Memory Support |
|----------------|-------|---------|----------------|---------------|---------|----------------|
| Xeon w3-2423   | 6     | 12      | 2.1GHz         | 4.2GHz        | 15MB    | DDR5-4400      |
| Xeon w3-2425   | 6     | 12      | 3.0GHz         | 4.4GHz        | 15MB    | DDR5-4400      |
| Xeon w3-2435   | 8     | 16      | 3.1GHz         | 4.5GHz        | 22.5MB  | DDR5-4400      |
| Xeon w5-2445   | 10    | 20      | 3.1GHz         | 4.6GHz        | 26.25MB | DDR5-4800      |
| Xeon w5-2455X  | 12    | 24      | 3.2GHz         | 4.6GHz        | 30MB    | DDR5-4800      |
| Xeon w5-2465X  | 16    | 32      | 3.1GHz         | 4.7GHz        | 33.75MB | DDR5-4800      |
| Xeon w7-2475X  | 20    | 40      | 2.6GHz         | 4.8GHz        | 37.5MB  | DDR5-4800      |
| Xeon w7-2495X  | 24    | 48      | 2.5GHz         | 4.8GHz        | 45MB    | DDR5-4800      |

#### Processor Sockets

1x FCLGA4677

Notes:

[1] Intel® Max Turbo frequency will vary depending on application workload and the hardware and software configurations, see

<http://www.intel.com/technology/turboboost/> for more information.

### Operating System

#### Operating System\*\*

- Windows® 11 Pro for Workstations
- Windows® 11 DG Windows® 10 Pro 64 for Workstations
- Red Hat Enterprise Linux 9.2 (certified only, for detailed and latest information, please visit [Red Hat Certified Hardware](#))
- No preload operating system

### Graphics

#### Discrete Graphics Support<sup>[1]</sup>

Supports up to two NVIDIA® RTX 5000 Ada Generation or two NVIDIA® RTX A6000

#### Discrete Graphics Offering

| Graphics                         | Memory              | Power | Connector      | Form Factor | SLI / NVLink |
|----------------------------------|---------------------|-------|----------------|-------------|--------------|
| NVIDIA® T400 4GB                 | 4GB GDDR6           | 40W   | 3x miniDP 1.4  | Single slot | None         |
| NVIDIA® T1000 8GB                | 8GB GDDR6           | 50W   | 4x miniDP 1.4  | Single slot | None         |
| NVIDIA® RTX A2000 12GB           | 12GB GDDR6          | 70W   | 4x miniDP 1.4a | Dual slot   | None         |
| NVIDIA® RTX A4000                | 16GB GDDR6 with ECC | 140W  | 4x DP 1.4a     | Single slot | None         |
| NVIDIA® RTX A4500                | 20GB GDDR6 with ECC | 200W  | 4x DP 1.4      | Dual slot   | NVLink       |
| NVIDIA® RTX A5000                | 24GB GDDR6 with ECC | 230W  | 4x DP 1.4a     | Dual slot   | None         |
| NVIDIA® RTX A5500                | 24GB GDDR6 with ECC | 230W  | 4x DP 1.4a     | Dual slot   | NVLink       |
| NVIDIA® RTX A6000 <sup>[2]</sup> | 48GB GDDR6 with ECC | 300W  | 4x DP 1.4a     | Dual slot   | NVLink       |
| NVIDIA® RTX 4000 Ada Generation  | 20GB GDDR6 with ECC | 130W  | 4x DP 1.4a     | Single slot | -            |
| NVIDIA® RTX 4500 Ada Generation  | 24GB GDDR6 with ECC | 210W  | 4x DP 1.4a     | Dual slot   | -            |
| NVIDIA® RTX 5000 Ada Generation  | 32GB GDDR6 with ECC | 250W  | 4x DP 1.4a     | Dual slot   | -            |

Notes:

[1] Discrete graphics support may vary by configurations such as processor selection or power supply wattage.

[2] Available in specific countries and regions.

## Monitor Support

### Monitor Support

Supports multiple displays via discrete graphics, the number of maximum monitors supported depends on the graphic card in use

## Chipset

### Chipset

Intel® W790 chipset

## Memory

### Max Memory<sup>[1]</sup>

Up to 512GB (8x 64GB RDIMM)

### Memory Type<sup>[2]</sup>

DDR5-4800 RDIMM ECC

### Memory Slots

8 DDR5 DIMM slots, 4 channels capable

### Memory Protection

ECC

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

[2] System comes with DDR5-4800 memory and some configurations will run as DDR5-4400 due to platform limitations.

## Storage

### Storage Support<sup>[1][2]</sup>

Up to ten drives (3x 3.5" SATA HDD + 7x M.2 SSD)

- 3.5" HDD up to 12TB each
- M.2 SSD up to 4TB or 2TB each (see Storage Type)

### Storage Type\*\*

| Disk Type   | Interface                             | RPM  | Offering                | Security |
|---|---------------------------------------|------|-------------------------|----------|
| 3.5" SATA HDD   | SATA 6Gb/s                            | 7.2K | 2TB / 6TB / 12TB        | -        |
| M.2 2280 SSD for Onboard / Front access M.2               | PCIe® NVMe®, PCIe® 4.0 x4 Performance | -    | 512GB / 1TB / 2TB / 4TB | Opal 2.0 |
| M.2 2280 SSD for quad M.2 to PCIe® adapter <sup>[3]</sup> | PCIe® NVMe®, PCIe® 4.0 x4 Performance | -    | 512GB / 1TB / 2TB       | Opal 2.0 |

### Storage Controllers<sup>[4]</sup>

| Storage Controller            | Type     | Interface    | RAID     | Cache |
|-------------------------------|----------|--------------|----------|-------|
| Onboard Intel® RSTe SATA RAID | Standard | SATA 6.0Gb/s | 0/1/5    | None  |
| Integrated NVMe® controller   | Standard | PCIe® NVMe®  | -        | None  |
| NVMe® Basic                   | Optional | PCIe® NVMe®  | 0/1/10   | None  |
| NVMe® Premium                 | Optional | PCIe® NVMe®  | 0/1/10/5 | None  |

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.

[2] For detailed storage bays information and how to upgrade optional drives for ThinkStation® products, please visit [ThinkStation® Storage Upgrade Guide](#)

[3] M.2 2280 SSD for quad M.2 to PCIe® adapter is PCIe® 4.0 x4, and the 4x M.2 slots on quad M.2 to PCIe® adapter are PCIe® 3.0 x4. See M.2 Slots section for more information.

[4] As planned, RAID for SATA and NVMe® SSD will be available on July 2023.

## Removable Storage

### Card Reader

- 15-in-1 card reader
- No card reader

## Multi-Media

### Audio Chip

High Definition (HD) Audio, Realtek® ALC897-Q codec

### Speakers

Single speaker, 1.5W x1

## Power Supply

### Power Supply\*\*

| Power | Type  | Efficiency | Key Features                            |
|-------|-------|------------|---|
| 750W  | Fixed | 92%        | Autosensing, 80 PLUS Platinum qualified |
| 1000W | Fixed | 92%        | Autosensing, 80 PLUS Platinum qualified |

## DESIGN

### Mechanical

#### Form Factor

Tower (33L)

#### Dimensions (WxDxH)<sup>[1]</sup>

165 x 453.9 x 446 mm (6.5 x 17.9 x 17.6 inches, with feet)

#### Weight<sup>[2]</sup>

19 kg (41.9 lbs, maximum configuration)

#### Bays

Three internal disk bays plus one front access M.2 bay:

- Bay 1 supports one 3.5" HDD, standard
- Bay 2 supports one 3.5" HDD, standard
- Bay 3 supports one 3.5" HDD, optional
- Front access M.2 bay supports one M.2 SSD, optional

#### M.2 Slots

Up to 7x M.2 SSD:

- 2 via onboard slots, PCIe® 4.0 x4
- 4 via Quad M.2 to PCIe® Gen 4 adapter (4x M.2 PCIe® 4.0 x4) or Quad M.2 to PCIe® Gen 3 (PCIe® 3.0 x4) adapter
- 1 via front access M.2 bay, PCIe® 4.0 x4

#### Expansion Slots

Supports 6 PCIe® slots with 2x PCIe® 5.0 slots and 4x PCIe® 4.0 slots.

- Slot 1: PCIe® 5.0 x16, full height, full length, 75W, double-width, by CPU
- Slot 2: PCIe® 4.0 x4, full height, full length, 25W, by PCH
- Slot 3: PCIe® 5.0 x16, full height, full length, 75W, double-width, by CPU
- Slot 4: PCIe® 4.0 x4, full height, full length, 25W, by PCH
- Slot 5: PCIe® 4.0 x8, full height, full length, 25W, by CPU
- Slot 6: PCIe® 4.0 x4, full height, full length, 25W, by PCH

#### Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

## CONNECTIVITY

## Network

### Onboard Ethernet

Gigabit Ethernet, Intel® Ethernet Connection I219-LM, 1x RJ-45, supports Wake-on-LAN

### Optional Ethernet

Two additional Ethernet adapters support, up to four additional 10 GbE ports

- Gigabit Ethernet, Intel® I210-T1, 1x RJ-45, PCIe® x1
- Gigabit Ethernet, Realtek® RTL8168H, 1x RJ-45, PCIe® x1
- Gigabit Ethernet, Intel® I350-T2, 2x RJ-45, PCIe® x4
- Gigabit Ethernet, Intel® I350-T4, 4x RJ-45, PCIe® x4
- Gigabit Ethernet, Broadcom BCM5719, 4x RJ-45, PCIe® x4
- Gigabit Ethernet, Broadcom BCM5720, 2x RJ-45, PCIe® x1
- 10 Gigabit Ethernet, Intel® X550-T2, 2x RJ-45, PCIe® x4
- 10 Gigabit Ethernet, Intel® X710-DA2, 2x SFP+, PCIe® x8

### WLAN + Bluetooth®

- Intel® Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.1 (Bluetooth® 5.3 hardware ready), Intel® vPro® technology support<sup>[1]</sup>
- No WLAN and Bluetooth®

Notes:

[1] Bluetooth® 5.3 is hardware ready but may run at a lower version due to OS limitations. Wi-Fi® 6E is only enabled on Windows® 11 and operates as Wi-Fi® 6 with Windows® 10.

## Ports<sup>[1]</sup>

### Front Ports

1x headphone / microphone combo jack (3.5mm)

### Optional Front Ports

- 2x USB-C® (USB 10Gbps / USB 3.2 Gen 2), data transfer only
- 2x USB-A (USB 10Gbps / USB 3.2 Gen 2), one Always On

### Rear Ports<sup>[2]</sup>

- 1x USB-C® (USB 20Gbps / USB 3.2 Gen 2x2), data transfer only
- 2x USB-A (Hi-Speed USB / USB 2.0)
- 3x USB-A (USB 10Gbps / USB 3.2 Gen 2)
- 1x Ethernet (GbE RJ-45)
- 1x line-in (3.5mm)
- 1x line-out (3.5mm)

### Optional Rear Ports

- 1x Thunderbolt™ 4 (via additional PCIe® adapter)
- 1x serial
- 2x PS/2

Notes:

[1] The transfer speed of the ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes, and other factors related to system configuration and your operating environment, will be slower than the theoretical speed.

[2] For video ports on discrete graphics, please see graphics section.

## SECURITY & PRIVACY

### Security

#### Security Chip

Discrete TPM 2.0, TCG certified, FIPS 140-2 certified

#### Physical Locks

- (Optional) Access panel lock kit with common key
- (Optional) Access panel lock kit with unique key
- Kensington® Security Slot™, 3 x 7 mm

#### Chassis Intrusion Switch

Chassis intrusion switch

#### BIOS Security

- Administrator password
- Power-on password
- UEFI Secure Boot
- Self-healing BIOS

## MANAGEABILITY

### System Management

#### System Management<sup>[1]</sup>

Intel® vPro® Enterprise with Intel® AMT 16

Notes:

[1] Intel® vPro® offers a superset of DASH's defined capabilities.

### Diagnostic

#### Diagnostic

- ThinkStation® Diagnostics
- Front diagnostic panel with QR code

## SERVICE

### Warranty<sup>[1]</sup>

#### Base Warranty\*\*

- 1-year limited onsite service
- 2-year limited onsite service
- 3-year limited onsite service

Notes:

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

## OPERATING REQUIREMENTS

### Operating Environment

#### Temperature

- Operating: 10°C (50°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

#### Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

#### Relative Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

## CERTIFICATIONS

### Green Certifications<sup>[1]</sup>

#### Green Certifications

- (Optional) ENERGY STAR® 8.0
- (Optional) EPEAT™ Gold Registered
- (Optional) TCO Certified 9.0
- RoHS compliant

---

**Notes:**

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

## ISV Certifications

### ISV Certifications

Please visit [ISV certifications for Lenovo® Workstations](#)

- Feature with \*\* means that only one offering listed under the feature is configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

