


OVERVIEW

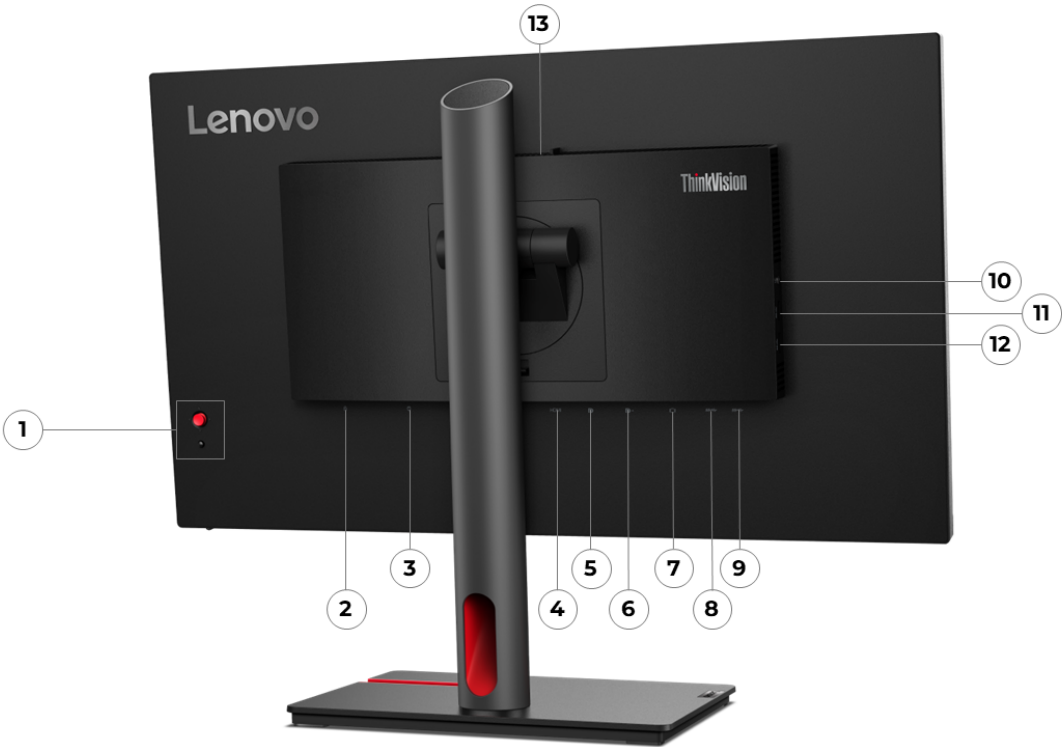

1. Main menu button	8. USB-B (USB 5Gbps)
2. Kensington Security Slot	9. USB-A (USB 5Gbps)
3. AC Power-in	10. Audio line-out (3.5mm)
4. HDMI 2.1 TMDS	11. USB-A (USB 5Gbps)
5. DisplayPort 1.4 (HBR2)	12. USB-A (USB 5Gbps)
6. DisplayPort 1.4 out	13. USB-A (USB 5Gbps)
7. VGA	

PERFORMANCE

Panel

Panel

In-Plane Switching (IPS)

Backlight

WLED

Display Size

24.5 inches

Max View Area

- Active Area: 543.7 x 302.6 mm
- Screen Dimension: 552.5 x 319.6 mm

Resolution

1920 x 1080

Aspect Ratio

16:9

Pixel Pitch

0.2802 x 0.2802 mm

Dot / Pixel Per Inch

89.9 dpi

Brightness

Typical: 250 cd/m²

Contrast Ratio

Contrast Ratio: 1300:1

View Angle (H / V)

Horizontal: 178°, Vertical: 178°

Response Time

- Extreme Mode: 4 ms
- Normal Mode: 6 ms

Refresh Rate

48Hz - 100Hz

Color Gamut

- 99% sRGB
- 83% DCI-P3
- 99% Rec.709

Color Support

16.7 Million

Screen Surface Treatment

Anti-glare

Curvature

Flat Panel

Operating System

Operating System

- Windows® 11 Support
- Windows® 10 Support

Multi-Media

Camera

Optional Modular Camera Support

Speakers

Optional Modular Soundbar support

Power Supply

Power Consumption

- Typical / Max: 12.5W / 52W
- Sleep / Off mode: <0.5W
- Switch-off Mode: <0.3W
- Energy Star Power On: 11.9W
- Energy Star TEC: 38.2kWh
- Internal Power Supply

Voltage Required

AC 100 to 240 V (50-60Hz)

Special Features

Special Features

- Lenovo® ThinkColour (Lenovo® Accessories and Display Manager) Support
Lenovo® ThinkColour supports Windows® 10 & 11, Mac OS, and Windows® On Arm (functions vary across systems).
Lenovo® Accessories and Display Manager is formerly Lenovo® Display Control Center.
- Natural Low Blue Light

DESIGN

Mechanical

ThinkCentre® M Series Support

ThinkCentre® M Series Tiny Support
For supporting Tiny devices, additional Tiny Clamp Bracket Mounting Kit III (PN: 4XF1K72399) is needed (sold separately).

Bezel Width

- Side: 17.6mm
- Top / Bottom: 2mm / 2mm

Buttons

- Joystick
- Power button
- Source Key

Cable Management

Support

Case Color

Raven black

Dimensions (WxDxH)^[1]

Models	Dimensions
Lowest Position	557.3 x 199.7 x 356.8 mm (21.94 x 7.86 x 14.05 inches)
Highest Position	557.3 x 199.7 x 511.8 mm (21.94 x 7.86 x 20.15 inches)
Head Only	557.3 x 49 x 328.5 mm (21.94 x 1.93 x 12.93 inches)

Packaging Dimensions (WxDxH)

730 x 160 x 422 mm (28.74 x 6.30 x 16.61 inches)

Weight^[2]

Models	Weight
Monitor With Stand	5.4 kg (11.9 lbs)
Monitor Head Only	3.4 kg (7.5 lbs)

Packaging Weight

8.4 kg (18.52 lbs)

Mounting

Supports VESA mount 100 x 100 mm

Stand

Supports -5° to +23.5° tilt, left & right 45° swivel, -90° to +90° pivot, up to 155mm lift

In the Box

- Monitor with stand
- 1x DP cable (1.8m) (Available in US/Canada/Brazil/LAS/AP-Japan/AP-India/ASEAN/HK/Korea/Taiwan/India/AP-China CN/EMEA. Not available in AP-China CB.)
- 1x HDMI® cable (1.8m) (Available in US/Canada/Brazil/AP-China CB. Not available in LAS/AP-Japan/AP-India/ASEAN/HK/Korea/Taiwan/India/AP-China CN/EMEA.)
- 1x USB-B to USB-A cable (1.8m)
- 1x Power cable (1.8m)
- Quick setup guide

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Ports^[1]

Rear Ports^[2]

- 4x USB-A (USB 5Gbps / USB 3.2 Gen 1), 1x BC1.2, USB downstream
- 1x USB-B (USB 5Gbps / USB 3.2 Gen 1), USB upstream
- 1x HDMI® 2.1 TMDS, supports 1920x1080@120Hz
- 1x DisplayPort™ 1.4 (HBR2)
- 1x DisplayPort™ 1.4 (Out)
- 1x VGA
- 1x audio-out (3.5mm)

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

Thunderbolt™ 5: 80 Gbit/s (bidirectional), up to 120 Gbit/s in bandwidth boost mode for video-intensive applications.

[2] Supports 1920x1080@100 Hz as specified in HDMI® 2.1

SECURITY & PRIVACY

Security

Physical Locks

Kensington® Security Slot™ (2.5 mm x 6 mm and 3 mm x 7 mm)

SERVICE

Warranty

Base Warranty

3-year limited warranty

OPERATING REQUIREMENTS

Operating Environment

Temperature

Operating: 0°C to 40°C (32°F to 104°F)
Storage: -20°C to 60°C (-4°F to 140°F)
Transport: -20°C to 60°C (-4°F to 140°F)

Relative Humidity

Operating: 10% to 80% non-condensing
Storage: 5% to 95% non-condensing
Transport: 5% to 95% non-condensing

CERTIFICATIONS

Green Certifications^[1]

Green Certifications

- ENERGY STAR® Certified
- EPEAT™ Gold Registered
- EU Energy Label (D-class)
- TCO Certified 9.0
- TCO edge 2.0

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

Other Certifications

Other Certifications

- Eyesafe® Certified 2.0
- TÜV Rheinland® Eye Comfort Certification
- TÜV Rheinland® Flicker Free
- TÜV Rheinland® Low Blue Light
- TÜV Rheinland® Low Blue Light (Hardware Solution)

- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

