

THINKVISION P24h

INTUITIVE DESIGN FOR COMFORTABLE WORKING


Lenovo



UNIFYING SIMPLICITY AND AESTHETICS

An immersive visual experience and enhanced productivity are what you get when using the ThinkVision P24h-2L. Its 23.8-inch display comes with QHD resolution, In-Plane Switching (IPS), and 3-side NearEdgeless bezels. This monitor offers versatile connectivity options for seamless collaboration in a multiscreen setup. Smart Power function¹ intelligently detects overall power consumption and dynamically manages power delivery. With **Natural Low Blue Light technology** built in, this monitor doesn't compromise on color performance or picture quality while reducing harmful blue light.

FEATURES OF THINKVISION P24h-2L

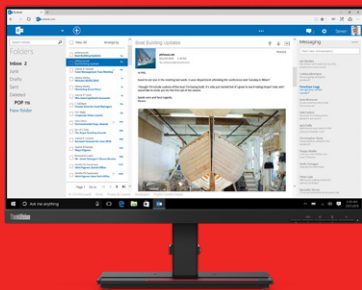


Astonishing Display

With 1.77 times the pixels than Full-HD in the 3-side NearEdgeless IPS panel, the monitor's QHD resolution offers more screen real estate to carry out everyday tasks with clarity and ease. The ThinkVision P24h-2L is factory calibrated (avg. Delta E<2) to deliver the truest view of original content. 99% sRGB, 99% BT.709, and 83% DCI-P3 color gamuts ensure color consistency throughout, delivering vibrant and striking image quality. Lenovo exclusive ThinkColour software² lets you effortlessly adjust advanced display settings using the mouse, enhancing efficiency and user experience.



Performance at Its Best

The ThinkVision P24h-2L, a USB-C³ Hub monitor offers a one-cable solution that simultaneously transmits power, video, audio, and data. Create a multi-monitor setup with its daisy-chaining functionality for seamless multitasking. Built-in speakers with immersive audio enhance collaboration. Smart Power¹ technology intelligently distributes power supply while optimizing overall power consumption.

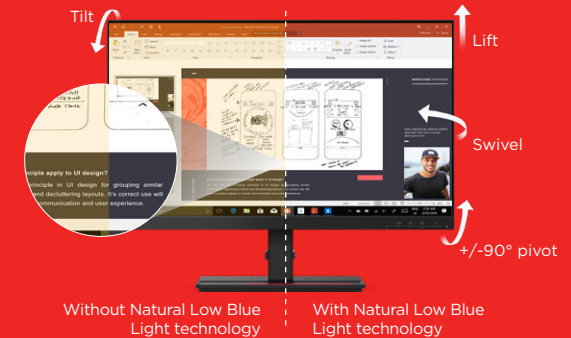

Enhanced User Experience

Customize the ThinkVision P24h-2L for maximum comfort with its tilt, lift, pivot, and swivel functionality. Keep your desk clutter-free with the cable management system, small square base, and integrated phone holder. This monitor has flexible VESA mounting options so you can install it on a wall or over a desk. Equipped with ThinkColour Software,² this monitor lets you adjust display settings using the mouse in OSD, offering a better user experience. This TÜV Rheinland Eye Comfort-certified monitor possesses **Natural Low Blue Light technology** that maintains color performance while allowing you to work effortlessly without worrying about eye fatigue.

ThinkVision P24h-2L

DISPLAY

Panel Size
23.8-inch

Screen Dimensions
535 mm x 313 mm

Panel Type
3-side NearEdgeless
In-Plane Switching

Active Area
526.85 mm x 296.35 mm

Backlight
WLED

Aspect Ratio
16:9

Resolution
2560 x 1440

Pixel Pitch
0.2058 x 0.2058 mm

Dot/Pixel Per Inch (DPI/PPI)
123

Viewing Angle (H x V @ CR 10:1)
178° / 178°

Response Time
4ms (Extreme Mode)
6ms (Normal Mode)

Refresh Rate
60 Hz

Brightness (typical)
300 cd/m²

Contrast Ratio (typical)
1000:1

Dynamic Contrast Ratio (typical)
3M:1

Color Gamut
99% sRGB, 99% BT.709,
83% DCI-P3

Color Support (typical)
16.7 Million

Anti-glare
Yes

CONNECTIVITY

Video Signal
1 x USB Type-C³ Gen1
(DP1.2 Alt Mode)
1 x HDMI 1.4
1 x DP 1.2
1 x DP 1.2 (Out)

Audio Signal
1 x Audio Out (3.5 mm)

USB Hub
Yes

Ethernet
Yes

USB Upstream
1 x USB 3.2 Gen1
(by USB Type-C Gen1)

USB Downstream
4 x USB 3.2 Gen1 (1 x BC1.2)

MULTI-MEDIA

Optional Soundbar Support
Yes (PN 0A36190)

SPECIAL FEATURES

Software
Lenovo ThinkColour (Lenovo
Display Control Center)²

POWER

Power Consumption (typ./max.)
23W / 132W

**Power Consumption
Sleep/Off Mode**
≤ 0.5W

**Power Consumption
Switch-off Mode**
≤ 0.3W

**ENERGY STAR Power
Consumption (P_{on}/E_{TEC})**
18.1W / 57.4kWh

Power Supply
Internal

**USB Type-C Power
Delivery (W)**
up to 75 W⁴

Smart Power¹
Yes

Voltage Required
AC 100 to 240 V (47-63 Hz)

MECHANICAL

Tilt Angle (front/back)
-5° / 35°

Swivel Angle (left/right)
+45° / -45°

Lift (Max range)
150 mm

Pivot
-90° / 90°

VESA Mount Capability
Yes (100 x 100 mm)

**ThinkCentre M Series
Tiny Support**
Yes, by Tiny/Nano monitor
clamp II (PN: 4XHOZ42451)
and Tiny VESA mount II
(PN: 4XF0N03161)

**ThinkCentre M Series
Nano Support**
Yes, by Tiny/Nano monitor
clamp II (PN: 4XHOZ42451)
and Nano VESA mount (PN:
4XF0V81630)

Kensington Lock Slot
Yes

Cable Management
Yes

Bezel Color
Raven Black

Bezel Width (side)
2.0 mm

Bezel Width (top/bottom)
2.0 mm / 21.4 mm

DIMENSION

**Size Packed (D x H x W,
mm/inch)**
620.0 x 423.0 x 149.0 mm
24.40 x 16.70 x 5.90 inches

**Size Unpacked w/ Stand
(D x H x W, mm/inch)
(lowest position)**
205.0 x 420.0 x 539.80 mm
8.07 x 16.53 x 21.25 inches

**Size Unpacked w/ Stand
(D x H x W, mm/inch)
(highest position)**
205.0 x 570.0 x 539.8 mm
8.07 x 22.44 x 21.25 inches

**Size Unpacked w/o Stand
(head only) (D x H x W, mm/inch)**
46.6 x 325.7 x 539.8 mm
1.83 x 12.82 x 21.25 inches

Weight Packed (kg/lbs.)
8.46 kg / 18.65 lbs.

Weight Unpacked (kg/lbs.)
6.39 kg / 14.09 lbs.

**Weight (monitor head only)
(kg/lbs.)**
4.10 kg / 9.04 lbs.

WHAT'S IN THE BOX

Monitor with stand
1 x Power cable (1.8 m)
1 x DP cable (1.8 m)
(US & Canada only)
1 x USB Type-C to Type-C cable
(1.8 m)
1 x USB Type-C to Type-A cable
(1.8 m) (US & Canada only)
Factory calibration report
Quick setup guide

CERTIFICATION

ENERGY STAR Rating
8.0

CCC
Yes

TCO
8.0

TCO Edge
2.0

EPEAT
Silver

RoHS (EU 2002/95/EC)
Yes

Windows Certification
Windows 7, Windows 10

China Energy Efficiency Standard
Tier 1

TÜV Rheinland Eye Comfort
Yes

**TÜV Low Blue Light
(Hardware Solution)**
Yes

Eyesafe Display Certification
Yes



¹The Smart Power function intelligently detects overall power consumption and dynamically manages the power delivery to each device.

²This software can only be used with Windows 10

³USB Type-C* and USB-C* are registered trademarks of USB Implementers Forum.

⁴Up to 75 W power delivery to compatible devices by USB Type-C. Listed as maximum capacity of power delivery. Actual capacity of power delivery may vary depending upon devices connected or monitor configuration, and may decline with downstream USB ports connected or higher brightness setting.

Depending on many factors such as the processing capability of peripheral devices, file attributes, and other factors related to system configuration and operating environments, the actual transfer rate using the various USB connectors on this device will vary and is typically slower than the data rates as defined by the respective USB specifications: - 5 Gbit/s for USB 3.1 Gen1; 10 Gbit/s for USB 3.1 Gen2 & 20 Gbit/s for USB 3.2.

© 2021 Lenovo. All rights reserved. These products are available while supplies last. Prices shown are subject to change without notice. For any questions concerning price, please contact your Lenovo Account Executive. Lenovo is not responsible for photographic or typographic errors. Warranty: For a copy of applicable warranties, write to: Warranty Information, 500 Park Offices Drive, RTP, NC 27709, Attn: Dept. ZPYA/B600. Lenovo makes no representation or warranty regarding third-party products or services. Trademarks: Lenovo, the Lenovo logo, Rescue and Recovery, ThinkPad, ThinkCentre, ThinkStation, ThinkVantage, and ThinkVision are trademarks or registered trademarks of Lenovo. Microsoft, Windows, and Vista are registered trademarks of Microsoft Corporation. Intel, the Intel logo, Intel Inside, Intel Core, and Core Inside are trademarks of Intel Corporation in the U.S. and/or other countries. Other company, product, and service names may be trademarks or service marks of others.

Specifications may vary depending upon region.