


OVERVIEW

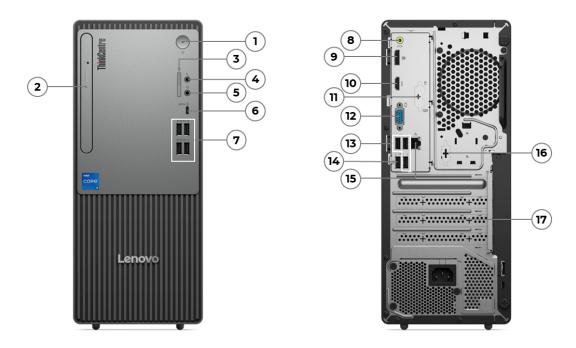

1. Power button	10. HDMI 2.1 TMDS
2. Optical drive *	11. 2x PS/2 ports (keyboard / mouse) *
3. Card reader *	12. VGA
4. Microphone jack (3.5mm)	13. 3x USB-A (Hi-Speed USB)
5. Headphone / microphone combo jack (3.5mm)	14. USB-A (Hi-Speed USB), with Smart Power On
6. USB-C (USB 5Gbps), data transfer only	15. Ethernet (RJ-45)
7. 4x USB-A (USB 5Gbps)	16. Serial *
8. Audio-out (3.5mm)	17. Optional ports on expansion cards *
9. DisplayPort 1.4a (HBR2)	

Notes:

• Items with * are only available on selected models



PERFORMANCE

Processor

Processor Family

13th / 14th Generation Intel $^{\circ}$ Core $^{\text{TM}}$ i3 / i5 / i7 Processor, or Intel $^{\circ}$ 300 Processor

Processor

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
Core i3- 13100	4 (4 P-core + 0 E-core)	8	P-core 3.4GHz	P-core 4.5GHz	12MB	Intel® UHD Graphics 730
Core i5- 13400	10 (6 P-core + 4 E-core)	16	P-core 2.5GHz / E-core 1.8GHz	P-core 4.6GHz / E-core 3.3GHz	20MB	Intel® UHD Graphics 730
Core i7- 13700	16 (8 P-core + 8 E-core)	24	P-core 2.1GHz / E-core 1.5GHz	Max Turbo up to 5.2GHz / P-core 5.1GHz / E-core 4.1GHz	зомв	Intel® UHD Graphics 770
Core i3- 14100	4 (4 P-core + 0 E-core)	8	P-core 3.5GHz	P-core 4.7GHz	5MB L2 Cache / 12MB Intel® Smart Cache	Intel® UHD Graphics 730
Core i5- 14400	10 (6 P-core + 4 E-core)	16	P-core 2.5GHz / E-core 1.8GHz	P-core 4.7GHz / E-core 3.5GHz	9.5MB L2 Cache / 20MB Intel® Smart Cache	Intel® UHD Graphics 730
Core i5- 14400F	10 (6 P-core + 4 E-core)	16	P-core 2.5GHz / E-core 1.8GHz	P-core 4.7GHz / E-core 3.5GHz	9.5MB L2 Cache / 20MB Intel® Smart Cache	-
Core i5- 14500	14 (6 P-core + 8 E-core)	20	P-core 2.6GHz / E-core 1.9GHz	P-core 5.0GHz / E-core 3.7GHz	11.5MB L2 Cache / 24MB Intel® Smart Cache	Intel® UHD Graphics 770
Core i7- 14700	20 (8 P-core + 12 E-core)	28	P-core 2.1GHz / E-core 1.5GHz	Max Turbo up to 5.4GHz / P-core 5.3GHz / E-core 4.2GHz	28MB L2 Cache / 33MB Intel® Smart Cache	Intel® UHD Graphics 770
Intel® 300	2 (2 P-core + 0 E-core)	4	P-core 3.9GHz	-	6MB	Intel® UHD Graphics 710

Operating System

Operating System**

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Windows® 11 DG Windows® 10 Pro 64
- Ubuntu Linux
- No preload operating system

Graphics

Graphics***[1]

Graphics	Туре	Memory	Max Resolution	Connector	Key Features
Intel® UHD graphics 710	Integrated	Shared	4096x2160@30Hz(HDMI®), 2048x1536@50Hz(VGA), 4096x2304@60Hz(DP)	1x HDMI® 2.1 TMDS, 1x VGA, 1x DP 1.4a HBR2	DirectX® 12, OpenGL 4.5
Intel® UHD graphics 730	Integrated	Shared	4096x2160@30Hz(HDMI®), 2048x1536@50Hz(VGA), 4096x2304@60Hz(DP)	1x HDMI® 2.1 TMDS, 1x VGA, 1x DP 1.4a HBR2	DirectX® 12, OpenGL 4.5
Intel® UHD graphics 770	Integrated	Shared	4096x2160@30Hz(HDMI®), 2048x1536@50Hz(VGA), 4096x2304@60Hz(DP)	1x HDMI® 2.1 TMDS, 1x VGA, 1x DP 1.4a HBR2	DirectX® 12, OpenGL 4.5
Intel® Arc™	Discrete	4GB	5120x2880@60Hz(DP)	2x DisplayPort™ 1.4a	DirectX® 12,

ThinkCentre neo 50t Gen 5



A310 LP	GDDR6		OpenGL 4.6
Graphics			

Notes:

[1] The information of integrated graphics are not applicable for the models with processor which has no integrated graphics inside (for the details, please refer to processor section).

Monitor Support

Monitor Support

Supports up to 3 independent displays via (HDMI®, DP and VGA), more displays support via discrete graphics

Chipset

Chipset

Intel® B760 chipset

Memory

Max Memory[1]

Up to 64GB DDR5-5600[2]

Memory Slots

Two DDR5 UDIMM slots, dual-channel capable

Memory Type

- DDR5-4800
- DDR5-5200
- DDR5-5600

Memory Protection

Non-ECC

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

[2] 64GB memory is special bid only

Storage

Max Storage Support[1]

Up to three drives, 1x 3.5"HDD + 1x 2.5"HDD + 1x M.2 SSD

- 3.5" HDD up to 2TB
- M.2 SSD up to 1TB
- 2.5" HDD bay is only for customer self upgrade[2]

Storage Type

Disk Type	Interface	RPM	Security
3.5" SATA HDD	SATA 6Gb/s	7.2K	-
M.2 2280 SSD	PCle® NVMe®, PCle® 4.0 x4	-	-
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	-	Opal 2.0

RAID

No support

Notes:

[1] The max capacity of each disk type is based on the test results with current Lenovo® storage offerings.

[2] 2.5" HDD bay is optional part, only for customer self upgrade purpose and the hard drive is sold separately. Two onboard SATA ports support up to two drives of 2.5" HDD, 3.5" HDD and ODD.

Removable Storage

Optical**

- DVD-ROM, SATA 1.5Gb/s, slim (9.0mm)
- DVD burner (DVD±RW), SATA 1.5Gb/s, slim (9.0mm)



None

Card Reader

- 3-in-1 card reader (SD, SDHC, SDXC)
- · No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC623-CG codec

Speakers

- No speakers
- Single speaker, 2W x1

Power Supply

Power Supply**

Power	Туре	Efficiency	Key Features
180W	Fixed	85%	100-240V, 50-60Hz
260W ^[1]	Fixed	90%	100-240V, 50-60Hz
310W	Fixed	92%	100-240V, 50-60Hz
380W	Fixed	92%	100-240V, 50-60Hz

Notes:

[1] Hybrid PSU sources configured for supply assurance; assembled product has maximum wattage of 258W.

DESIGN

Input Device

Keyboard**

- Lenovo® Calliope Keyboard (USB connector), black
- Lenovo® Traditional Keyboard (USB connector), black
- · No keyboard

Mouse

- Lenovo® Calliope Mouse (USB connector), black
- No mouse

Mechanical

Form Factor

Tower (13.6L)

Dimensions (WxDxH)[1]

145 x 294 x 340 mm (5.71x 11.57 x 13.39 inches)

Packaging Dimensions (WxDxH)

240 x 395 x 530 mm (9.45 x 15.55 x 20.87 inches)

Weight^[2]

Around 5.6 kg (12.35 lbs)

Packaging Weight

Around 7 kg (15.43 lbs)

Case Color

Luna grey (front bezel), raven black (chassis)

Rave[3]

- 1x 2.5" disk bay (optional)
- 1x 3.5" disk bay
- 1x slim ODD bay

Expansion Slots

ThinkCentre neo 50t Gen 5



- One PCle® 3.0 x16, full-height, length ≤ 233.6mm, height ≤ 117.5mm
- One PCle® 3.0 x1, full-height, (length ≤ 185mm, height ≤ 100mm) or (length ≤ 118mm, height ≤ 110mm)
- Two M.2 slots (one for WLAN, one for SSD)

FOU

(Optional) toolless chassis open (toolless chassis screw required)

Cooling System (Fan & Cooler)

(Optional) 1x rear system fan

Others

Supports Smart Power On

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

[3] 2.5" HDD bay is optional part, only for customer self upgrade purpose and the hard drive is sold separately. Two onboard SATA ports support up to two drives of 2.5" HDD, 3.5" HDD and ODD.

CONNECTIVITY

Network

WLAN + Bluetooth®**

- Realtek® Wi-Fi® 6 RTL8852BE, 802.11ax Dual Band 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 card
- Intel® Wi-Fi® 6 AX201, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.2, M.2 card
- No WLAN and Bluetooth®

Onboard Ethernet

Gigabit Ethernet, Realtek® RTL8111K, 1x RJ-45, supports Wake-on-LAN

Optional Ethernet

No optional Ethernet

Ports¹¹

Front Ports

- 1x USB-C® (USB 5Gbps / USB 3.2 Gen 1), with data transfer and 15W charging
- 4x USB-A (USB 5Gbps / USB 3.2 Gen 1)
- 1x headphone / microphone combo jack (3.5mm)
- 1x microphone (3.5mm)

Rear Ports[2]

- 4x USB-A (Hi-Speed USB / USB 2.0), one supports Smart Power On
- 1x HDMI® 2.1 TMDS
- 1x DisplayPort™ 1.4a (HBR2)
- 1x VGA
- 1x Ethernet (RJ-45)
- 1x line-out (3.5mm)

Optional Rear Ports

- 1x parallel
- 2x serial
- 2x PS/2

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;



Thunderbolt™ 3/4: 40 Gbit/s.

Thunderbolt $^{\text{\tiny T}}$ 5: 80 Gbit/s (bidirectional), up to 120 Gbit/s in bandwidth boost mode for video-intensive applications.

[2] For video ports on discrete graphics, please see graphics section

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

- (Optional) Smart Cable Clip
- Kensington® Security Slot™
- Padlock Loop

Chassis Intrusion Switch

- · Chassis intrusion switch
- · No chassis intrusion switch

BIOS Security

- Administrator password
- Hard disk password
- · Power-on password
- Absolute persistence module
- Boot sequence control
- · Boot without keyboard and mouse
- · Cover tamper detected
- · Configuration change detection
- Individual USB port disablement
- Intel® BIOS guard
- · Never crash Self-healing
- Secure wipe
- Secure boot
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- More BIOS security features, please visit <u>BIOS Simulator</u>[1]

Notes:

[1] The BIOS simulator is just for reference. Default settings and some options may vary depending on the hardware, operating system and BIOS version.

MANAGEABILITY

System Management

System Management[1]

None

Notes:

[1] Intel® vPro® offers a superset of DASH's defined capabilities.

SERVICE

Warranty^[1]

Base Warranty**

- 1-year courier or carry-in service
- 1-year limited onsite service

Notos

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to https://smartfind.lenovo.com/. To learn more details of



warranty policy, please access https://support.lenovo.com/warrantylookup/warrantypolicy.

ACCESSORIES

Bundled Accessories

Bundled Accessories

- DP to DVI donale
- Smart Cable (USB-A to USB-C®)
- None

OPERATING REQUIREMENTS

Operating Environment

Temperature

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Relative Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

ENVIRONMENTAL

Sustainability

Material

85% PCC ABS used in the chassis 95% PCC recycled plastic used in USB keyboard/mouse 90% PIC recycled plastic EPE cushion 30% OBP used in the device bag FSC certified carton

CERTIFICATIONS

Green Certifications¹¹

Green Certifications

- (Optional) ENERGY STAR® 8.0
- (Optional) EPEAT™ Silver Registered
- (Optional) EPEAT™ Gold Registered
- RoHS / WEEE / REACH
- TCO Certified 9.0

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit https://compliance.lenovo.com.

Other Certifications

Other Certifications

(Optional) TÜV Rheinland® Ultra Low Noise

- Feature with ** means that only one option listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Feature with *** means that one or more options listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.

ThinkCentre neo 50t Gen 5



- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not
 responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS,"
 WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES
 OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow
 disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to
 you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice













