


## OVERVIEW

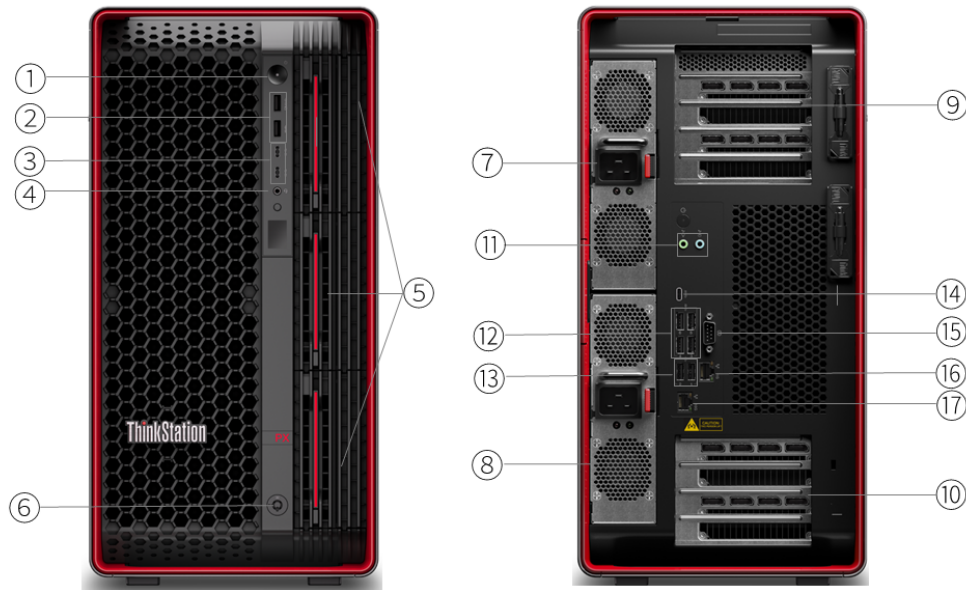

1. Power button	10. PCIe slots 6-9 (top to bottom, by CPU 1)
2. 2x USB-A (USB 10Gbps) *	11. 2x Audio ports (line-out and line-in)
3. 2x USB-C (USB 10Gbps), data transfer only *	12. 4x USB-A (USB 5Gbps)
4. Headphone jack (3.5mm)	13. 2x USB-A (Hi-Speed USB)
5. Front storage bays (HDD or M.2 SSD) *	14. USB-C (USB 20Gbps / USB 3.2 Gen 2x2)
6. Lock for front storage bays *	15. Serial (9-pin) *
7. Power supply 2 *	16. Ethernet (GbE RJ-45)
8. Power supply 1 or rear storage bay *	17. Ethernet (10GbE RJ-45)
9. PCIe slots 1-5 (top to bottom, by CPU 2) *	

Notes:

- Items with \* are only available on selected models
- Expansion cards are optional. More ports are available through the optional expansion cards

## PERFORMANCE

### Processor

#### Processor Family

Up to two 5th or 4th Gen Intel® Xeon® Scalable processors.

- Up to 128 cores (64 cores per processor)
- Core speeds of up to 3.9 GHz
- Cache up to 320MB

#### Processor\*\*<sup>[1]</sup>

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support
Xeon Silver 4510	12	24	2.4GHz	4.1GHz	30MB	DDR5-4400 1DPC and 2DPC
Xeon Silver 4410T	10	20	2.7GHz	4.0GHz	26.25MB	DDR5-4000 1DPC and 2DPC
Xeon Silver 4410Y	12	24	2.0GHz	3.9GHz	30MB	DDR5-4000 1DPC and 2DPC
Xeon Silver 4416+	20	40	2.0GHz	3.9GHz	37.5MB	DDR5-4000 1DPC and 2DPC
Xeon Gold 5416S	16	32	2.0GHz	4.0GHz	30MB	DDR5-4400 1DPC and 2DPC
Xeon Gold 5418Y	24	48	2.0GHz	3.8GHz	45MB	DDR5-4400 1DPC and 2DPC
Xeon Gold 5420+	28	56	2.0GHz	4.1GHz	52.5MB	DDR5-4400 1DPC and 2DPC
Xeon Gold 5415+	8	16	2.9GHz	4.1GHz	22.5MB	DDR5-4400 1DPC and 2DPC
Xeon Gold 6534	8	16	3.9GHz	4.2GHz	22.5MB	DDR5-4800 1DPC
Xeon Gold 6544Y	16	32	3.6GHz	4.1GHz	45MB	DDR5-5200 1DPC
Xeon Gold 6548Y+	32	64	2.5GHz	4.1GHz	60MB	DDR5-5200 1DPC
Xeon Gold 6542Y	24	48	2.9GHz	4.1GHz	60MB	DDR5-5200 1DPC
Xeon Gold 6526Y	16	32	2.8GHz	3.9GHz	37.5MB	DDR5-5200 1DPC
Xeon Gold 6530	32	64	2.1GHz	4.0GHz	160MB	DDR5-4800 1DPC
Xeon Gold 6444Y	16	32	3.6GHz	4.0GHz	45MB	DDR5-4800 1DPC, DDR5-4400 2DPC
Xeon Gold 6430	32	64	2.1GHz	3.4GHz	60MB	DDR5-4400 1DPC and 2DPC
Xeon Gold 6438Y+	32	64	2.0GHz	4.0GHz	60MB	DDR5-4800 1DPC, DDR5-4400 2DPC
Xeon Gold 6442Y	24	48	2.6GHz	4.0GHz	60MB	DDR5-4800 1DPC, DDR5-4400 2DPC
Xeon Gold 6416H	18	36	2.2GHz	4.2GHz	45MB	DDR5-4800 1DPC, DDR5-4400 2DPC
Xeon Gold 6418H	24	48	2.1GHz	4.0GHz	60MB	DDR5-4800 1DPC, DDR5-4400 2DPC
Xeon Platinum 8592+	64	128	1.9GHz	3.9GHz	320MB	DDR5-5600 1DPC
Xeon Platinum 8580	60	120	2.0GHz	4.0GHz	300MB	DDR5-5600 1DPC
Xeon Platinum 8568Y+	48	96	2.3GHz	4.0GHz	300MB	DDR5-5600 1DPC
Xeon Platinum 8570	56	112	2.1GHz	4.0GHz	300MB	DDR5-5600 1DPC
Xeon Platinum 8452Y	36	72	2.0GHz	3.2GHz	67.5MB	DDR5-4800 1DPC, DDR5-4400 2DPC
Xeon Platinum 8460Y+	40	80	2.0GHz	3.7GHz	105MB	DDR5-4800 1DPC, DDR5-4400 2DPC
Xeon Platinum 8468	48	96	2.1GHz	3.8GHz	105MB	DDR5-4800 1DPC, DDR5-4400 2DPC
Xeon Platinum 8470	52	104	2.0GHz	3.8GHz	105MB	DDR5-4800 1DPC, DDR5-4400 2DPC
Xeon Platinum 8480+	56	112	2.0GHz	3.8GHz	105MB	DDR5-4800 1DPC, DDR5-4400 2DPC
Xeon Platinum 8490H	60	120	1.9GHz	3.5GHz	112.5MB	DDR5-4800 1DPC, DDR5-4400 2DPC

#### Processor Sockets

2x FCLGA4677

Notes:

[1] Intel® Max Turbo frequency will vary depending on application workload and the hardware and software configurations, see

<http://www.intel.com/technology/turboboost/> for more information.

## Operating System

### Operating System\*\*

- Windows® 11 Pro for Workstations
- Windows® 11 DG Windows® 10 Pro 64 for Workstations
- Red Hat Enterprise Linux 9.2 (certified only, for detailed and latest information, please visit [Red Hat Certified Hardware](#))
- No preload operating system

## Graphics

### Discrete Graphics Support<sup>[1]</sup>

Supports up to four NVIDIA® RTX 6000 Ada Generation

### Discrete Graphics Offering

Graphics	Memory	Power	Connector	Form Factor	SLI / NVLink
NVIDIA® RTX A1000	8GB GDDR6	50W	4x miniDP 1.4a	Single slot	None
NVIDIA® T400 4GB	4GB GDDR6	40W	3x miniDP 1.4	Single slot	None
NVIDIA® T1000 8GB	8GB GDDR6	50W	4x miniDP 1.4	Single slot	None
NVIDIA® RTX A2000 12GB	12GB GDDR6	70W	4x miniDP 1.4a	Dual slot	None
NVIDIA® RTX A4000	16GB GDDR6 with ECC	140W	4x DP 1.4a	Single slot	None
NVIDIA® RTX A4500	20GB GDDR6 with ECC	200W	4x DP 1.4	Dual slot	NVLink
NVIDIA® RTX A5000	24GB GDDR6 with ECC	230W	4x DP 1.4a	Dual slot	None
NVIDIA® RTX A5500	24GB GDDR6 with ECC	230W	4x DP 1.4a	Dual slot	NVLink
NVIDIA® RTX A6000 <sup>[2]</sup>	48GB GDDR6 with ECC	300W	4x DP 1.4a	Dual slot	NVLink
NVIDIA® RTX 2000 Ada Generation	16GB GDDR6	70W	4x miniDP 1.4a	Dual slot	None
NVIDIA® RTX 4000 Ada Generation	20GB GDDR6 with ECC	130W	4x DP 1.4a	Single slot	-
NVIDIA® RTX 4500 Ada Generation	24GB GDDR6 with ECC	210W	4x DP 1.4a	Dual slot	-
NVIDIA® RTX 5000 Ada Generation	32GB GDDR6 with ECC	250W	4x DP 1.4a	Dual slot	-
NVIDIA® RTX 6000 Ada Generation <sup>[3]</sup>	48GB GDDR6 with ECC	300W	4x DP 1.4a	Dual slot	-

Notes:

[1] Discrete graphics support may vary by configurations such as processor selection or power supply wattage.

[2], [3] Available in specific countries and regions.

## Monitor Support

### Monitor Support

Supports multiple displays via discrete graphics, the number of maximum monitors supported depends on the graphic card in use

## Chipset

### Chipset

Intel® C741 chipset

## Memory

### Max Memory<sup>[1]</sup>

Up to 2TB (16x 128GB 3DS-RDIMMs and dual processor)

### Memory Type\*\*<sup>[2]</sup>

- DDR5-4800 3DS-RDIMM ECC, maximum transfer speeds of up to 4800 MT/s
- DDR5-4800 RDIMM ECC, maximum transfer speeds of up to 4800 MT/s
- DDR5-5600 RDIMM ECC, maximum transfer speeds of up to 5600 MT/s

### Memory Slots

16 DDR5 DIMM slots, 16 channels capable (8 DIMM slots with 8 channels per processor)

### Memory Protection

## ECC

## Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

[2] The processor determines the actual speed of the memory, thus the memory may actually work at a speed such as 5200MT/s, 4800MT/s, 4400MT/s, or lower.

## Storage

### Storage Support<sup>[1]</sup>

Up to seven drives (4x 3.5" SATA HDD + 3x M.2 SSD) or 9 drives (2x 3.5" SATA HDD + 7x M.2 SSD)

- 3.5" HDD supports hot-swap
- 3.5" HDD up to 12TB each
- M.2 SSD up to 4TB each

### Storage Type<sup>\*\*\*</sup>

Disk Type	Interface	RPM	Offering	Security
3.5" SATA HDD	SATA 6Gb/s	7.2K	2TB / 4TB / 6TB / 8TB / 10TB / 12TB	-
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4 Performance	-	512GB / 1TB / 2TB / 4TB	Opal 2.0

### Storage Controllers

Storage Controller	Type	Interface	RAID	Cache
Onboard Intel® RSTe SATA RAID	Standard	SATA 6.0Gb/s	0/1/10/5	None
Integrated NVMe® controller	Standard	PCIe® NVMe®	-	None
NVMe® Basic	Optional	PCIe® NVMe®	0/1/10	None
NVMe® Premium	Optional	PCIe® NVMe®	0/1/10/5	None

## Notes:

[1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.

## Removable Storage

### Card Reader

No card reader

## Multi-Media

### Audio Chip

High Definition (HD) Audio, Realtek® ALC897-Q codec

### Speakers

Single speaker, 1.5W x1

## Power Supply

### Power Supply<sup>[1]</sup>

Power	Type	Efficiency	Key Features
1850W	Hot-swap	92%	Up to two power supplies, autosensing, 80 PLUS Platinum qualified, team or redundant mode support with two power supplies, up to 2350W configuration under team mode

## Notes:

[1] Countries with input voltage under 111V, output power limited to 1500 watts.

## DESIGN

## Mechanical

### Form Factor

Tower (54L) or 5U rack, optional rack rail kit needed

### Dimensions (WxDxH)<sup>[1]</sup>

220 x 575 x 440.4mm (8.7 x 22.6 x 17.3 inches, with feet)

**Weight<sup>[2]</sup>**

35.6 kg (78.5 lbs, maximum configuration)

**Bays**

Three front disk bays and one rear disk bay:

- Front bay 1 supports one 3.5" hot-swap HDD, standard
- Front bay 2 supports one 3.5" hot-swap HDD, standard; or two M.2 SSD via optional front access M.2 bay
- Front bay 3 supports one 3.5" hot-swap HDD, standard; or two M.2 SSD via optional front access M.2 bay
- Rear bay supports one 3.5" hot-swap HDD, optional, occupies 1st PSU cage

**Expansion Slots**

Supports up to 9 PCIe<sup>®</sup> slots with 4 PCIe<sup>®</sup> 5.0 slots and 5 PCIe<sup>®</sup> 4.0 slots, slots 1-5 require 2nd CPU installed.

- Slot 1: PCIe<sup>®</sup> 4.0 x16, full height, full length, 75W, by CPU 2
- Slot 2: PCIe<sup>®</sup> 4.0 x16, full height, full length, 75W, by CPU 2
- Slot 3: PCIe<sup>®</sup> 5.0 x16, full height, full length, 75W, by CPU 2
- Slot 4: PCIe<sup>®</sup> 5.0 x16, full height, full length, 75W, by CPU 2
- Slot 5: PCIe<sup>®</sup> 4.0 x8, full height, full length, 25W, by CPU 2
- Slot 6: PCIe<sup>®</sup> 5.0 x16, full height, full length, 75W, by CPU 1
- Slot 7: PCIe<sup>®</sup> 4.0 x16, full height, full length, 75W, by CPU 1
- Slot 8: PCIe<sup>®</sup> 5.0 x16, full height, full length, 75W, by CPU 1
- Slot 9: PCIe<sup>®</sup> 4.0 x16, full height, full length, 75W, by CPU 1

**Notes:**

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo<sup>®</sup> lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

## CONNECTIVITY

### Network

**Onboard Ethernet**

Two Ethernet, GbE + 10GbE, Intel<sup>®</sup> Ethernet Connection I219-LM and Marvell AQtion AQC-113C, 2x RJ-45, supports Wake-on-LAN

**Optional Ethernet**

Two additional Ethernet adapters support, up to four additional 25GbE ports

- Gigabit Ethernet, Intel<sup>®</sup> I210-T1, 1x RJ-45, PCIe<sup>®</sup> x1
- Gigabit Ethernet, Intel<sup>®</sup> I350-T2, 2x RJ-45, PCIe<sup>®</sup> x4
- Gigabit Ethernet, Intel<sup>®</sup> I350-T4, 4x RJ-45, PCIe<sup>®</sup> x4
- Gigabit Ethernet, Broadcom BCM5719, 4x RJ-45, PCIe<sup>®</sup> x4
- Gigabit Ethernet, Broadcom BCM5720, 2x RJ-45, PCIe<sup>®</sup> x1
- Gigabit Ethernet, Realtek<sup>®</sup> RTL8168H, 1x RJ-45, PCIe<sup>®</sup> x1
- 25 Gigabit Ethernet, NVIDIA<sup>®</sup> Mellanox ConnectX-6, 2x SFP28, PCIe<sup>®</sup> x8

**WLAN + Bluetooth<sup>®</sup>**

- Intel<sup>®</sup> Wi-Fi<sup>®</sup> 6E AX210, 802.11ax 2x2 Wi-Fi<sup>®</sup> + Bluetooth<sup>®</sup> 5.1 (Bluetooth<sup>®</sup> 5.3 hardware ready), Intel<sup>®</sup> vPro<sup>®</sup> technology support<sup>[1]</sup>
- No WLAN and Bluetooth<sup>®</sup>

**Notes:**

[1] Bluetooth<sup>®</sup> 5.3 is hardware ready but may run at a lower version due to OS limitations. Wi-Fi<sup>®</sup> 6E is only enabled on Windows<sup>®</sup> 11 and operates as Wi-Fi<sup>®</sup> 6 with Windows<sup>®</sup> 10.

### Ports<sup>[1]</sup>

**Front Ports**

1x headphone / microphone combo jack (3.5mm)

**Optional Front Ports**

- 2x USB-C<sup>®</sup> (USB 10Gbps / USB 3.2 Gen 2), data transfer only
- 2x USB-A (USB 10Gbps / USB 3.2 Gen 2), one Always On

**Rear Ports<sup>[2]</sup>**

- 1x USB-C® (USB 20Gbps / USB 3.2 Gen 2x2), data transfer only
- 2x USB-A (Hi-Speed USB / USB 2.0)
- 4x USB-A (USB 5Gbps / USB 3.2 Gen 1)
- 1x Ethernet (10GbE RJ-45)
- 1x Ethernet (GbE RJ-45)
- 1x line-in (3.5mm)
- 1x line-out (3.5mm)

**Optional Rear Ports**

- 1x Thunderbolt™ 4 (via additional PCIe® adapter)
- 1x serial
- 2x PS/2

## Notes:

[1] The transfer speed of the ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes, and other factors related to system configuration and your operating environment, will be slower than the theoretical speed.

[2] For video ports on discrete graphics, please see graphics section.

## SECURITY & PRIVACY

### Security

**Security Chip**

Discrete TPM 2.0, TCG certified, FIPS 140-2 certified

**Physical Locks**

- (Optional) Access panel lock kit with common key
- (Optional) Front storage bay lock with common key
- Kensington® Security Slot™, 3 x 7 mm

**Chassis Intrusion Switch**

Chassis intrusion switch

**BIOS Security**

- Administrator password
- Power-on password
- Self-healing BIOS
- UEFI Secure Boot

## MANAGEABILITY

### System Management

**System Management<sup>[1]</sup>**

- (Optional) Aspeed AST2600 graphics / management processor, IPMI 2.0-compliant baseboard management controller (BMC)
- Intel® vPro® Enterprise with Intel® AMT 16

## Notes:

[1] Intel® vPro® offers a superset of DASH's defined capabilities.

### Diagnostic

**Diagnostic**

- ThinkStation® Diagnostics
- Front Diagnostic Panel with QR code

## SERVICE

### Warranty<sup>[1]</sup>

**Base Warranty\*\***

- 1-year limited onsite service

- 2-year limited onsite service
- 3-year limited onsite service
- No base warranty

---

**Notes:**

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://support.lenovo.com/warrantylookup/warrantypolicy>.

## OPERATING REQUIREMENTS

### Operating Environment

#### Temperature

- Operating: 10°C (50°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

#### Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

#### Relative Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

## ENVIRONMENTAL

### Sustainability

#### Material<sup>[1]</sup>

- 65% PCC ABS bezel
- 95% PCC ABS wired USB keyboard/mouse top/bottom cover
- 90% PIC recycled plastic EPE cushion
- 30% OBP used in bag
- FSC certified paper in packaging

---

**Notes:**

[1] PCC: Post Consumer Content, recycled materials from customers.  
PIC: Post Industry Content, recycled materials from internal factories.  
EPE: Expanded Polyethylene.  
OBP: Ocean Bound Plastic, reducing plastic spill into the sea.  
FSC: Forest Stewardship Council.

## CERTIFICATIONS

### Green Certifications<sup>[1]</sup>

#### Green Certifications

- (Optional) ENERGY STAR® 8.0
- (Optional) EPEAT™ Gold Registered
- RoHS compliant

---

**Notes:**

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

### ISV Certifications

#### ISV Certifications

Please visit [ISV certifications for Lenovo® Workstations](#)

- Feature with \*\* means that only one option listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.

- Feature with \*\*\* means that one or more options listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



