


OVERVIEW

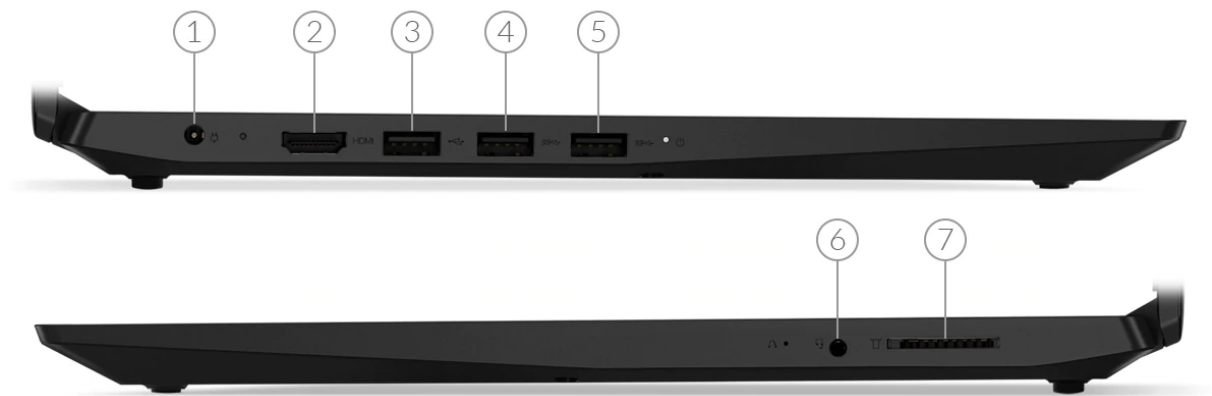

1. Power connector	5. USB 3.1 Gen 1
2. HDMI 1.4b	6. Headphone / microphone combo jack (3.5mm)
3. USB 2.0	7. Card reader
4. USB 3.1 Gen 1	

PERFORMANCE

Processor

Processor Family

10th Generation Intel® Core™ i3 / i5 / i7 Processor

Monitor Support

Monitor Support

Supports up to 2 independent displays via native display and 1 external monitor; supports external monitor via HDMI® (up to 4096x2160@24Hz)

Memory

Memory Slots

One memory soldered to systemboard, one DDR4 SO-DIMM slot

Memory Type

DDR4-2666

Storage

Storage Support

Up to two drives, 1x 2.5" HDD + 1x M.2 2242/2280 SSD

- 2.5" HDD up to 2TB
- M.2 2242 SSD up to 512GB
- M.2 2280 SSD up to 512GB
- Optional Intel Optane™ Memory integrated with SSD, M.2

Storage Type

Disk Type	Interface	RPM	Security
2.5" SATA HDD	SATA 6Gb/s	5.4K	-
M.2 2242 SSD	PCIe NVMe, PCIe 3.0 x2	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	-
Intel Optane Memory with Solid State Storage, M.2 2280	PCIe NVMe, PCIe 3.0 x4	-	-

Multi-Media

Audio Chip

High Definition (HD) Audio

Speakers

Stereo speakers, 1.5W x2, Dolby® Audio™

DESIGN

Input Device

Keyboard

6-row, multimedia Fn keys, numeric keypad

Touchpad

Buttonless Mylar® surface multi-touch touchpad

Mechanical

Dimensions (WxDxH)

362.2 x 251.5 x 19.9 mm (14.26 x 9.9 x 0.78 inches)

Weight^[1]

1.85 kg (4.1 lbs)

Notes:

1. The system weight varies depending on configurations

CONNECTIVITY

Network

Onboard Ethernet

No Ethernet

Ports^[1]

Standard Ports^[2]

- 1x USB 2.0
- 2x USB 3.2 Gen 1
- 1x HDMI 1.4b
- 1x card reader
- 1x headphone / microphone combo jack (3.5mm)
- 1x power connector

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt™ 3: 40 Gbit/s;
FireWire 400: 400 Mbit/s;
FireWire 800: 800 Mbit/s
2. Depending on many factors, actual data transfer speed may be lower than theoretical speed

SECURITY & PRIVACY

Security

BIOS Security

- Supervisor password
- Power-on password
- Hard disk password

ENVIRONMENTAL

Operating Environment

Temperature^[1]

- At altitudes up to 2438 m (8,000 ft)
 - Operating: 5°C to 35°C (41°F to 95°F)
 - Storage: 5°C to 43°C (41°F to 109°F)
- At altitudes above 2438 m (8,000 ft)
 - Maximum temperature when operating under the unpressurized condition: 31.3°C (88°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F)

CERTIFICATIONS

Green Certifications

Green Certifications



- ErP Lot 3
- RoHS compliant

