


OVERVIEW

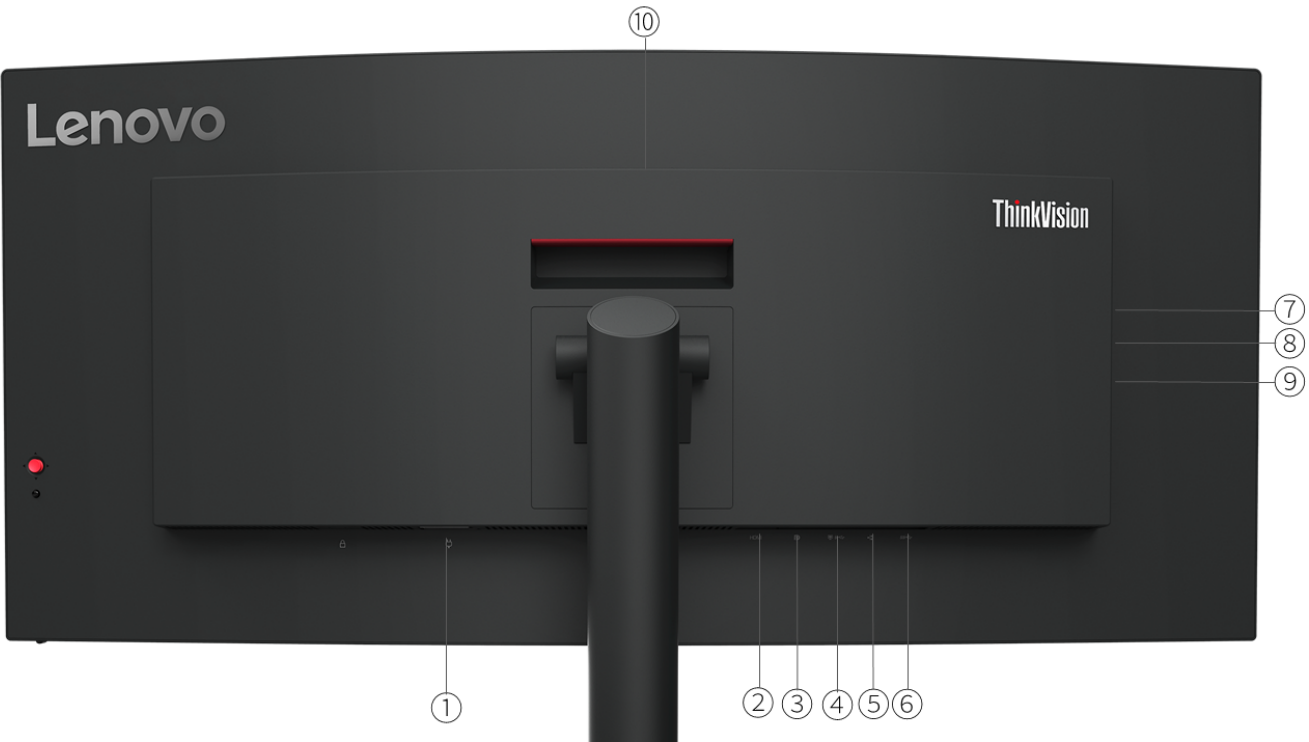

1. Power connector	6. USB 3.2 Gen 1
2. HDMI 2.1 TMDS	7. Audio-out (3.5mm)
3. DisplayPort 1.4 (HBR2)	8. USB 3.2 Gen 1
4. USB-C 3.2 Gen 1 (DP 1.4 Alt Mode)	9. USB 3.2 Gen 1
5. Ethernet (RJ-45)	10. USB 3.2 Gen 1

## PERFORMANCE

### Panel

**Panel**

3-side NearEdgeless, VA

**Backlight**

WLED

**Display Size**

34 inches

**Max View Area**

- Active Area: 792.2 x 333.7 mm
- Screen Dimension: 803.2 x 357.9 mm

**Resolution**

3440 x 1440

**Aspect Ratio**

21:9

**Pixel Pitch**

0.232 x 0.232 mm

**Dot / Pixel Per Inch**

110 dpi

**Brightness**

350 cd/m<sup>2</sup>

**Contrast Ratio**

- Contrast Ratio: 3000:1
- Dynamic Contrast Ratio (Typical): 3000000:1

**View Angle (H / V)**

Horizontal: 178°, Vertical: 178°

**Response Time**

- Extreme Mode: 4 ms
- Normal Mode: 6 ms

**Refresh Rate**

60Hz

**Color Gamut**

99% sRGB

**Color Support**

16.7 Million

**Color Depth**

8-bit

**Screen Surface Treatment**

Anti-glare

**Curvature**

1500R

### Operating System

**Operating System**

- Windows® 11 Support
- Windows® 10 Support

### Multi-Media

**Camera**

- ThinkVision® VoIP Stack MC60 monitor webcam (Some models only)
- No bundled webcam (Support ThinkVision® VoIP Stack MC60 Monitor Webcam, sold separately)

Speakers

Optional Modular Soundbar support (MS30 Monitor Soundbar)

Power Supply

Power Consumption

- Typical / Max: 31W / 130W
- Sleep / Off mode: <0.5W
- Switch-off Mode: <0.3W
- Energy Star Power On: 30W
- Energy Star TEC: 93kWh
- Internal Power Supply

Voltage Required

AC 100 to 240 V (50-60Hz)

Special Features

Special Features

- Lenovo® ThinkColour (Lenovo® Accessories and Display Manager) Support  
Lenovo® ThinkColour supports Windows® 10 & 11, Mac OS, and Windows® On Arm (functions vary across systems).  
Lenovo® Accessories and Display Manager is formerly Lenovo® Display Control Center.
- Natural Low Blue Light
- Smart Power  
The Smart Power function intelligently detects overall power consumption and dynamically manages the power delivery to each device

DESIGN

Mechanical

ThinkCentre® M Series Support

ThinkCentre® M Series Tiny Support  
For supporting Tiny devices, additional Tiny Clamp Bracket Mounting Kit III (PN: 4XF1K72399) is needed (sold separately).

Bezel Width

- Side: 2.1mm
- Top / Bottom: 2.1mm / 22.8mm

Cable Management

Support

Case Color

Raven black

Dimensions (WxDxH)<sup>[1]</sup>

Models	Dimensions
Head Only	808.4 x 110.1 x 367.5 mm (31.83 x 4.33 x 14.47 inches)
Lowest Position	808.4 x 231.6 x 414.3 mm (31.83 x 9.12 x 16.31 inches)
Highest Position	808.4 x 231.6 x 569.3 mm (31.83 x 9.12 x 22.41 inches)

Packaging Dimensions (WxDxH)

1070 x 525 x 187 mm (42.13 x 20.67 x 7.36 inches)

Weight<sup>[2]</sup>

Models	Weight
Monitor With Stand	9.5 kg (20.94 lbs)
Monitor Head Only	7.0 kg (15.43 lbs)

Packaging Weight

14.8 kg (32.63 lbs)

Mounting

Supports VESA mount 100mm

Stand

Supports -5° to +23.5° tilt, left & right 45° swivel, up to 155mm lift

#### In the Box

- Monitor with stand
- 1x DP cable (1.8m) (PRC Workstations only)
- 1x USB-C® to USB-C® cable (1.8m)
- 1x Power cable (1.8m)
- Quick setup guide
- Warranty booklet

#### Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

## CONNECTIVITY

### Network

#### Ethernet

Support 10M / 100M / 1000M

### Ports<sup>[1]</sup>

#### Rear Ports<sup>[2]</sup>

- 1x USB-C® 3.2 Gen 1 (DP 1.4 Alt Mode and up to 75W PD), USB upstream
- 4x USB 3.2 Gen 1 (1x BC 1.2), USB downstream
- 1x HDMI® 2.1 TMDS, supports 3440x1440@60Hz
- 1x DisplayPort™ 1.4 (HBR2)
- 1x Ethernet (RJ-45)
- 1x Power Connector
- 1x audio-out (3.5mm)

#### Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

Thunderbolt™ 5: 80 Gbit/s (bidirectional), up to 120 Gbit/s in bandwidth boost mode for video-intensive applications.

[2] Up to 75W power delivery to compatible devices by USB-C®. Listed as maximum capacity of power delivery. Actual capacity of power delivery may vary depending upon devices connected or monitor configuration, and may decline with downstream USB ports connected or higher brightness setting.

## SECURITY & PRIVACY

### Security

#### Physical Locks

Kensington® Security Slot™ (2.5 mm x 6 mm and 3 mm x 7 mm)

## SERVICE

### Warranty

#### Base Warranty

3-year limited warranty

## OPERATING REQUIREMENTS

### Operating Environment

#### Temperature

Operating: 0°C to 40°C (32°F to 104°F)

Storage: -20°C to 60°C (-4°F to 140°F)

Transport: -20°C to 60°C (-4°F to 140°F)

#### Relative Humidity

Operating: 10% to 80% non-condensing

Storage: 5% to 95% non-condensing

Transport: 5% to 95% non-condensing

## CERTIFICATIONS

### Green Certifications<sup>[1]</sup>

#### Green Certifications

- ENERGY STAR® Certified
- EPEAT™ Gold Registered<sup>[2]</sup>
- RoHS compliant
- TCO Certified 9.0
- TCO edge 2.0
- Volatile Organic Compound Certification

#### Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2] EPEAT™ is registered where applicable, please visit [epeat.net](https://epeat.net) for registration status by country.

### Other Certifications

#### Other Certifications

- Eyesafe® Certified 2.0
  - TÜV Rheinland® Eye Comfort Certification
  - TÜV Rheinland® Low Blue Light (Hardware Solution)
- 
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
  - The specifications on this page may not be available in all regions, and may be changed or updated without notice.

