


OVERVIEW

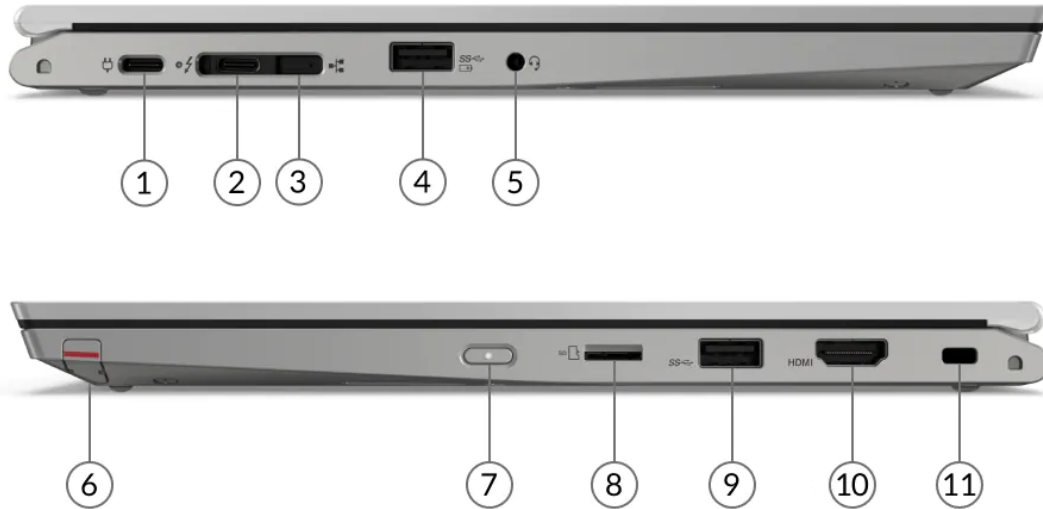

1. USB-C 3.2 Gen 2	7. Power button
2. Thunderbolt 4	8. microSD card reader
3. Ethernet extension connector (mini RJ-45) *	9. USB 3.2 Gen 1
4. USB 3.2 Gen 1 (Always On)	10. HDMI 2.0
5. Headphone / microphone combo jack (3.5mm)	11. Kensington Security Slot
6. Pen slot *	

Notes:

- Items with * are only available on selected models
- Optional smart card reader on the front side (not shown on the sample product above)
- The combination of 2 and 3 is side docking connector

PERFORMANCE

Processor

Processor Family

11th Generation Intel® Core™ i3 / i5 / i7 Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
Core i3-1115G4	2	4	3.0GHz	4.1GHz	6MB	Intel UHD Graphics
Core i5-1135G7	4	8	2.4GHz	4.2GHz	8MB	Intel Iris® Xe Graphics
Core i5-1145G7	4	8	2.6GHz	4.4GHz	8MB	Intel Iris Xe Graphics
Core i7-1165G7	4	8	2.8GHz	4.7GHz	12MB	Intel Iris Xe Graphics
Core i7-1185G7	4	8	3.0GHz	4.8GHz	12MB	Intel Iris Xe Graphics

Operating System

Operating System**

- Ubuntu Linux^[1]
- Windows® 10 Home 64
- Windows 10 Home 64 Single Language
- Windows 10 Pro 64
- Windows 11 DG Windows 10 Pro 64
- Windows 11 Home
- Windows 11 Home Single Language
- Windows 11 Pro
- No operating system

Notes:

[1] Some features may not be supported on the system with Linux preload, including but not limited to Intel RST RAID, MIPI computer vision camera, WWAN, Human Presence Detection, etc.

Graphics

Graphics**

Graphics	Type	Memory	Key Features
Intel UHD Graphics	Integrated	Shared	DirectX® 12.1
Intel Iris Xe Graphics	Integrated	Shared	DirectX 12.1

Monitor Support

Monitor Support

Supports up to 4 independent displays (native display and 3 external monitors via HDMI®, USB-C® and Thunderbolt™)

- HDMI supports up to 3840x2160@60Hz
- USB-C supports up to 5120x3200@60Hz
- Thunderbolt supports up to 5120x3200@60Hz

Chipset

Chipset

Intel SoC (System on Chip) platform

Memory

Max Memory

- 4GB soldered memory, not upgradable
- 8GB soldered memory, not upgradable
- 16GB soldered memory, not upgradable

Memory Slots**

- Memory soldered to systemboard, no slots, single-channel (4GB models)
- Memory soldered to systemboard, no slots, dual-channel (8GB or 16GB models)

ThinkPad L13 Yoga Gen 2 (Intel)

Memory Type

DDR4-3200

Storage

Storage Support^[1]

One drive, up to 512GB M.2 2242 SSD or 1TB M.2 2280 SSD

Storage Type**

Disk Type	Interface	Security
M.2 2242 SSD	PCIe® NVMe®, PCIe 3.0 x2	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	Opal 2.0

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.

Removable Storage

Optical

None

Card Reader

microSD card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Synaptic® CX11880 codec

Speakers

Stereo speakers, 2W x2, Dolby® Audio™ Premium

Microphone

Dual-microphone array

Camera**

- Front HD 720p, with privacy shutter, fixed focus
- Front HD 720p + IR hybrid, with privacy shutter, fixed focus
- Front HD 720p, with privacy shutter, fixed focus; rear 5.0-megapixel, autofocus^[1]
- Front HD 720p + IR hybrid, with privacy shutter, fixed focus; rear 5.0-megapixel, autofocus^[2]

Notes:

[1], [2] Rear camera is selectable for fingerprint reader model only.

Sensor

Sensors

Accelerometer (G) sensor

Battery

Battery

Integrated Li-Polymer 46Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

Max Battery Life^[1]

MobileMark® 2014: 10.36 hr

MobileMark 2018: 8.36 hr

JEITA 2.0: 10.3 hr

Notes:

[1] All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, MobileMark 25, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary depending on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter**^[1]

- 45W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 45W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz

Notes:

^[1] AC adapter offerings depend on the country.

DESIGN

Display

Display

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle (L/R/U/D)
13.3"	FHD (1920x1080)	Multi-touch	IPS ^[1]	300nits	Anti-reflection, anti-smudge	16:9	800:1	72% NTSC	85°/85°/-/-

Touchscreen

Capacitive-type multi-touch, supports 10-point touch

Notes:

^[1] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

Multi-mode

Multi-mode

Laptop, tent, stand, and tablet modes supported by 360° hinge

Input Device

Pen

- ThinkPad® Pen Pro - 8, with built-in rechargeable battery, 4096 levels of pressure sensitivity, on-board garaged and rechargeable
- No pen^[1]

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls

Keyboard Backlight

- LED backlight
- Non-backlight

UltraNav™

TrackPoint® pointing device and Mylar® surface multi-touch touchpad

Notes:

^[1] Customer needs to purchase an external pen separately.

Mechanical

Dimensions (WxDxH)^[1]

311.5 x 219 x 17.6 mm (12.26 x 8.62 x 0.69 inches)

Weight^[2]

Starting at 1.44 kg (3.17 lbs)

Case Color**

- Black
- Silver

Case Material

Aluminium (top), GFRP (bottom)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY**Network****Ethernet****

- Gigabit Ethernet, Intel Ethernet Connection I219-V (non-vPro® models), mini RJ-45 to RJ-45 via optional ThinkPad Ethernet Extension Adapter Gen 2 or Lenovo USB-C to Ethernet Adapter
- Gigabit Ethernet, Intel Ethernet Connection I219-LM (vPro models), mini RJ-45 to RJ-45 via optional ThinkPad Ethernet Extension Adapter Gen 2 or Lenovo USB-C to Ethernet Adapter
- No onboard Ethernet

WLAN + Bluetooth®**

- Intel Wireless-AC 9560, 802.11ac Dual Band 2x2 Wi-Fi® + Bluetooth 5.1, M.2 card
- Intel Wi-Fi 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, M.2 Card^[1]

WWAN

No support

SIM Card

No physical SIM card inbox

NFC

No support

Notes:

[1] Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitations. Wi-Fi 6 full features might be limited by country-level restrictions.

Ports^[1]**Standard Ports**

- 1x HDMI 2.0
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Thunderbolt 4 / USB4® 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4)
- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 1x USB-C 3.2 Gen 2 (support data transfer, Power Delivery and DisplayPort 1.2)
- 1x microSD card reader

Optional Ports*^[2]**

- 1x Ethernet extension connector (mini RJ-45)
- 1x Side docking connector (Ethernet models only)
- 1x Smart card reader

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt 3/4: 40 Gbit/s.

[2] Ethernet and side docking connector are coexisting. On some models, both of them are equipped. On some models,

neither of them is equipped.

If your computer has Ethernet icon, it supports wired Ethernet connection with ThinkPad Ethernet Extension Adapter or ThinkPad Basic/Pro/Ultra Docking Station.

If your computer does not have Ethernet icon, the Ethernet connector does not support Ethernet connection. We recommend you use the Lenovo USB-C to Ethernet Adapter for Ethernet connection.

Docking

Docking

Various docking solutions supported via side docking connector (optional), Thunderbolt or USB-C. For more compatible docking solutions, please visit [Docking for ThinkPad L13 Yoga® Gen 2 \(Intel\)](#)

Monitor Cable

Monitor Cable***

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to VGA Adapter
- Lenovo USB-C to HDMI Adapter
- Lenovo USB-C to DisplayPort Adapter
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

Kensington® Security Slot™, 3 x 7 mm

Smart Card Reader

- Smart card reader
- No smart card reader

Fingerprint Reader

- Touch style fingerprint reader on palm rest, match-on-chip
- No fingerprint reader

BIOS Security

- Power-on password
- Supervisor password
- Hard disk password
- Self-healing BIOS

Other Security

- ThinkShutter camera cover
- (Optional) IR camera for Windows Hello

MANAGEABILITY

System Management

System Management

- Intel vPro^[1]
- Non-vPro

Notes:

[1] Intel vPro offers a superset of DASH's defined capabilities.

SERVICE

Warranty^[1]

Base Warranty**

ThinkPad L13 Yoga Gen 2 (Intel)

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) limited onsite service
- No base warranty

Notes:

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

ENVIRONMENTAL

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

ACCESSORIES

Bundled Accessories

Bundled Accessories***

- Lenovo USB-C to USB-C Cable 2m
- Lenovo USB-C to Ethernet Adapter
- Lenovo USB-C to USB-A Adapter
- ThinkPad Ethernet Extension Adapter Gen 2
- None

CERTIFICATIONS

Green Certifications^[1]

Green Certifications

- (Optional) ENERGY STAR® 8.0
- (Optional) EPEAT™ Gold Registered^[2]
- TCO Certified
- RoHS compliant

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.

[2] EPEAT is registered where applicable, please see <https://www.epeat.net> for registration status by country.

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

