


OVERVIEW

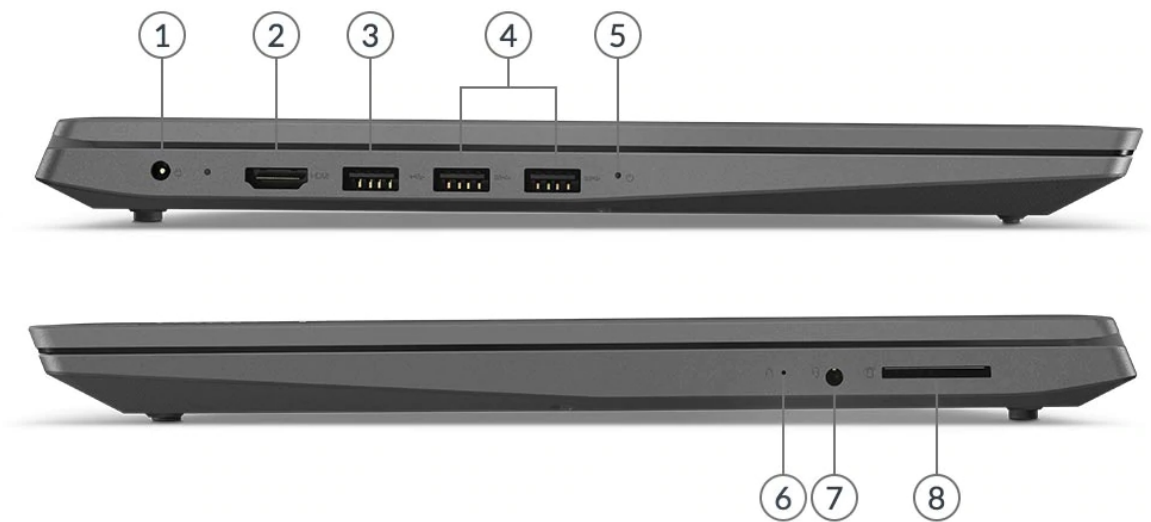

1. Power connector	5. Power indicator
2. HDMI 1.4b	6. NOVO button hole
3. USB 2.0	7. Headphone / microphone combo jack (3.5mm)
4. 2x USB 3.1 Gen 1	8. Card reader

PERFORMANCE

Processor

Processor Family

AMD Ryzen™ 5 / 7 Processor

Processor

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
AMD Ryzen 5 4500U	6	6	2.3GHz	4.0GHz	3MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen 5 4600U	6	12	2.1GHz	4.0GHz	3MB L2 / 8MB L3	DDR4-3200	AMD Radeon Graphics
AMD Ryzen 7 4700U	8	8	2.0GHz	4.1GHz	4MB L2 / 8MB L3	DDR4-3200	AMD Radeon Graphics

Operating System

Operating System

- Windows® 10 Home 64
- Windows 10 Pro 64
- FreeDOS

Graphics

Graphics

Graphics	Type	Memory	Key Features
AMD Radeon Graphics	Integrated	Shared	DirectX® 12

Monitor Support

Monitor Support

Supports up to 2 independent displays via native display and 1 external monitor; supports external monitor via HDMI® (up to 3840x2160@30Hz)

Chipset

Chipset

AMD SoC (System on Chip) platform

Memory

Max Memory<sup>[1]</sup>

Up to 8GB (4GB soldered + 4GB SO-DIMM) DDR4-2666

Memory Slots

One memory soldered to systemboard, one DDR4 SO-DIMM slot

Memory Type

DDR4-2666

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support

Up to two drives, 1x 2.5" HDD + 1x M.2 SSD

- 2.5" HDD up to 1TB
- M.2 2242 SSD up to 512GB
- M.2 2280 SSD up to 512GB

Storage Type

Disk Type	Interface	RPM	Security
2.5" SATA HDD	SATA 6Gb/s	5.4K	-
M.2 2242 SSD	PCIe NVMe, PCIe 3.0 x2	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	-

Removable Storage

Optical

None

Card Reader

4-in-1 card reader (SD, SDHC, SDXC, MMC)

Multi-Media

Audio Chip

High Definition (HD) Audio

Speakers

Stereo speakers, 1.5W x2, Dolby® Audio™

Microphone

Single microphone

Camera

0.3-megapixel, fixed focus

Battery

Battery

- Integrated Li-Polymer 30Wh battery
- Integrated Li-Polymer 35Wh battery

Max Battery Life<sup>[1]</sup>

- MobileMark® 2014: 5 hr (30Wh)
- MobileMark 2014: 6 hr (35Wh)

Notes:

1. All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, and/or JEITA 2.0 battery-life benchmark tests. Actual battery life will vary and depends on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter

65W round tip (2-pin, wall-mount) AC adapter

DESIGN

Display

Display<sup>[1]</sup>

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle	Key Features
14.0"	HD (1366x768)	None	TN	220 nits	Anti-glare	16:9	-	-	-	-
14.0"	FHD (1920x1080)	None	TN	220 nits	Anti-glare	16:9	-	-	-	-

Touchscreen

Non-touch

Notes:

## 1. California Electronic Waste Recycling Fee

In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product.  
For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

## Input Device

### Keyboard

6-row, spill-resistant, multimedia Fn keys

### Keyboard Backlight

No support

### Touchpad

Buttonless Mylar® surface multi-touch touchpad

## Mechanical

### Dimensions (WxDxH)

327.1 x 241 x 19.9 mm (12.88 x 9.49 x 0.78 inches)

### Weight<sup>[1]</sup>

1.6 kg (3.53 lbs)

### Case Color

Iron grey

### Surface Treatment

- IMR (in-mold decoration by roller)
- Texture

### Case Material

PC + ABS (top), PC + ABS (bottom)

#### Notes:

1. The system weight varies depending on configurations

## CONNECTIVITY

### Network

#### Onboard Ethernet

No Ethernet

#### WLAN + Bluetooth®

802.11ac 2x2 Wi-Fi® + Bluetooth 5.0, M.2 card

### Ports<sup>[1]</sup>

#### Standard Ports<sup>[2]</sup>

- 1x USB 2.0
- 2x USB 3.1 Gen 1
- 1x HDMI 1.4b
- 1x Card reader
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Power connector

#### Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.  
USB 2.0: 480 Mbit/s;  
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;  
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;  
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;  
Thunderbolt™ 3: 40 Gbit/s;  
FireWire 400: 400 Mbit/s;  
FireWire 800: 800 Mbit/s
2. Depending on many factors, actual data transfer speed may be lower than theoretical speed

## SECURITY & PRIVACY

## Security

### Security Chip

Firmware TPM 2.0 integrated in chipset

### Fingerprint Reader

No fingerprint reader

### BIOS Security

- Supervisor password
- Power-on password
- Hard disk password

## SERVICE

## Warranty

### Base Warranty

- 1-year depot service
- 2-year (1-yr battery) depot service

## ENVIRONMENTAL

## Operating Environment

### Temperature<sup>[1]</sup>

- At altitudes up to 2438 m (8,000 ft)
  - Operating: 5°C to 35°C (41°F to 95°F)
  - Storage: 5°C to 43°C (41°F to 109°F)
- At altitudes above 2438 m (8,000 ft)
  - Maximum temperature when operating under the unpressurized condition: 31.3°C (88°F)

### Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage: 5% to 95% at wet-bulb temperature 27°C (81°F)

### Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

### Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F)

## CERTIFICATIONS

## Green Certifications

### Green Certifications

- ENERGY STAR® 8.0
- ErP Lot 3
- RoHS compliant

