


OVERVIEW

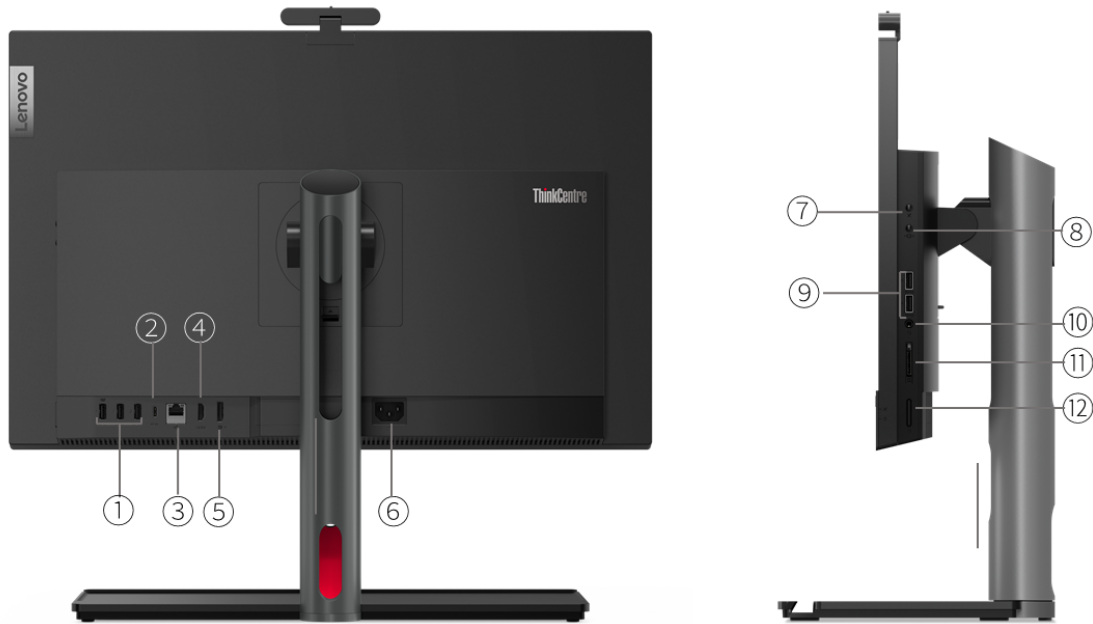

1. 3x USB 3.2 Gen 1	7. Microphone mute button
2. USB-C 3.2 Gen 2 (data transfer, 15W charging)	8. PC / monitor mode switch
3. Ethernet (RJ-45)	9. 2x USB 3.2 Gen 2
4. HDMI (HDMI in / HDMI out combo port)	10. Headphone / microphone combo jack (3.5mm)
5. DisplayPort 1.4	11. Card reader *
6. Power connector	12. Power button

Notes:

- Items with * are only available on selected models

PERFORMANCE

Processor

Processor Family

Intel® Celeron®, Intel® Pentium®, or 12th Generation Intel® Core™ i3 / i5 / i7 / i9 Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Celeron® G6900	2	2	3.4GHz	-	4MB	DDR4-3200	Intel® UHD Graphics 710
Pentium® Gold G7400	2	4	3.7GHz	-	6MB	DDR4-3200	Intel® UHD Graphics 710
Core™ i3-12100	4 (4 P-core + 0 E-core)	8	P-core 3.3GHz	P-core 4.3GHz ^[1]	12MB	DDR4-3200	Intel® UHD Graphics 730
Core™ i3-12300	4 (4 P-core + 0 E-core)	8	P-core 3.5GHz	P-core 4.4GHz ^[2]	12MB	DDR4-3200	Intel® UHD Graphics 730
Core™ i5-12400	6 (6 P-core + 0 E-core)	12	P-core 2.5GHz	P-core 4.4GHz ^[3]	18MB	DDR4-3200	Intel® UHD Graphics 730
Core™ i5-12500	6 (6 P-core + 0 E-core)	12	P-core 3.0GHz	P-core 4.6GHz ^[4]	18MB	DDR4-3200	Intel® UHD Graphics 770
Core™ i5-12600	6 (6 P-core + 0 E-core)	12	P-core 3.3GHz	P-core 4.8GHz ^[5]	18MB	DDR4-3200	Intel® UHD Graphics 770
Core™ i7-12700	12 (8 P-core + 4 E-core)	20	P-core 2.1GHz / E-core 1.6GHz	Max Turbo up to 4.9GHz / P-core 4.8GHz / E-core 3.6GHz ^[6]	25MB	DDR5-4800	Intel® UHD Graphics 770
Core™ i9-12900	16 (8 P-core + 8 E-core)	24	P-core 2.4GHz / E-core 1.8GHz	Max Turbo up to 5.1GHz / P-core 5.0GHz / E-core 3.8GHz ^[7]	30MB	DDR5-4800	Intel® UHD Graphics 770

Notes:

[1], [2], [3], [4], [5], [6], [7] Intel® Max Turbo frequency will vary depending on application workload and the hardware and software configurations, see <http://www.intel.com/technology/turboboost/> for more information.

Operating System

Operating System**

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Windows® 11 DG Windows® 10 Pro 64
- No preload operating system

Graphics

Graphics**

Graphics	Type	Memory	Connector	Max Resolution	Key Features
Intel® UHD graphics 710	Integrated	Shared	1x HDMI® 2.1 TMDS, 1x DP 1.4	4096x2160@60Hz(HDMI®), 5120x2160@60Hz(DP)	DirectX® 12
Intel® UHD graphics 730	Integrated	Shared	1x HDMI® 2.1 TMDS, 1x DP 1.4	4096x2160@60Hz(HDMI®), 5120x2160@60Hz(DP)	DirectX® 12
Intel® UHD graphics 770	Integrated	Shared	1x HDMI® 2.1 TMDS, 1x DP 1.4	4096x2160@60Hz(HDMI®), 5120x2160@60Hz(DP)	DirectX® 12

Monitor Support

Monitor Support

Supports up to 3 independent displays via native display and 2 external monitor; supports external monitors via DisplayPort™ and HDMI®; work as standalone monitor via HDMI® (HDMI® in / out combo)

Chipset**Chipset**

Intel® Q670 chipset

Memory**Max Memory^[1]**

Up to 64GB DDR4-3200

Memory Slots

Two DDR4 SO-DIMM slots, dual-channel capable

Memory Type

DDR4-3200

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

Storage**Storage Support^{[1][2]}**

Up to three drives, 2x 2.5" HDD + 1x M.2 SSD

- 2.5" HDD up to 2TB each
- M.2 SSD up to 1TB

Technical support up to 2 HDDs + 1 SSD, but Lenovo® only offers the models with up to 2 HDDs or 1 SSD + 1 HDD

Storage Type

Disk Type	Interface	RPM	Security
2.5" SATA HDD	SATA 6Gb/s	5.4K	-
2.5" SATA HDD	SATA 6Gb/s	7.2K	-
M.2 2280 SSD	PCIe® NVMe®, PCIe® 3.0 x4	-	Opal 2.0
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4 Performance	-	Opal 2.0
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4 Value	-	Opal 2.0

RAID^[3]

RAID 0/1 support for HDDs

Notes:

[1] The max capacity of each disk type is based on the test results with current Lenovo® storage offerings.

[2] 2nd 2.5" HDD occupies ODD bay, and needs ODD to HDD bracket kit (optional, come with 2nd 2.5" HDD).

[3] RAID is not preset by default, user can config RAID 0/1 according to the demand.

Removable Storage**Optical****

- DVD-ROM, SATA connector, slim (9.0mm)
- DVD burner (DVD±RW), SATA connector, slim (9.0mm)
- None

Card Reader

- 3-in-1 card reader (SD, SDHC, SDXC)
- No card reader

Multi-Media**Audio Chip**

High Definition (HD) Audio, Realtek® ALC256-NL codec

Speakers

ThinkCentre M70a Gen 3

Stereo speakers, 2W x2, Dolby® Atmos®

Microphone

- Dual-microphone array
- No microphone

Camera**

- 5.0-megapixel, IR + RGB hybrid, with ThinkShutter (physical switch on/off), ±20° view angle adjustable, Windows® Hello support
- 5.0-megapixel, with ThinkShutter (physical switch on/off), ±20° view angle adjustable
- No camera

Power Supply

Power Supply

Power	Type	Efficiency	Key Features
180W	Fixed	90%	100V - 240V, 50-60Hz

DESIGN

Display

Display**[1]

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Refresh Rate	Viewing Angle (L/R/U/D)	Key Features
21.5"	FHD (1920x1080)	None	IPS	250nits	Anti-glare	16:9	1000:1	72% NTSC	60Hz	89°/89°/89°/89°	14ms response Time, borderless design, low blue light, flicker free
21.5"	FHD (1920x1080)	Multi-touch	IPS	250nits	Anti-glare	16:9	1000:1	72% NTSC	60Hz	89°/89°/89°/89°	14ms response Time, borderless design, low blue light, flicker free

Touchscreen

- Advanced In-cell Touch (AIT), supports 10-point touch
- Non-touch

Notes:

[1] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

Input Device

Keyboard**

- Lenovo® Calliope Keyboard (USB connector), black
- Lenovo® Calliope Wireless Keyboard (2.4GHz via USB receiver), black
- Lenovo® Traditional Keyboard (USB connector), black
- No keyboard

Mouse**

- Lenovo® Calliope Mouse (USB connector), black
- Lenovo® Calliope Wireless Mouse (2.4GHz via USB receiver), black
- Lenovo® Fingerprint Mouse (USB connector), Windows® Hello support, black (EOL on Jan, 2023)
- No mouse

Mechanical

Buttons

- Microphone mute button
- Monitor / PC mode switch button
- Power button

Form Factor

AIO (21.5 inches)

Dimensions (WxDxH)^[1]

Models	Dimensions
Models (with UltraFlex V stand, with camera)	Lowest in vertical mode: 489 x 216.32 x 358.82 mm (19.25 x 8.52 x 14.13 inches) Highest in vertical mode: 489 x 216.32 x 443.31 mm (19.25 x 8.52 x 17.45 inches)
Models (with UltraFlex V stand, without camera)	Lowest in vertical mode: 489 x 216.32 x 338.32 mm (19.25 x 8.52 x 13.32 inches) Highest in vertical mode: 489 x 216.32 x 422.81 mm (19.25 x 8.52 x 16.65 inches)
Models (with full function monitor stand, with camera)	Lowest in vertical mode: 489 x 217.31 x 365.96 mm (19.52 x 8.56 x 14.41 inches) Highest in vertical mode: 489 x 217.31 x 474.97 mm (19.52 x 8.56 x 18.7 inches)
Models (with full function monitor stand, without camera)	Lowest in vertical mode: 489 x 217.31 x 345.46 mm (19.52 x 8.56 x 13.6 inches) Highest in vertical mode: 489 x 217.31 x 454.47 mm (19.52 x 8.56 x 17.89 inches)

Packaging Dimensions (WxDxH)

- With Full Function Monitor Stand: 605 x 235 x 550 mm (23.82 x 9.35 x 21.65 inches)
- With UltraFlex V Stand: 605 x 248 x 545 mm (23.82 x 9.76 x 23.46 inches)

Weight^[2]

Models	Weight
Models (with UltraFlex V stand, with ODD, with camera)	Around 7.985 kg (17.6 lbs)
Models (with full function monitor stand, with ODD, with camera)	Around 7.678 kg (16.92 lbs)

Packaging Weight

- With Full Function Monitor Stand: 1.867 kg (4.12 lbs), packaging only
- With UltraFlex V Stand: 1.983 kg (4.37 lbs), packaging only

Case Color

Black

Bays^[3]

- 2x 2.5" disk bay (2nd 2.5" HDD occupies ODD bay)
- 1x slim ODD bay

Expansion Slots

Two M.2 slots (one for WLAN, one for SSD)

EOU

Toolless cover, stand, motherboard shielding, HDD, and memory assembly / removal

Stand**

- UltraFlex V stand, supports -5° to +70° tilt, up to 70°±2° lift (up to 179.96mm lift in flat mode / up to 84.37mm lift in vertical mode)
- Full function monitor stand, supports -5° to +20° tilt, left & right 45° swivel, 90° pivot, up to 110mm lift
- No stand

Mounting

Supports VESA mount 100mm

Others

- (Optional) Conference Call Base, 3W x4 Harman speakers, 4 digital microphones array with AI noise suppression, Physical button for Teams, USB-C® connector
- Supports Smart Power On

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

[3] 2nd 2.5" HDD needs ODD to HDD bracket kit (optional, come with 2nd 2.5" HDD).

CONNECTIVITY

Network

Onboard Ethernet

Gigabit Ethernet, Realtek® RTL8111K, 1x RJ-45, supports Wake-on-LAN

Optional Ethernet

No optional Ethernet

WLAN + Bluetooth®**

- Realtek® RTL8822CE, 802.11ac Dual Band 2x2 Wi-Fi® + Bluetooth® 5.0, M.2 card
- Intel® Wireless-AC 9560, 802.11ac Dual Band 2x2 Wi-Fi® + Bluetooth® 5.1, M.2 card
- MediaTek Wi-Fi® 6 MT7921, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 Card^[1]
- Realtek® Wi-Fi® 6 RTL8852AE, 802.11ax Dual Band 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 card^[2]
- Realtek® Wi-Fi® 6 RTL8852BE, 802.11ax Dual Band 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 card^[3]
- Intel® Wi-Fi® 6 AX201, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.2, M.2 Card^[4]
- No WLAN and Bluetooth®

Notes:

[1], [2], [3] Bluetooth® 5.3 requires Windows® 11.

[4] Bluetooth® 5.2 requires Windows® 11.

Ports^[1]

Rear Ports

- 1x USB-C® 3.2 Gen 2 (support data transfer and 15W charging)
- 3x USB 3.2 Gen 1
- 1x HDMI® (HDMI® in 1.4 / HDMI® out 2.1 TMDS combo port)
- 1x DisplayPort™ 1.4
- 1x Ethernet (RJ-45)

Optional Rear Ports

1x serial

Right Ports

- 2x USB 3.2 Gen 2
- 1x headphone / microphone combo jack (3.5mm)

Optional Right Ports

1x card reader

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

Monitor Cable

Monitor Cable**

- HDMI® to DVI dongle
- HDMI® to VGA dongle

- DP to VGA dongle
- DP to dual DP dongle
- DP to DVI-D dongle
- DP to HDMI® dongle
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

Kensington® Security Slot™, 3 x 7 mm

Chassis Intrusion Switch

- Chassis intrusion switch
- No chassis intrusion switch

Fingerprint Reader

- Touch style fingerprint reader on mouse (EOL on Jan, 2023)
- No fingerprint reader

Other Security

(Optional) ThinkShutter camera cover

BIOS Security

- Administrator password
- Power-on password
- Hard disk password
- Boot sequence control
- Boot without keyboard and mouse
- Self-healing BIOS
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- Individual USB port disablement

MANAGEABILITY

System Management

System Management

Non-vPro®

SERVICE

Warranty^[1]

Base Warranty

- 1-year courier or carry-in service
- 1-year limited onsite service
- 3-year limited onsite service
- No base warranty

Notes:

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

ENVIRONMENTAL

Operating Environment

Temperature

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -20°C (-4°F) to 60°C (140°F)

Relative Humidity

Operating: 20% to 80%

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

CERTIFICATIONS

Green Certifications^[1]

Green Certifications

- (Optional) ENERGY STAR® 8.0
- (Optional) EPEAT™ Gold Registered^[2]
- ErP Lot 3
- RoHS compliant
- TCO Certified 9.0
- TCO edge

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.

[2] EPEAT™ is registered where applicable, please see epeat.net for registration status by country.

Other Certifications

Other Certifications

- (Optional) TÜV Rheinland® Ultra Low Noise
- TÜV Rheinland® Flicker Free
- TÜV Rheinland® Low Blue Light
- UL Anti-dust

Mil-Spec Test

MIL-STD-810H military test passed (Low Pressure [Altitude], High Temperature, Low Temperature, Temperature Shock, Humidity, Sand and Dust, Vibration, Shock, Fungus, Solar Radiation, Contamination by Fluids, Salt Fog)

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



intel



intel



intel



intel



intel

