


# **OVERVIEW**

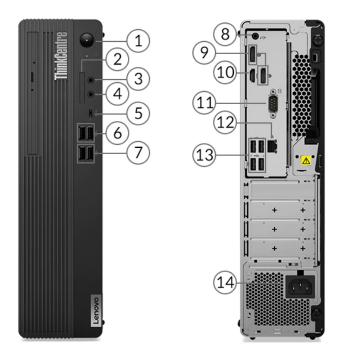

1. Power button	8. Line-out (3.5mm)
2. Card reader	9. 2x DisplayPort 1.4
3. Microphone (3.5mm)	10. HDMI 1.4b
4. Headphone / microphone combo jack (3.5mm)	11. Serial
5. USB-C 3.2 Gen 1	12. Ethernet (RJ-45)
6. 2x USB 3.2 Gen 1	13. 4x USB 2.0 (Note 1)
7. 2x USB 3.2 Gen 2	14. Power connector

## Notes:

- 4 rear USB ports are USB 3.2 Gen 1 for selected Brazil models only
- More ports are available through the optional expansion cards (not shown on the sample product above)



# **PERFORMANCE**

## **Processor**

## **Processor Family**

AMD Athlon  $^{\text{\tiny{TM}}}$  or AMD Ryzen  $^{\text{\tiny{TM}}}$  3 / 5 / 7 / 9 Processor

## Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
AMD Athlon™ Gold PRO 3150G <sup>[1]</sup>	4	4	3.5GHz	3.9GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon™ Graphics
AMD Athlon™ Silver 3050GE <sup>[2]</sup>	2	4	3.4GHz	3.4GHz	1MB L2 / 4MB L3	DDR4-2666	AMD Radeon™ Graphics
AMD Ryzen <sup>™</sup> 3 3200G	4	4	3.6GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon™ Vega 8 Graphics
AMD Ryzen™ 3 4300G	4	8	3.8GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 3 5300G	4	8	4.0GHz	4.2GHz	2MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 3 PRO 4350G <sup>[5]</sup>	4	8	3.8GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 3 PRO 5350G	4	8	4.0GHz	4.2GHz	2MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 5 4600G	6	12	3.7GHz	4.2GHz	3MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 5 5600G	6	12	3.9GHz	4.4GHz	3MB L2 / 16MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 5 PRO 3350G <sup>[7]</sup>	4	8	3.6GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon™ Vega 11 Graphics
AMD Ryzen™ 5 PRO 3400G <sup>[8]</sup>	4	8	3.7GHz	4.2GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon™ Vega 11 Graphics
AMD Ryzen™ 5 PRO 3600 <sup>[9]</sup>	6	12	3.6GHz	4.2GHz	3MB L2 / 32MB L3	DDR4-3200	-
AMD Ryzen™ 5 PRO 4650G <sup>[10]</sup>	6	12	3.7GHz	4.2GHz	3MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 5 PRO 5650G	6	12	3.9GHz	4.4GHz	3MB L2 / 16MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 7 4700G	8	16	3.6GHz	4.4GHz	4MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 7 5700G	8	16	3.8GHz	4.6GHz	4MB L2 / 16MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 7 PRO 3700 <sup>[12]</sup>	8	16	3.6GHz	4.4GHz	4MB L2 / 32MB L3	DDR4-3200	-
AMD Ryzen™ 7 PRO 4750G <sup>[13]</sup>	8	16	3.6GHz	4.4GHz	4MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 7 PRO 5750G	8	16	3.8GHz	4.6GHz	4MB L2 / 16MB L3	DDR4 3200	AMD Radeon™ Graphics
AMD Ryzen™ 9 PRO 3900 <sup>[14]</sup>	12	24	3.1GHz	4.3GHz	6MB L2 / 64MB L3	DDR4-3200	-

Notes:

[1], [2], [3], [4], [5], [6], [7], [8], [9], [10], [11], [12], [13], [14] End of life and not available any more.

# **Operating System**



#### Operating System\*\*

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Windows® 11 DG Windows® 10 Pro 64
- Windows® 10 Pro 64
- Windows® 10 Home 64
- Windows® 10 Home 64 Single Language
- Windows® 10 IoT Enterprise
- Ubuntu Linux[1]
- No preload operating system

#### Notes:

[1] Some features may not be supported on the system with Linux preload, including but not limited to Intel® RST RAID, Human Presence Detection, etc.

## **Graphics**

### Graphics\*\*[1][2]

Graphics	Туре	Memory	Connector	Max Resolution	Key Features
AMD Radeon™ Graphics	Integrated	Shared	2x DisplayPort™ 1.4, 1x HDMI® 1.4	4096x2160@60Hz(DP), 4096x2160@24Hz(HDMI®)	DirectX® 12
AMD Radeon™ Vega 11 Graphics	Integrated	Shared	2x DisplayPort™ 1.4, 1x HDMI® 1.4	4096x2160@60Hz(DP), 4096x2160@24Hz(HDMI®)	DirectX® 12
AMD Radeon™ Vega 8 Graphics	Integrated	Shared	2x DisplayPort™ 1.4, 1x HDMI® 1.4	4096x2160@60Hz(DP), 4096x2160@24Hz(HDMI®)	DirectX® 12
AMD Radeon™ 520	Discrete	2GB GDDR5	2x DP 1.2	4096x2160@60Hz(DP)	DirectX® 12
AMD Radeon™ RX 550X	Discrete	4GB GDDR5	1x HDMI® 2.0, 1x DP 1.4	4096x2160@60Hz(HDMI®), 3840x2160@60Hz(DP)	DirectX® 12, OpenGL 4.5
AMD Radeon™ RX 6400	Discrete	4GB GDDR6	1x HDMI® 2.1 FRL, 1x DP 1.4a	7680x4320@60Hz(HDMI®), 7680x4320@60Hz(DP)	DirectX® 12, OpenGL 4.6

#### Notes:

[1] The information of integrated graphics are not applicable for the models with processor which has no integrated graphics inside (for the details, please refer to processor section).

[2] AMD Radeon™ 520 is not available for MT 11R7 / 11R8 / 11R9 / 11RA.

### **Monitor Support**

### **Monitor Support**

Supports up to 3 independent displays via onboard ports (HDMI $^{\circ}$  and 2x DisplayPort $^{\mathsf{TM}}$ ), more displays support via discrete graphics

## **Chipset**

### Chipset

AMD PRO 565 chipset

### **Memory**<sup>[1]</sup>

Max Memory<sup>[2]</sup>

Up to 128GB DDR4-3200

## **Memory Slots**

Four DDR4 DIMM slots, dual-channel capable

# Memory Type\*\*[3]

- DDR4-1866
- DDR4-2133
- DDR4-2400
- DDR4-2666



• DDR4-3200

#### Notes:

- [1] Recommend to choose the models with more than 4GB for better performance and experience.
- [2] The max memory is based on the test results with current Lenovo® memory offerings.
- [3] Installed memory is actually 3200MHz, but may run at 1866MHz, 2133MHz, 2400MHz or 2666MHz depending on the memory support capability of processor.

## **Storage**

#### Storage Support[1]

Up to three drives, 1x 2.5"/3.5" HDD + 1x 2.5" HDD + 1x M.2 SSD

- 2.5" HDD up to 1TB each
- 3.5" HDD up to 2TB
- M.2 SSD up to 2TB

### Storage Type\*\*\*

Disk Type	Interface		Security
2.5" SATA HDD	SATA 6Gb/s	7.2K	-
3.5" SATA HDD	SATA 6Gb/s	7.2K	-
M.2 2280 SSD	PCIe® NVMe®, PCIe® 3.0 x4	-	Opal
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4 Value <sup>[2]</sup>	-	Opal 2.0
M.2 2280 SSD <sup>[3]</sup>	PCIe® NVMe®, PCIe® x4	-	Opal 2.0
M.2 2242 SSD	PCIe® NVMe®, PCIe® 3.0 x2	-	-
M.2 2242 SSD	PCIe® NVMe®, PCIe® 3.0 x4	-	-

### **RAID**

RAID 0/1 support for HDDs (RAID preset only available via special bid models)

#### Notes:

- [1] The max capacity of each disk type is based on the test results with current Lenovo® storage offerings.
- [2] M.2 PCle® Gen 4 SSD in the M.2 PCle® Gen 3 slot is downgraded to PCle® Gen 3 performance.
- [3] PCle® x4 SSD may be PCle® 3.0 x4 or PCle® 4.0 x4 as substitution. M.2 PCle® Gen 4 SSD in the M.2 PCle® Gen 3 slot is downgraded to PCle® Gen 3 performance.

## Removable Storage

### Optical\*\*

- DVD-ROM, SATA 1.5Gb/s, slim (9.0mm)
- DVD burner (DVD±RW), SATA 1.5Gb/s, slim (9.0mm)
- None

#### **Card Reader**

- 3-in-1 card reader (SD, SDHC, SDXC)
- No card reader

## Multi-Media

### **Audio Chip**

High Definition (HD) Audio, Realtek® ALC623-CG codec

### **Speakers**

- No speakers
- Single speaker, 1W x1

## **Power Supply**

### Power Supply\*\*

Power	Туре	Efficiency	Key Features
180W	Fixed	85%	-
260W	Fixed	85%	100-240V, 50-60Hz



## **DESIGN**

## **Input Device**

### Keyboard\*\*

- Lenovo® Calliope Keyboard (USB connector), black
- Lenovo® Calliope Wireless Keyboard (2.4GHz via USB receiver), black
- Lenovo® Traditional Keyboard (USB connector), black
- No keyboard

#### Mouse\*\*

- Lenovo® Calliope Mouse (USB connector), black
- Lenovo® Calliope Wireless Mouse (2.4GHz via USB receiver), black
- Lenovo® Fingerprint Mouse (USB connector), Windows® Hello support, black (EOL on Jan, 2023)
- No mouse

### Mechanical

#### **Form Factor**

SFF (8.2L)

#### Dimensions (WxDxH)[1]

92.5 x 297.7 x 339.5 mm (3.6 x 11.7 x 13.4 inches)

#### Weight<sup>[2]</sup>

Around 5.3 kg (11.7 lbs)

#### Case Color

Black

# Bays

- 1x 2.5" disk bay (bay comes with disk)
- 1x 3.5" disk bay
- 1x slim ODD bay

## **Expansion Slots**

- One PCle® 3.0 x16, low-profile (length < 155mm, height < 68mm)
- One PCIe® 3.0 x1, low-profile (length < 155mm, height < 68mm)
- Two M.2 slots (one for WLAN, one for SSD)
- Two dummy slots, only brackets for optional port extension

#### EOU

EOU design for chassis open, M.2 SSD, HDD, ODD, memory, and PCIe® extension card

#### **Stand**

- Vertical stand
- No stand

#### **Others**

- (Optional) Dust filter
- Supports Smart Power On

#### Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

## CONNECTIVITY

### **Network**<sup>[1]</sup>

#### Onboard Ethernet\*\*

• Gigabit Ethernet, Realtek® RTL8111EPV, 1x RJ-45, supports Wake-on-LAN



Gigabit Ethernet, Realtek® RTL8111HN, 1x RJ-45, supports Wake-on-LAN

#### Optional Ethernet\*\*[2]

- Gigabit Ethernet, Bitland BN8E88, 1x RJ-45, PCle® x1
- Gigabit Ethernet, Bitland RTL8111FP, 1x RJ-45, PCIe® x1
- No optional Ethernet

#### WLAN + Bluetooth®\*\*

- Realtek® RTL8822CE, 802.11ac Dual Band 2x2 Wi-Fi® + Bluetooth® 5.0, M.2 card
- Intel® Wireless-AC 9260, 802.11ac Dual Band 2x2 Wi-Fi® + Bluetooth® 5.0, M.2 card
- MediaTek Wi-Fi® 6 MT7921, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 Card[3]
- Realtek® Wi-Fi® 6 RTL8852AE, 802.11ax Dual Band 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 card<sup>[4]</sup>
- Intel® Wi-Fi® 6 AX200, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.1, M.2 card
- No WLAN and Bluetooth®

#### Notes:

- [1] This system does not support Power Over Ethernet (PoE). If the system is used in a PoE environment, then a Network Isolator is required to prevent possible damage to the system, PoE equipment, or both.
- [2] RTL8111FP is not available for AP countries.
- [3], [4] Bluetooth® 5.3 requires Windows® 11.
- [5] Bluetooth® 5.2 is hardware ready but may run at a lower version due to OS limitations.

#### Ports<sup>[1]</sup>

#### **Front Ports**

- 1x USB-C® 3.2 Gen 1
- 2x USB 3.2 Gen 1
- 2x USB 3.2 Gen 2
- 1x headphone / microphone combo jack (3.5mm)
- 1x microphone (3.5mm)

## **Optional Front Ports**

- 1x card reader
- None

## Rear Ports[2]

- 4x USB 2.0
- 1x HDMI® 1.4b
- 2x DisplayPort<sup>™</sup> 1.4
- 1x Ethernet (RJ-45)
- 1x line-out (3.5mm)
- 1x serial (9-pin)

### Optional Rear Ports\*\*\*

- 2x USB-C® 3.2 Gen 2 (support data transfer, via 2-port USB-C® expansion card, PCle® x4)
- 2x USB 3.2 Gen 1 (via 2-port USB expansion card, PCle® x1)
- 2x USB 2.0 (via 2-port adapter)
- 1x parallel
- 1x serial
- 4x serial (via 4-port serial expansion card, PCle® x1)

### Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

[2] For video ports on discrete graphics, please see graphics section.

### **Monitor Cable**

#### Monitor Cable\*\*\*

## ThinkCentre M75s Gen 2



- HDMI® to HDMI® cable (1.5m)
- HDMI® to VGA dongle
- DP to VGA dongle
- DP to VGA cable (1.5M)
- DP to dual DP dongle
- DP to DVI-D dongle
- DP to HDMI® dongle
- No monitor cable

## **SECURITY & PRIVACY**

## **Security**

### **Security Chip**

Discrete TPM 2.0, TCG certified

#### **Physical Locks**

- (Optional) E-lock
- (Optional) Smart Cable Clip
- Kensington® Security Slot™, 3 x 7 mm
- Padlock Loop

#### **Chassis Intrusion Switch**

- · Chassis intrusion switch
- · No chassis intrusion switch

#### **Fingerprint Reader**

- Touch style fingerprint reader on mouse (EOL on Jan, 2023)
- · No fingerprint reader

#### **BIOS Security**

- · Administrator password
- Power-on password
- Hard disk password
- Boot sequence control
- Boot without keyboard and mouse
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- Individual USB port disablement

## **MANAGEABILITY**

## **System Management**

### System Management[1]

- DASH 1.2
- Non-DASH

#### Notes:

[1] DASH 1.2 is an optional feature for the selected MTs, MT 11W1 / 11W2 / 11W3 / 11W4 do not support DASH.

# **SERVICE**

### **Warranty**<sup>[1]</sup>

### Base Warranty\*\*

- 1-year courier or carry-in service
- 1-year limited onsite service
- 3-year limited onsite service
- · No base warranty

### Notes:

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <a href="https://smartfind.lenovo.com/">https://smartfind.lenovo.com/</a>. To learn more details of warranty policy, please access <a href="https://pcsupport.lenovo.com/warranty">https://pcsupport.lenovo.com/warranty</a>.



## **ENVIRONMENTAL**

## **Operating Environment**

### **Temperature**

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

#### **Relative Humidity**

Operating: 20% to 80%Storage: 10% to 90%

#### **Altitude**

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

## **CERTIFICATIONS**

### 

#### Green Certifications[2]

- (Optional) ENERGY STAR® 8.0
- (Optional) EPEAT™ Silver Registered<sup>[3]</sup>
- (Optional) EPEAT™ Gold Registered[4]
- ErP Lot 3
- RoHS compliant
- TCO Certified 8.0

#### Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-

[2] ENERGY STAR® 8.0 and EPEAT™ are only available for selected MTs.

[3], [4] EPEAT™ is registered where applicable, please see epeat.net for registration status by country.

## **Other Certifications**

#### Other Certifications

- (Optional) TÜV Rheinland<sup>®</sup> Low Noise
- (Optional) TÜV Rheinland® Ultra Low Noise

### Mil-Spec Test

MIL-STD-810H military test passed (Low Pressure [Altitude], High Temperature, Low Temperature, Temperature Shock, Humidity, Sand and Dust, Vibration, Shock, Fungus, Solar Radiation)

- Feature with \*\* means that only one offering listed under the feature is configured on selected models.
- Feature with \*\*\* means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not
  responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS,"
  WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES
  OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow
  disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to
  you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.









AMD

AMD





**L**DMA





БОМА

ThinkCentre M75s Gen 2 - March 29 2024

AMD