


OVERVIEW

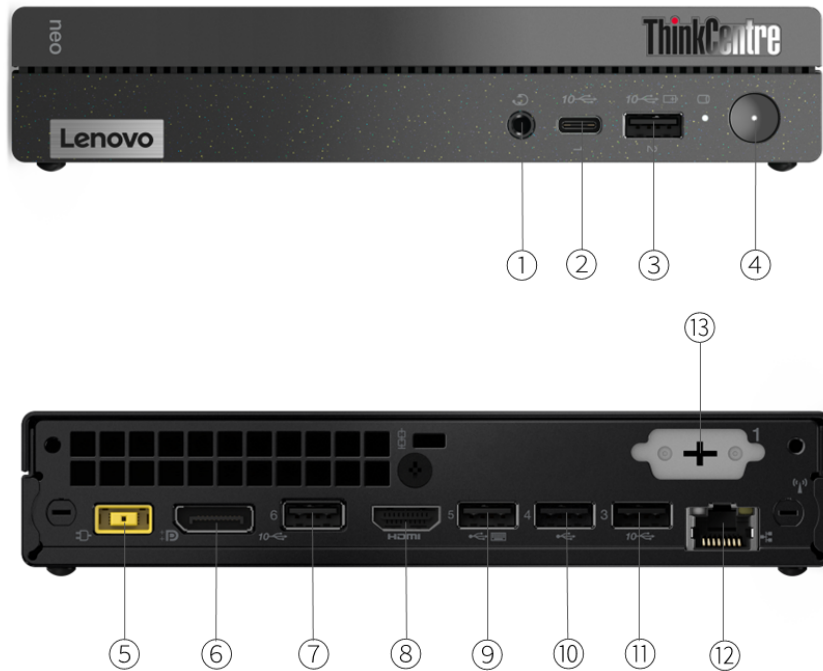

1. Headphone / microphone combo jack (3.5mm)	8. HDMI 2.1 TMDS
2. USB-C 3.2 Gen 2 (support data transfer and 5V@0.9A charging)	9. USB 2.0
3. USB 3.2 Gen 2 (Always On and 5V@2.1A charging)	10. USB 2.0
4. Power button	11. USB 3.2 Gen 2
5. Power-in	12. Ethernet (RJ-45)
6. DisplayPort 1.4	13. Punch out port *
7. USB 3.2 Gen 2	

Notes:

- Items with * are only available on selected models

PERFORMANCE

Processor

Processor Family

Intel® Celeron® or 12th Generation Intel® Core™ i3 Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
Celeron® 7305	5 (1 P-core + 4 E-core)	6	P-core 1.1GHz / E-core 0.9GHz	-	8MB Intel® Smart Cache	Intel® UHD Graphics
Core i3-1215U	6 (2 P-core + 4 E-core)	8	P-core 1.2GHz / E-core 0.9GHz	P-core 4.4GHz / E-core 3.3GHz ^[1]	10MB Intel® Smart Cache	Intel® UHD Graphics

Notes:

[1] Intel® Max Turbo frequency will vary depending on application workload and the hardware and software configurations, see <http://www.intel.com/technology/turboboost/> for more information.

Operating System

Operating System**

- Windows® 10 IoT Enterprise LTSC 2021
- IGEL Linux (with License)
- IGEL Linux (no License)^[1]
- LeTOS™ V2 (Lenovo® Terminal Operating System, Linux-based)^[2]
- No preload operating system

Notes:

[1] The device is preload with a free evaluation license. The evaluation license will be valid for a period of 90 days.

[2] LeTOS™ V2 (Lenovo® Terminal Operating System, Linux-based) is EOL

Graphics

Graphics

Graphics	Type	Memory	Max Resolution	Connector	Key Features
Intel® UHD Graphics	Integrated	Shared	4096x2160@60Hz(DP), 4096x2160@60Hz(HDMI®), 1920x1200@60Hz(VGA)	1x DP 1.4, 1x HDMI® 2.1 TMDS, 1x optional punch out port (1x VGA / 1x DP 1.4)	DirectX® 12.1

Monitor Support

Monitor Support

Supports up to 3 independent displays via (onboard DP, onboard HDMI®, optional punch out port)

Chipset

Chipset

Intel® SoC (System on Chip) platform

Memory

Max Memory^[1]

- Models with Intel® Celeron® processor: Up to 16GB DDR4-3200
- Models with Intel® Core™ processor: Up to 32GB DDR4-3200

Memory Slots

- Models with Intel® Core™ processor: Two DDR4 SODIMM slots, dual-channel capable
- Models with Intel® Celeron® processor: One DDR4 SODIMM slot, dual-channel capable

Memory Type

DDR4-3200

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

Storage

Max Storage Support^[1]

One drive, 256GB M.2 2280 SSD

Storage Type

Disk Type	Interface	Security
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	Opal 2.0

Notes:

[1] The max capacity of each disk type is based on the test results with current Lenovo® storage offerings.

Removable Storage

Optical

None

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC256 codec

Speakers

Single speaker, 2W x1

Microphone

No microphone

Power Supply

Power Supply^{[1]}**

Power	Type	Efficiency	Key Features
65W	Adapter	89%	Autosensing
90W	Adapter	89%	Autosensing
No power adapter	-	-	-

Notes:

[1] When work with TIO monitor, an appropriate power adapter is needed. Customer may need to:

- Order a Tiny for TIO MT (12LK, 12LK, 12M3, 12M4) models
- Or order an additional 90W power adapter. If original power adapter is less than 90W.

For detailed information, please refer to [ThinkCentre® neo 50q Gen 4 Thin Client Adapter Matrix](#)

DESIGN

Input Device

Keyboard

- Lenovo® Calliope Keyboard (USB connector), black
- No keyboard

Mouse

- Lenovo® Calliope Mouse (USB connector), black
- No mouse

Mechanical

Form Factor

Tiny (1L)

Dimensions (WxDxH)^[1]

179 x 182.9 x 36.5 mm (7.05 x 7.2 x 1.44 inches)

Packaging Dimensions (WxDxH)^[2]

494 x 250 x 130 mm (19.45 x 9.84 x 5.12 inches)

Weight^[3]

Around 1.11 kg (2.45 lbs)

Packaging Weight^[4]

Around 3.2 kg (7.05 lbs)

Case Color

Black

Bays

No bays

Expansion Slots

Two M.2 slots (one for WLAN, one for SSD)

EOU

(Optional) toolless chassis open (toolless chassis screw required)

Stand

- Vertical stand
- No stand

Mounting

- Supports VESA mount 100mm
- None

Cooling System (Fan & Cooler)

- 1x system fan
- No System Fan

Others

(Optional) Power adapter cage

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The new package takes effect from November 2023. The old package is:
140 x 262 x 500 mm (5.51 x 10.31 x 19.69 inches)

[3] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

[4] The new package takes effect from November 2023. The old package is:
Around 5.18 kg (11.42 lbs)

CONNECTIVITY

Network

WLAN + Bluetooth®**^[1]

- Realtek® Wi-Fi® 6 RTL8852BE, 802.11ax Dual Band 2x2 Wi-Fi® + Bluetooth® 5.1, M.2 card
- Intel® Wi-Fi® 6 AX201, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.1, M.2 card
- No WLAN and Bluetooth®

Onboard Ethernet

Gigabit Ethernet, Realtek® RTL8111K-CG, 1x RJ-45

Notes:

[1] Wi-Fi® operation (including Wi-Fi® 6, Wi-Fi® 6E, Wi-Fi® 7, etc.) is subject to the regulatory requirements of each country. Bluetooth® may operate at a lower version than hardware design depending on the factors such as operating system, driver, etc.

Ports^[1]

Front Ports

- 1x USB-C® 3.2 Gen 2 (support data transfer and 5V@0.9A charging)
- 1x USB 3.2 Gen 2 (Always On and 5V@2.1A charging)
- 1x headphone / microphone combo jack (3.5mm)

Optional Front Ports

None

Rear Ports

- 1x HDMI® 2.1 TMDS
- 1x DisplayPort™ 1.4
- 1x Ethernet (RJ-45)
- 2x USB 2.0
- 2x USB 3.2 Gen 2

Optional Rear Ports^[2]

Punch out port (one of VGA / DisplayPort™ 1.4 / serial)

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

Thunderbolt™ 5: 80 Gbit/s (bidirectional), up to 120 Gbit/s in bandwidth boost mode for video-intensive applications.

[2] Punch out ports only available on i3 models.

SECURITY & PRIVACY

Security

Security Chip

Firmware TPM 2.0 integrated in SoC

Physical Locks

Kensington® Security Slot™, 3 x 7 mm

Chassis Intrusion Switch

Chassis intrusion switch^[1]

BIOS Security

- Boot sequence control
- Configuration change detection
- Cover tamper detected
- Intel® BIOS guard
- Individual USB port disablement
- Hard disk password
- Supervisor password
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- Never crash Self-healing
- Secure boot
- Secure wipe
- More BIOS security features, please visit [BIOS Simulator](#)^[2]

Notes:

[1] Chassis intrusion switch is hardware ready function and needs to be special bid or manually enabled in BIOS.

[2] The BIOS simulator is just for reference. Default settings and some options may vary depending on the hardware, operating system and BIOS version.

MANAGEABILITY

System Management

System Management

None

SERVICE

Warranty^[1]

Base Warranty**

- 1-year courier or carry-in service
- 1-year limited onsite service
- No base warranty

Notes:

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://support.lenovo.com/warrantylookup/warrantypolicy>.

OPERATING REQUIREMENTS

Operating Environment

Temperature

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Relative Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

CERTIFICATIONS

Green Certifications^[1]

Green Certifications

- (Optional) ENERGY STAR® 8.0
- ErP Lot 3/7
- RoHS compliant
- TCO Certified 9.0

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

Other Certifications

Other Certifications

(Optional) TÜV Rheinland® Ultra Low Noise

- Feature with ** means that only one option listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS", WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow

disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.

- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

