


OVERVIEW

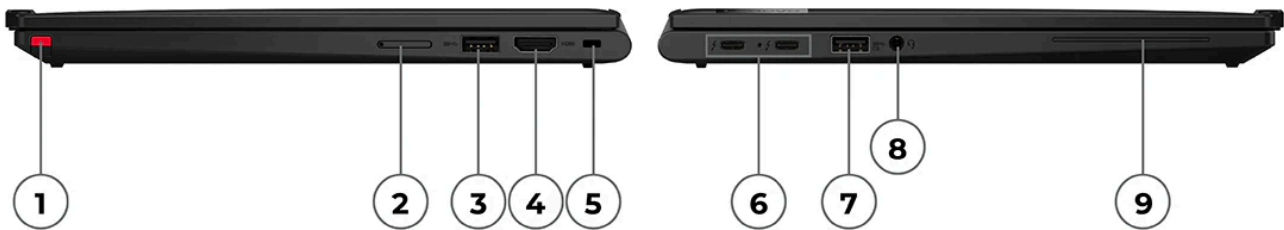

1. Pen slot *	6. 2x Thunderbolt 4
2. Nano-SIM card slot *	7. USB 3.2 Gen 1 (Always On)
3. USB 3.2 Gen 1	8. Headphone / microphone combo jack (3.5mm)
4. HDMI	9. Smart card reader *
5. Kensington Nano Security Slot	

Notes:

- Items with \* are only available on selected models

PERFORMANCE

Processor

Processor Family

13th Generation Intel® U or P Series Core i5 / i7 Processor

Processor\*\*<sup>[1]</sup>

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
Core i5-1335U	10 (2 P-core + 8 E-core)	12	P-core 1.3GHz / E-core 0.9GHz	P-core 4.6GHz / E-core 3.4GHz	12MB	Intel® Iris® Xe Graphics
Core i5-1345U	10 (2 P-core + 8 E-core)	12	P-core 1.6GHz / E-core 1.2GHz	P-core 4.7GHz / E-core 3.5GHz	12MB	Intel® Iris® Xe Graphics
Core i7-1355U	10 (2 P-core + 8 E-core)	12	P-core 1.7GHz / E-core 1.2GHz	P-core 5.0GHz / E-core 3.7GHz	12MB	Intel® Iris® Xe Graphics
Core i7-1360P	12 (4 P-core + 8 E-core)	16	P-core 2.2GHz / E-core 1.6GHz	P-core 5.0GHz / E-core 3.7GHz	18MB	Intel® Iris® Xe Graphics
Core i7-1365U	10 (2 P-core + 8 E-core)	12	P-core 1.8GHz / E-core 1.3GHz	P-core 5.2GHz / E-core 3.9GHz	12MB	Intel® Iris® Xe Graphics
Core i7-1370P	14 (6 P-core + 8 E-core)	20	P-core 1.9GHz / E-core 1.4GHz	P-core 5.2GHz / E-core 3.9GHz	24MB	Intel® Iris® Xe Graphics

Notes:

<sup>[1]</sup> Intel® P series processors are for special bid only.

Operating System

Operating System\*\*

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Windows® 11 DG Windows® 10 Pro 64
- Ubuntu Linux<sup>[1]</sup>
- Linux<sup>[2]</sup>
- No preload operating system

Notes:

<sup>[1]</sup>, <sup>[2]</sup> Some features may not be supported on the system with Linux preload, including but not limited to Intel® RST RAID, MIPI computer vision camera, WWAN, Human Presence Detection, etc.

Graphics

Graphics

Graphics	Type	Memory	Key Features
Intel® Iris® Xe Graphics	Integrated	Shared	DirectX® 12.1

Monitor Support

Monitor Support<sup>[1]</sup>

Supports up to 4 independent displays (native display and 3 external monitors via Thunderbolt™ and HDMI®)

- Thunderbolt™ supports up to 5K@60Hz
- HDMI® supports up to 4K@60Hz

Notes:

<sup>[1]</sup> Refresh rates >60hz also supported, however max resolution will be limited.

Chipset

Chipset

Intel® SoC (System on Chip) platform

Memory

Max Memory

- 8GB soldered memory, not upgradable
- 16GB soldered memory, not upgradable
- 32GB soldered memory, not upgradable

Memory Slots

Memory soldered to systemboard, no slots, dual-channel

Memory Type

LPDDR5-4800<sup>[1]</sup>

Notes:

[1] Installed memory is actually LPDDR5-6400 but run as LPDDR5-4800 due to platform limitation.

Storage

Storage Support<sup>[1]</sup>

One drive, up to 2TB M.2 2280 SSD

Storage Slot

One M.2 2280 PCIe® 4.0 x4 slot

Storage Type\*\*

Disk Type	Interface	Offering	Security
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	256GB / 512GB / 1TB	Opal 2.0
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4 Performance	512GB / 1TB / 2TB	Opal 2.0

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.

Removable Storage

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 2W x2, Dolby Audio™ Premium

Microphone

- Dual-microphone array, 360° far-field, Dolby Voice®
- No microphone

Camera\*\*

- 5.0MP + IR discrete, with privacy shutter, fixed focus
- FHD 1080p, with privacy shutter, fixed focus
- No camera<sup>[1]</sup>

Notes:

[1] No camera is for special bid only.

Battery

Battery\*\*

- Integrated Li-Polymer 41Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter
- Integrated Li-Polymer 54.7Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

Battery Life<sup>[1]</sup>

Configuration 1 (max battery life)  
MobileMark® 25: up to 11.2 hr with 769 performance score @250nits

JEITA 2.0: up to 22.6 hr @150nits  
Local video playback: up to 18.0 hr @150nits

Alternate configuration 2  
MobileMark® 25: up to 10.8 hr with 707 performance score @250nits  
JEITA 2.0: up to 21.8 hr @150nits  
Local video playback: up to 17.3 hr @150nits

Alternate configuration 3  
MobileMark® 25: up to 9.8 hr with 739 performance score @250nits  
JEITA 2.0: up to 18.1 hr @150nits  
Local video playback: up to 15.3 hr @150nits

Notes:

[1] Configuration 1 (max battery life): WUXGA low power (touch), Intel® i5-1335U, 8GB LPDDR5, Win 11, 54.7Wh battery, best power efficiency power mode  
Alternate configuration 2: WUXGA low power (touch), Intel® i7-1360P, 16GB LPDDR5, Win 11, 54.7Wh battery, best power efficiency power mode  
Alternate configuration 3: WUXGA anti-glare (touch), Intel® i7-1370P, 16GB LPDDR5, Win 11, 54.7Wh battery, best power efficiency power mode

All battery life claims are approximate maximum and based on results using [MobileMark® 25](#), JEITA 2.0, continuous 1080p local video playback (using default Media Player in Fullscreen mode with 150nits brightness and default volume level), or Google Power Load Test (PLT) battery-life benchmark tests.  
Actual battery life will vary depending on many factors such as product configuration, software, wireless functionality, power management settings, and screen brightness.  
The maximum capacity of the battery will decrease with time, ambient temperature and use.  
Refer to [Microsoft® link](#) for more information about the Windows® Performance power slider.

Power Adapter

- Power Adapter\*\*[1]
- 45W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
  - 45W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
  - 65W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
  - 65W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
  - 65W USB-C® slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
  - 65W USB-C® slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz

Notes:

[1] AC adapter offerings depend on the country.

DESIGN

Display

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle (L/R/U/D)	Key Features
13.3"	WUXGA (1920x1200)	Multi-touch	IPS	300nits	Anti-glare	16:10	1000:1	100% sRGB	85°/85°/85°/85°	-
13.3"	WUXGA (1920x1200)	Multi-touch	IPS	300nits	Anti-reflection, anti-smudge	16:10	1000:1	100% sRGB	85°/85°/85°/85°	-
13.3"	WUXGA (1920x1200)	Multi-touch	IPS	400nits	Anti-glare	16:10	1200:1	100% sRGB	85°/85°/85°/85°	Low power, Eyesafe® Certified 2.0

Touchscreen

OGS (One Glass Solution) multi-touch, supports 10-point touch

[1] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

## Multi-mode

### Multi-mode

Laptop, tent, stand, and tablet modes supported by 360° hinge

## Input Device

### Pen

- Lenovo® Integrated Pen, with built-in rechargeable battery, 4096 levels of pressure sensitivity, on-board garaged and rechargeable
- No pen (with a pen garage ready, purchase separately)

### Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls

### Keyboard Backlight

LED backlight

### UltraNav™

TrackPoint® pointing device and glass-like Mylar® surface multi-touch touchpad, 56 x 115 mm (2.24 x 4.53 inches)

## Mechanical

### Dimensions (WxDxH)<sup>[1]</sup>

301.7 x 214.6 x 16.4 mm (11.88 x 8.45 x 0.65 inches)

### Weight<sup>[2]</sup>

Starting at 1.21 kg (2.66 lbs)

### Case Color\*\*

- Deep black
- Storm grey

### Case Material

Magnesium (top), magnesium (bottom)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

## CONNECTIVITY

## Network

### Ethernet

No onboard Ethernet<sup>[1]</sup>

### WLAN + Bluetooth®

Intel® Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3<sup>[2]</sup>

### WWAN\*\*

- Wireless WAN upgradable to 4G (with antenna ready)<sup>[3]</sup>
- Quectel EM05-G, 4G LTE CAT4, M.2 card, with embedded eSIM functionality
- Fibocom L860-GL-16, 4G LTE CAT16, M.2 card, with embedded eSIM functionality
- No support

### SIM Card

No physical SIM card inbox

### NFC

- Near Field Communication
- No support

Notes:

[1] Ethernet support via optional Lenovo® USB-C® to Ethernet Adapter.

[2] Wi-Fi® 6E full features might be limited by country-level restrictions.

Wi-Fi® 6E is only enabled on Windows® 11 and operates as Wi-Fi® 6 with Windows® 10.

6GHz Wi-Fi® 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi® 6E, and the regional regulatory certifications & spectrum allocation.

Bluetooth® 5.3 operation requires Windows® 11. For more information please visit [General Bluetooth® Support Information on Microsoft®](#).

[3] Wireless WAN upgradable to 4G is ONLY available in EMEA.

## Ports<sup>[1]</sup>

### Standard Ports

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 2x Thunderbolt™ 4 / USB4® 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort™ 2.0)
- 1x HDMI® 2.1, up to 4K/60Hz
- 1x Headphone / microphone combo jack (3.5mm)

### Optional Ports<sup>\*\*\*</sup>

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)

#### Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

## Docking

### Docking

Various docking solutions supported via Thunderbolt™ / USB-C®.

For more compatible docking solutions, please visit [Docking for ThinkPad® X13 Yoga® Gen 4](#)

## SECURITY & PRIVACY

### Security

#### Security Chip

Discrete TPM 2.0, TCG certified, FIPS 140-2 certified

#### Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

#### Smart Card Reader

- Smart card reader, supports ISO 7816 and EMV
- No smart card reader

#### Fingerprint Reader

- Touch style fingerprint reader integrated in power button, match-on-chip
- No fingerprint reader

#### BIOS Security

- Supervisor password
- Power-on password
- System management password
- NVMe® password
- Certificate based BIOS authentication
- FIDO (Fast Identity Online) authentication
- Self-healing BIOS

#### Other Security

- Camera privacy shutter (camera models)
- (Optional) IR camera for Windows® Hello (facial recognition)
- Glance by Mirametrix®
- Ultrasonic Human Presence Detection (IR camera models)

## MANAGEABILITY

### System Management

#### System Management

- Intel® vPro® Enterprise<sup>[1]</sup>
- Non-vPro®

Notes:

[1] Intel® vPro® offers a superset of DASH's defined capabilities.

## SERVICE

### Warranty

#### Base Warranty\*\*

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) limited onsite service
- No base warranty

## ACCESSORIES

### Bundled Accessories

#### Bundled Accessories\*\*\*<sup>[1]</sup>

- Lenovo® HDMI® to VGA Monitor Adapter
- Lenovo® USB-C® to DisplayPort™ Adapter
- Lenovo® USB-C® to Ethernet Adapter (1Gbps)
- Lenovo® USB-C® to VGA Adapter
- None

Notes:

[1] For more compatible accessory solutions, please visit [Accessories for ThinkPad® X13 Yoga® Gen 4](#).

## OPERATING REQUIREMENTS

### Operating Environment

#### Temperature<sup>[1]</sup>

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F ) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

#### Relative Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

#### Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

## ENVIRONMENTAL

## Sustainability

### Material

90% recycled magnesium on top cover  
90% recycled magnesium on keyboard frame  
90% recycled magnesium on bottom cover  
90% PCC recycled plastic used in speaker enclosure  
90% PCC recycled plastic used in the battery enclosure  
90% PCC recycled plastic used in standard 45W and 65W adapters  
Low-temperature solder  
Retail packaging: plastic free packaging with 100% bamboo sugarcane fiber  
Standard or bulk packaging: 90% recycled and FSC certified content

## CERTIFICATIONS

### Green Certifications<sup>[1]</sup>

#### Green Certifications<sup>[2]</sup>

- ENERGY STAR® 8.0
- EPEAT™ Gold Registered<sup>[3]</sup>
- ErP Lot 6/26
- RoHS compliant
- TCO Certified 9.0

#### Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2] EPEAT™ registration and ENERGY STAR® certification are dependent on system OS. Please visit [epeat.net](https://epeat.net) and [energystar.gov](https://energystar.gov) for more information.

[3] EPEAT™ is registered where applicable, please visit [epeat.net](https://epeat.net) for registration status by country.

### Other Certifications

#### Mil-Spec Test

MIL-STD-810H military test passed

#### Other Certifications

- (Optional) Intel® Evo™ Platform
- (Optional) Eyesafe® Certified 2.0

- Feature with \*\* means that only one offering listed under the feature is configured on selected models.

- Feature with \*\*\* means that one or more offerings listed under the feature could be configured on selected models.

- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.

- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



