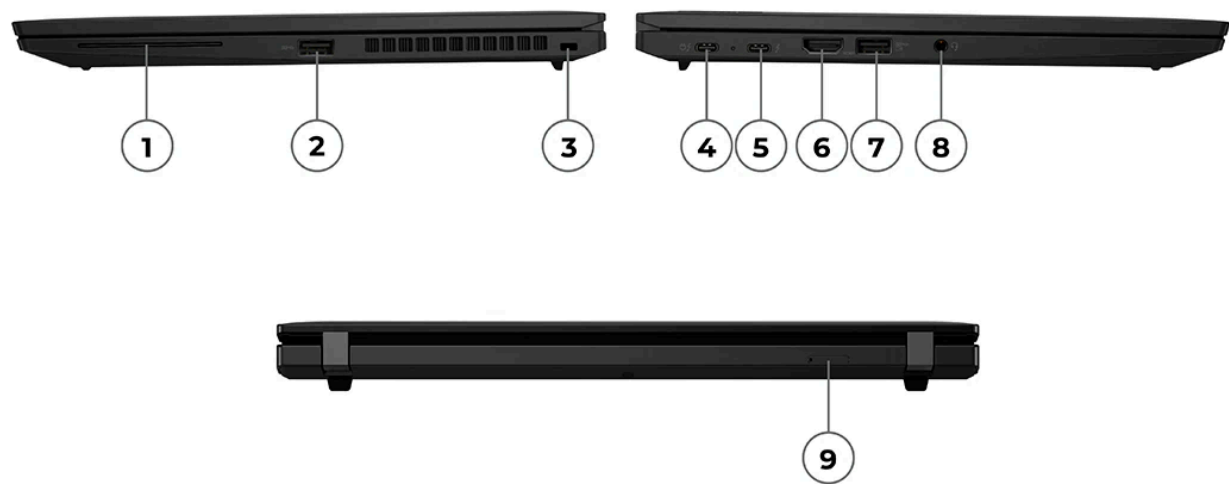# OVERVIEW

1. Smart card reader *	6. HDMI
2. USB 3.2 Gen 1	7. USB 3.2 Gen 1 (Always On)
3. Kensington Nano Security Slot	8. Headphone / microphone combo jack (3.5mm)
4. Thunderbolt 4	9. Nano-SIM card slot *
5. Thunderbolt 4	

Notes:
- Items with * are only available on selected models

PERFORMANCE

Processor

Processor Family

13th Generation Intel® U or P Series Core i5 / i7 Processor

Processor**[1]

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
Core i5-1335U	10 (2 P-core + 8 E-core)	12	P-core 1.3GHz / E-core 0.9GHz	P-core 4.6GHz / E-core 3.4GHz	12MB	Intel® Iris® Xe Graphics
Core i5-1340P	12 (4 P-core + 8 E-core)	16	P-core 1.9GHz / E-core 1.4GHz	P-core 4.6GHz / E-core 3.4GHz	12MB	Intel® Iris® Xe Graphics
Core i5-1345U	10 (2 P-core + 8 E-core)	12	P-core 1.6GHz / E-core 1.2GHz	P-core 4.7GHz / E-core 3.5GHz	12MB	Intel® Iris® Xe Graphics
Core i7-1355U	10 (2 P-core + 8 E-core)	12	P-core 1.7GHz / E-core 1.2GHz	P-core 5.0GHz / E-core 3.7GHz	12MB	Intel® Iris® Xe Graphics
Core i7-1360P	12 (4 P-core + 8 E-core)	16	P-core 2.2GHz / E-core 1.6GHz	P-core 5.0GHz / E-core 3.7GHz	18MB	Intel® Iris® Xe Graphics
Core i7-1365U	10 (2 P-core + 8 E-core)	12	P-core 1.8GHz / E-core 1.3GHz	P-core 5.2GHz / E-core 3.9GHz	12MB	Intel® Iris® Xe Graphics
Core i7-1370P	14 (6 P-core + 8 E-core)	20	P-core 1.9GHz / E-core 1.4GHz	P-core 5.2GHz / E-core 3.9GHz	24MB	Intel® Iris® Xe Graphics

Notes:

[1] Intel® P series processors are for special bid only.

Operating System

Operating System**

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Windows® 11 DG Windows® 10 Pro 64
- Ubuntu Linux[1]
- Linux[2]
- No preload operating system

Notes:

[1], [2] Some features may not be supported on the system with Linux preload, including but not limited to Intel® RST RAID, MIPI computer vision camera, WWAN, Human Presence Detection, etc.

Graphics

Graphics

Graphics	Type	Memory	Key Features
Intel® Iris® Xe Graphics	Integrated	Shared	DirectX® 12.1

Monitor Support

Monitor Support[1]

Supports up to 4 independent displays (native display and 3 external monitors via Thunderbolt™ and HDMI®)
• HDMI® supports up to 4K@60Hz
• Thunderbolt™ supports up to 5K@60Hz

Notes:

[1] Refresh rates >60hz also supported, however max resolution will be limited.

Chipset

Chipset

Intel® SoC (System on Chip) platform

Memory

Max Memory

- 16GB soldered memory, not upgradable
- 32GB soldered memory, not upgradable

Memory Slots

Memory soldered to systemboard, no slots, dual-channel

Memory Type

LPDDR5x-4800[1]

Notes:

[1] Installed memory is actually LPDDR5x-6400 but runs as LPDDR5x-4800 due to platform limitation.

Storage

Max Storage Support[1]

One drive, up to 2TB M.2 2280 SSD

Storage Slot

One M.2 2280 PCIe® 4.0 x4 slot

Storage Type**

Disk Type	Interface	Offering	Security
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	256GB / 512GB / 1TB	Opal 2.0
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4 Performance	512GB / 1TB / 2TB	Opal 2.0

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.

Removable Storage

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 2W x2, Dolby Audio™

Microphone

- Dual-microphone array, 360° far-field, Dolby Voice®
- No microphone[1]

Camera**

- FHD 1080p, with privacy shutter, fixed focus
- 5.0MP + IR discrete, with privacy shutter, fixed focus
- No camera[2]

Notes:

[1] No microphone is for special bid only.
[2] No camera is for special bid only.

Battery

Battery[1]

57Wh Rechargeable Li-ion Battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

Battery Life[2]

Configuration 1 (max battery life)
MobileMark® 25: up to 12.4 hr @250nits
JEITA 2.0: up to 24.5 hr @150nits
Local video playback: up to 19.6 hr @150nits

Alternate configuration 2
MobileMark® 25: up to 12.0 hr @250nits
JEITA 2.0: up to 18.0 hr @150nits
Local video playback: up to 16.5 hr @150nits

Alternate configuration 3
MobileMark® 25: up to 11.2 hr @250nits
JEITA 2.0: up to 24.1 hr @150nits
Local video playback: up to 18.6 hr @150nits

Notes:

[1] Rapid charge is only guaranteed when the computer is turned off or in standby mode or in hibernation mode. When the computer is powered on, the Charge Time will vary depending on system power consumption and AC adapter power.

[2] Configuration 1 (max battery life): WUXGA low power (non-touch), Intel® i5-1335U, 16GB LPDDR5x, Win 11, 57Wh battery, best power efficiency power mode
Alternate configuration 2: WUXGA (touch), Intel® i5-1345U, 16GB LPDDR5x, Win 11, 57Wh battery, best power efficiency power mode
Alternate configuration 3: WUXGA low power (non-touch), Intel® i5-1340P, 16GB LPDDR5x, Win 11, 57Wh battery, best power efficiency power mode

All battery life claims are approximate maximum and based on results using MobileMark® 25, JEITA 2.0, continuous 1080p local video playback (using default Media Player in Fullscreen mode with 150nits brightness and default volume level), or Google Power Load Test (PLT) battery-life benchmark tests.
Actual battery life will vary depending on many factors such as product configuration, software, wireless functionality, power management settings, and screen brightness.
The maximum capacity of the battery will decrease with time, ambient temperature and use.
Refer to Microsoft® link for more information about the Windows® Performance power slider.

Power Adapter

Power Adapter**[1]

- 45W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 45W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter[2]

Notes:

[1] AC adapter offerings depend on the country.

[2] No power adapter is for special bid only.

DESIGN

Display

Display**[1]

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Refresh Rate	Viewing Angle (L/R/U/D)	Key Features
14″	WUXGA (1920x1200)	Non-touch	IPS[2]	300nits	Anti-glare	16:10	600:1	45% NTSC	60Hz	85° / 85° / 85° / 85°	-
14″	WUXGA (1920x1200)	Multi-touch	IPS[3]	300nits	Anti-glare	16:10	600:1	45% NTSC	60Hz	85° / 85° / 85° / 85°	-
14″	WUXGA (1920x1200)	Non-touch	IPS[4]	400nits	Anti-glare	16:10	800:1	100% sRGB	60Hz	85° / 85° / 85° / 85°	Low power, Eyesafe®

14″	WUXGA (1920x1200)	Multi-touch	IPS[5]	500nits	Anti-glare	16:10	1500:1	100% sRGB	60Hz	89° / 89° / 89° / 89°	ThinkPad® Privacy Guard
14″	2.2K (2240x1400)	Non-touch	IPS[6]	300nits	Anti-glare	16:10	1000:1	100% sRGB	60Hz	85° / 85° / 85° / 85°	TÜV Low Blue Light (Hardware Solution)
14″	2.8K (2880x1800)	Non-touch	OLED	400nits	Anti-glare, anti-reflection, anti-smudge	16:10	100,000:1	100% DCI-P3	60Hz	85° / 85° / 85° / 85°	DisplayHDR™ True Black 500, Dolby Vision®, Eyesafe® Certified 2.0

Touchscreen

- On-cell multi-touch, supports 10-point touch
- Non-touch

Notes:

[1] 2.2K display is NOT available in EMEA.

[2], [3], [4], [5], [6] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

Input Device

Pen

No support

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls

Keyboard Backlight

LED backlight

UltraNav™

TrackPoint® pointing device and glass-like Mylar® surface multi-touch 3-button Trackpad, 61 x 115 mm (2.40 x 4.53 inches)

Mechanical

Dimensions (WxDxH)[1]

317.5 x 226.9 x 16.9 mm (12.5 x 8.93 x 0.67 inches)

Weight[2]

Models	Weight
Deep black models	Starting at 1.25 kg (2.76 lbs)
Storm grey models	Starting at 1.48 kg (3.26 lbs)

Case Color**

- Deep black
- Storm grey

Case Material**

- Deep black models: carbon fiber hybrid (top), aluminium (bottom)
- Storm grey models: aluminium (top), aluminium (bottom)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

WLAN + Bluetooth®

Intel® Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3[1]

WWAN**

- Wireless WAN upgradable to 4G (with antenna ready)[2]
- Quectel EM05-G, 4G LTE CAT4, M.2 card, with embedded eSIM functionality
- Fibocom L860-GL-16, 4G LTE CAT16, M.2 card, with embedded eSIM functionality
- Fibocom FM350-GL, 5G Sub-6 GHz, M.2 card, with embedded eSIM functionality
- No support

SIM Card

- KDDI eSIM Program (Japan)
- No physical SIM card inbox

Ethernet

No onboard Ethernet[3]

NFC

- Near Field Communication
- No support

Notes:

[1] Wi-Fi® 6E full features might be limited by country-level restrictions.
Wi-Fi® 6E is only enabled on Windows® 11 and operates as Wi-Fi® 6 with Windows® 10.
6GHz Wi-Fi® 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi® 6E, and the regional regulatory certifications & spectrum allocation.
Bluetooth® 5.3 operation requires Windows® 11. For more information please visit General Bluetooth® Support Information on Microsoft®.
[2] Wireless WAN upgradable to 4G is only available in EMEA.
[3] Ethernet support via optional Lenovo® USB-C® to Ethernet Adapter.

Ports[1]

Standard Ports

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 2x Thunderbolt™ 4 / USB4® 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort™ 2.0)
- 1x HDMI® 2.1, up to 4K/60Hz
- 1x Headphone / microphone combo jack (3.5mm)

Optional Ports***

- 1x Nano-SIM card slot (WWAN support models)
- 1x Smart card reader

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;
Thunderbolt™ 3/4: 40 Gbit/s.

Docking

Docking

Various docking solutions supported via Thunderbolt™ / USB-C®.
For more compatible docking solutions, please visit Docking for ThinkPad® T14s Gen 4 (Intel®)

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified, FIPS 140-2 certified

Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

Smart Card Reader

- Smart card reader, supports ISO 7816 and EMV
- No smart card reader

Fingerprint Reader

- Touch style fingerprint reader integrated in power button, match-on-chip
- No fingerprint reader

BIOS Security

- NVMe® password
- Power-on password
- Supervisor password
- System management password
- Certificate-based BIOS authentication
- FIDO (Fast Identity Online) authentication
- Self-healing BIOS

Other Security

- Camera privacy shutter (camera models)
- Ultrasonic Human Presence Detection (IR camera models)
- (Optional) IR camera for Windows® Hello (facial recognition)
- Glance by Mirametrix®
- Privacy Guard with Privacy Alert (models with ThinkPad® Privacy Guard display)

MANAGEABILITY

System Management

System Management[1]

- Intel® vPro® Enterprise[2]
- Non-vPro®

Notes:

[1] All versions of the Intel® vPro®® platform require an eligible Intel® processor, a supported operating system, Intel®® LAN and/or WLAN silicon, firmware enhancements, and other hardware and software necessary to deliver the manageability use cases, security features, system performance, and stability that define the platform. See Intel® vPro® Platform for details.

[2] Intel® vPro® offers a superset of DASH's defined capabilities.

SERVICE

Warranty

Base Warranty**

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) limited onsite service
- No base warranty

ACCESSORIES

Bundled Accessories

Bundled Accessories***[1]

- Lenovo® HDMI® to VGA Monitor Adapter
- Lenovo® USB-C® to DisplayPort™ Adapter

- Lenovo® USB-C® to Ethernet Adapter (1Gbps)
- Lenovo® USB-C® to VGA Adapter
- None

Notes:

[1] For more compatible accessory solutions, please visit Accessories for ThinkPad® T14s Gen 4 (Intel®).

OPERATING REQUIREMENTS

Operating Environment

Temperature[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Relative Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

ENVIRONMENTAL

Sustainability

Material[1]

22% recycled carbon fiber hybrid or 55% recycled aluminium on top cover
55% recycled aluminum on bottom cover
98% PCC recycled plastic used in speaker enclosure
97% recycled plastic used in the 57Wh battery frame
90% PCC recycled plastic used in standard 45W and 65W adapter
Low-temperature solder
Standard packaging: 90% plastic free packaging
Bulk packaging: 90% recycled and FSC certified content

Notes:

[1] PCC: Post Consumer Content, recycled materials from customers.

CERTIFICATIONS

Green Certifications[1]

Green Certifications[2]

- ENERGY STAR® 8.0
- EPEAT™ Gold Registered[3]
- ErP Lot 6/26
- RoHS compliant
- TCO Certified 9.0

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit https://compliance.lenovo.com.
[2] EPEAT™ registration and ENERGY STAR® certification are optional and only available on the models with preloaded OS. Please visit epeat.net and energystar.gov for more information.
[3] EPEAT™ is registered where applicable, please visit epeat.net for registration status by country.

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

Other Certifications

- (Optional) Eyesafe® Certified 2.0
- (Optional) Intel® Evo™ Platform
- (Optional) TÜV Rheinland® Low Blue Light (Hardware Solution)

- Feature with ** means that only one option listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.

- Feature with *** means that one or more options listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.

- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.

- The specifications on this page may not be available in all regions, and may be changed or updated without notice.